



RESYS M40

Type A differential relays
for motor load break

Electronic
protection

new



resys_083_a_1_cat

Function

RESYS M40 earth leakage relays associated with a remote trip breaking device (automatic power breaking), provide the following functions:

- protection against indirect contact,
- limitation of leakage currents.

They also preventively monitor electrical installations via their (configurable) pre-alarm function or when used as signalling relays.

Advantages

Fully configurable

- 2 relays with configurable function (alarm or pre-alarm at 50% $I_{\Delta n}$)
- Adjustment of $I_{\Delta n}$ from 0.03 to 30 A.
- Time delay 0 to 10 s.
- Positive or negative security configurable by the user.
- Selection of toroid ratio.

Tripping accuracy by TRMS measurement.

Improves immunity to nuisance tripping.

Instantaneous display of permanent leakage currents.

The LED bargraph provides a real-time display of fluctuations in leakage currents.

Compact modular design

44 mm in width, the unit allows easy integration into dedicated enclosures. The adjustment buttons are protected by a sealable cover, while the display of available alarms is displayed directly on the front face of the device.

Improved immunity to EMC interferences

The device has new electronics which improve electromagnetic compatibility.

The solution for

- > Processes.
- > Manufacturing.
- > Oil, gas and petrochemistry.
- > Energy production.

Strong points

- > Fully configurable.
- > Measurement accuracy by TRMS (True Root Mean Square).
- > Instantaneous display of permanent leakage currents.
- > Compact and modular case with LED bargraph.
- > Improved immunity to EMC interferences.

Conformity to standards

- > IEC 60755
- > IEC 60947-2
- > IEC 62020
- > IEC 60364



Approvals and certifications⁽¹⁾




(1) Product reference on request.

Applications


Rapid recognition of an insulation fault increases the availability of the distribution network by preventing accidental power cuts and the resulting loss of production.

Protection against fire or explosion risks

The use of Residual Differential Devices (with adjustment $I_{\Delta n} \leq 300$ mA) provides protection against the risk of fire or explosion generated by tracking currents to earth, in areas classed as BE2 or BE3 respectively. This protection is mandatory in TT, TN and IT neutral systems.

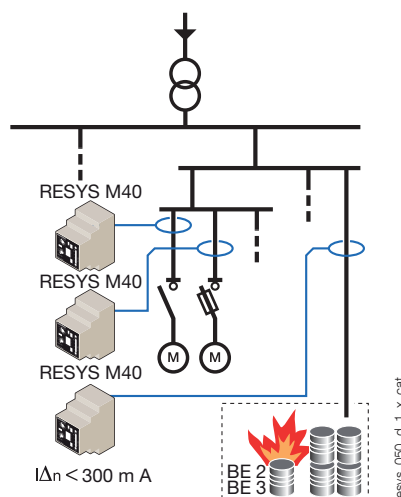

Front panel

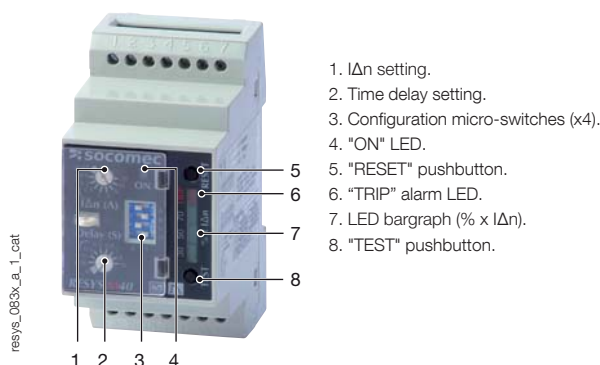

General characteristics

- RESYS M40 with 2 configurable relays:
 - either 2 alarm relays,
 - or 1 alarm relay and 1 pre-alarm relay (50 % $I_{\Delta n}$).
- Adjustment sensitivity from 0.03 mA to 30 A.
- Time delay 0 to 10 s.
- Tripping accuracy by TRMS measurement.
- Automatic instantaneous tripping at 30 mA.
- Positive or negative security configurable by the user.
- Selection of toroid ratio.
- Automatic permanent relay-toroid connection test.
- Sealable cover.

Characteristics

Auxiliary power supply U_s

Frequency	47 ... 63 Hz
AC operating zone	0.8 ... 1.15 U_s
DC operating zone	0.8 ... 1.05 U_s
Max. consumption	6 VA (AC) / 5 W (DC)

Insulation (according to IEC 60664-1 standard)

Rated insulation voltage	250 VAC
Rated impulse voltage	2.5 kV (115 VAC) / 4 kV (230/400 VAC)
Degree of pollution	Class 3

Threshold values

$I_{\Delta n}$ setting	0.03 - 0.1 - 0.3 - 0.5 - 1 - 3 - 5 - 10 - 30 A
Accuracy of tripping	- 20 ... - 10 % $I_{\Delta n}$
Domain of network frequency	15 ... 400 Hz
Time delay setting	0 - 0.06 - 0.15 - 0.30 - 0.50 - 0.80 - 1 - 4 - 10 s
PRE-ALARM relay tripping	50 % $I_{\Delta n}$
Hysteresis of the PRE-ALARM relay	20 % $I_{\Delta n}$

Alarm

Alarm configuration mode	storage / automatic reset
Alarm factory setting	storage
Reset	manual by pushbutton / using terminal

Output contacts


Number of contacts	2
Type of ALARM 1 contact	250 VAC - 8 A - 2000 VA
Type of ALARM 2 or PRE-ALARM contact	250 VAC - 6 A - 1500 VA
ALARM 1 operating mode	positive / negative security ⁽¹⁾
ALARM 2 or PRE-ALARM operating mode	positive security ⁽¹⁾
Factory setting of ALARM 1 operating mode	negative security
Factory setting of ALARM 2 operating mode	positive security

(1) Negative security: relay activated in case of alarm / Positive security: relay not activated in case of alarm.

Operating conditions


Operating temperature	- 20 ... + 55 °C
Storage temperature	- 30 ... + 70 °C

Case

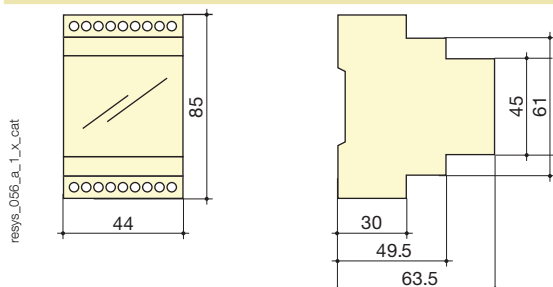

Type	modular
Number of modules	2.5
Dimensions W x H x D	44 x 85 x 63.5
Case protection index	IP40
Terminal protection index	IP20
Rigid cable cross-section	0.2 ... 4 mm ²
Flexible cable cross-section	0.2 ... 2.5 mm ²
Weight	190 g

Terminals and connections

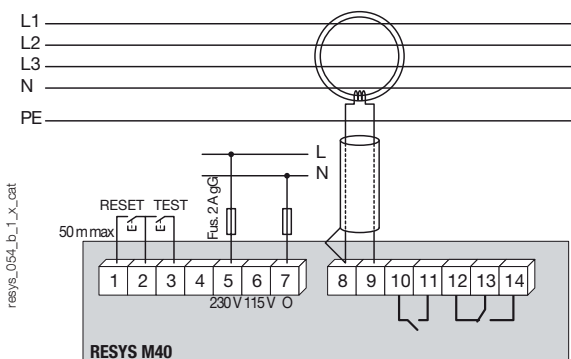

- 1 - 2 - 3: external pushbuttons
- 5 - 6 - 7: auxiliary power supplies U_s
- 8 - 9: SOCOMEC differential toroid connections
- 10 - 11: alarm relay 2 or pre-alarm outputs
- 12 - 13 - 14: alarm relay 1 output

Note: The earth conductor must not pass through the C.T.

For single phase applications, only the live and neutral need to be passed through the C.T.

Cabling: for distances > 1 m, use twisted pair cable between the unit and C.T. Do not connect the shield to earth.

References

Auxiliary power supply U_s ⁽¹⁾

115 / 230 VAC
400 VAC
12 ... 125 VDC

RESYS M40 Reference

4941 3723 ⁽²⁾
4941 3740 ⁽²⁾
4941 3602 ⁽²⁾

(1) Other rating: Please consult us. (2) References and characteristics of closed, split core and rectangular toroids: see "Core balance transformers type A" p. 522.