




Introducing the **Easy Series**

Essential automation & control products

When just enough is just right!

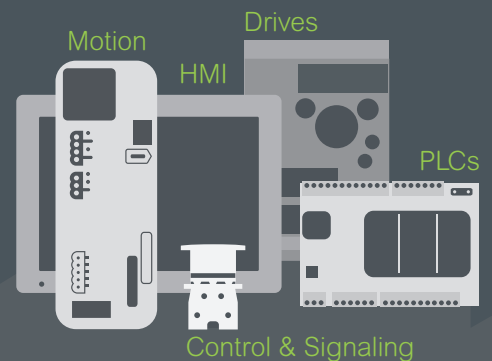

Easy Lexium 18

Easy Lexium 18 Servo drives
& BCH18 Servo motors

Content

Easy Lexium 18

Easy Lexium 18 servo drives & BCH18 servo motors

■ Easy Lexium 18 servo drives

□ Widely used in various machinery.....	p. 2
□ Easy Lexium 18 range	p. 2
□ Applications	p. 2
□ Mounting and maintenance	p. 2
□ Functions	p. 3
□ Configuration software.....	p. 3
□ Easy Lexium 18 servo drives/BCH18 servo motors combinations	p. 4
□ References, dimensions and weights	p. 5
□ Description	p. 5
□ References	
- Connectors	p. 6
- Modbus TCP network cordsets	p. 6
- Braking resistor (option)	
- Application.....	p. 7
- References	p. 7
□ Additional EMC input filters	p. 8
□ Motor starters	p. 9
□ Protection using fuses	p. 9

■ BCH18 servo motors

□ Presentation, Description	p. 10
□ Holding brake controller (option).....	p. 10
□ Integrated encoder	p. 10
□ References	p. 11
□ Dimensions, Weights	p. 12
□ Connection components	
- Unshielded Power cables	p. 13
- Motor power connector kits.....	p. 14
- Shielded Encoder cables	p. 15
- Motor encoder connector kits.....	p. 15

■ Product reference index..... p. 16


Easy Lexium 18

Easy Lexium 18 servo drives & BCH18 servo motors

Easy Lexium 18 range



E&E application

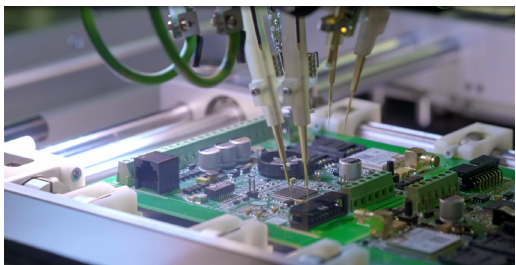

Semicon application



Packaging application



Material Working application

Widely used in various machinery

A user-oriented range of products

Easy Lexium 18 servo drive and BCH18 servo motor combinations are specially designed for easy integration & commissioning in your machine. They provide the right level of performance for the majority of various motion control machines.

Fit for purpose

- Easy Lexium 18 servo drives have 10 digital inputs (including 2 fast inputs), 6 digital outputs.
- The servo drives embed an internal braking resistor, incorporate auto-tuning and position control.

Easy throughout the whole life cycle

- Easy to select and order thanks to the "just enough" number of references
- Easy to mount and wire up
- Easy to set up and commission thanks to SoMove software
- Easy to tune due to easy, comfortable and auto-adaptive tuning function
- Easy to connect to our range of Easy Modicon M200 and Easy Modicon M100 logic controllers

Robustness

- Motor shafts have degree of protection IP 65 as standard
- The motors can operate in temperatures from 0 to 40°C/ 32 to 104°F
- The drive printed circuit boards are coated for enhanced robustness in polluted environments

Widely available everywhere

- Fast delivery through a large distribution network
- Fast access to information and support through the Partner Relationship Management tool and a dedicated network of engineers

Easy Lexium 18 range

The Easy Lexium™ 18 range is defined by AC-servo drives for combination with AC-servo motors according to customer's application.

- The Easy Lexium 18 range offers predefined combinations to suit the requirements of motion control applications and optimize the installation's performance.
- The combinations of servo motors with servo drives are based on the power class: both the servo motor and servo drive have the same power class (1).
- The combination of servo drive with its related servo motor is designed to cover a nominal power range:
 - from 0.1 kW (0.3 hp) up to 1.5 kW (2.01 hp) with Single phase 220Vac, 200Vac -15%...240Vac +10% mains supply voltage (1),
 - and from 2.0 kW (2.68 hp) up to 3.0 kW (4.02 hp) with Three phase 220Vac, 200Vac -15%...240Vac +10% mains supply voltage
- BCH18 motors provide a nominal torque from 0.16 N-m (1.42 lb-in) to 28.6 N-m (253,13 lb-in) and a nominal speed from 1,000 to 3,000 rpm, depending on the model. They are suitable for a wide variety of applications due to the different inertia levels of motor offered.
- The Easy Lexium 18 servo drives have degree of protection IP 20.

Applications

Simple machines with Position Control Applications (Low or high speed speed positioning, simple movement, P2P applications)


Segments

Electrical and Electronic	Semicon	Packaging	Material Working
Typical applications			
- Die Cutting - Winding - Testing - Glue Dispenser	- Flying Probe Checking - Wafer Testing - Cristal Growing Furnace	- Labeling - Folding - Sealing - Strapping	- Laser Cutting - Bending - Beading - Carving


Mounting and maintenance

Connecting the servo drives is simplified by identified plug-in connectors for Power and Encoder, easily accessed on the front panel of the drive (see [Description](#) page 5).


(1) See table of combinations page 4.

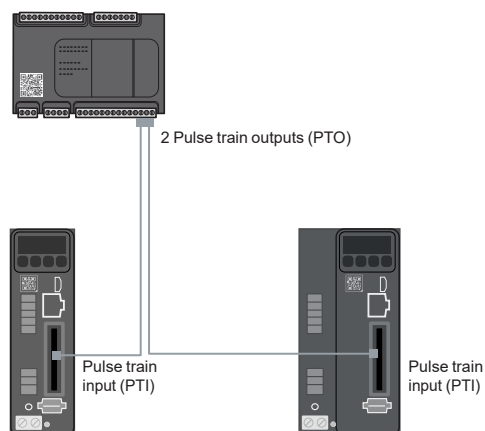

Easy Lexium 18 servo drives controlled by Easy Modicon M200 logic controller via the PTI interface

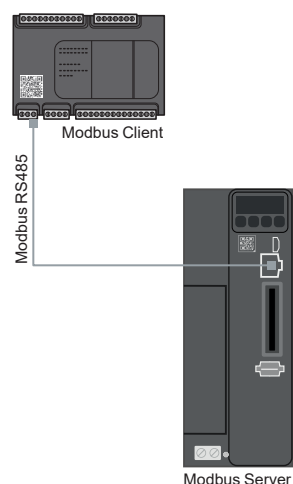

Easy Lexium 18 servo drives controlled by Easy Modicon M200 logic controller using the standard Modbus RTU protocol, via the CN4 interface (RJ45 connector)

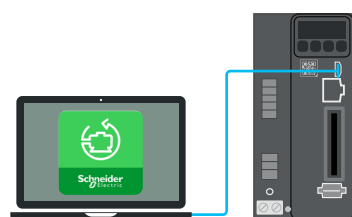

Configuration with SoMove setup software, via CN3 interface (Mini-B USB connector)



[DIA3ED2140906EN](#)

Functions

Easy Lexium 18 servo drives feature numerous functions enabling them to be used in a wide range of motion control applications.

Drive functions

Drive functions activated by the commissioning software or directly by the HMI interface

- Jog mode: Velocity movement
- “Easy tuning” one-button tuning mode: this function is used to optimize application performance.
- “Auto-adaptive tuning” with this function the drive could calculate inertia ratio automatically and adjust system performance with selected stiffness.
- “Comfort tuning” with predefined settings for different mechanical systems such as spindle axes (e.g. portal axes), transportation belts, vertical axes (e.g. cantilever axes)

Control via I/O interface

The Easy Lexium18 servo drive is controlled with numerous digital and analog signals, accessible via the “CN1 IO” interface:

- 2 digital inputs for high-performance position capture
- 8 digital inputs
- 6 digital outputs
- 2 analog inputs
- 2 analog outputs

Control mode

Via the PTI/Analog input interface

■ Easy Lexium 18 servo drives can be managed by a machine controller, Easy Modicon M200 logic controller (1) with 2 pulse-train-outputs (PTO) interface to the PTI/Analog interface located on servo drive

■ Control via Scripting)
The Easy Lexium18 servo drives support Script Programming. User can program their own motion profiles and logics by using integrated key words, such as Position / Velocity demand, Position / Velocity / Current actual value, DI / DO / timer status / internal variables, other elements and so on. By this powerful control mode Easy Lexium18 can fulfill complex motion tasks without Motion Controller.

Via Modbus RTU

The LXM18 servo drives can communicate with the PLC through a RS485 cable by using the standard Modbus RTU protocol. The interface for RS485 is RJ45 connector.

Operating mode

- Torque mode
- Velocity mode
- Electronic Gear mode
- Motion Sequence mode
- Scripting mode

Configuration software

The drives can be configured by using the SoMove setup software via their integrated HMI interface (Type-C):

- for commissioning, parameter setting, diagnostics and maintenance
- for fast device replacement in existing machine installations
- for configuring and optimizing control loops in automatic or manual mode using the Oscilloscope function.
- SoMove setup software is used on Easy Lexium 18 servo drives to configure, adjust, debug, and maintain the drive.
- A configuration can be transferred from a PC to the Easy Lexium 18 servo drive via the CN3 interface (Type-C).
- SoMove setup software can be downloaded from [Schneider website](#)

(1) Please consult our catalog ref [DIA3ED2140906EN](#)



LXM18P0U01M2X
LXM18P0U02M2X
LXM18P0U04M2X



LXM18P0U07M2X
LXM18P0U10M2X



LXM18P0U20M3X
LXM18P0U30M3X

Easy Lexium 18 servo drive and BCH18 motor combination

Servo drive reference	Servo motor reference (1)	Nominal Power		Flange size		Velocity		Current		Torque		Motor Inertia	Moment of inertia	Holding Brake	
		kW	hp	mm	in	rpm	rpm	Nominal A	Max. A	Nominal N-m	Peak N-m				
Single-phase supply voltage: 220Vac, 200Vac -15%...240Vac +10%															
LXM18PCU01M2X	BCH18LBA5332A5C	0.05	0.06	40	1.57	3000	6000	1.1	3.4	0.16	0.48	0.02	Low	No	
LXM18PDU01M2X	BCH18LBA5332F5C	0.05	0.06	40	1.57	3000	6000	1.1	3.4	0.16	0.48	0.027	Low	Yes	
	BCH18MBA5332A5C	0.05	0.06	40	1.57	3000	6000	1.1	3.9	0.16	0.56	0.04	Middle	No	
	BCH18MBA5332F5C	0.05	0.06	40	1.57	3000	6000	1.1	3.9	0.16	0.56	0.046	Middle	Yes	
	BCH18LB01332A5C	0.10	0.13	40	1.57	3000	6000	1.1	3.4	0.32	0.96	0.030	Low	No	
	BCH18LB01332F5C	0.10	0.13	40	1.57	3000	6000	1.1	3.4	0.32	0.96	0.036	Low	Yes	
	BCH18MB01332A5C	0.10	0.13	40	1.57	3000	6000	1.1	3.9	0.32	1.12	0.07	Middle	No	
	BCH18MB01332F5C	0.10	0.13	40	1.57	3000	6000	1.1	3.9	0.32	1.12	0.076	Middle	Yes	
	BCH18MD01332A5C	0.10	0.13	60	2.36	3000	6000	1.1	3.4	0.32	0.96	0.16	Middle	No	
	BCH18MD01332F5C	0.10	0.13	60	2.36	3000	6000	1.1	3.4	0.32	0.96	0.22	Middle	Yes	
	LXM18PCU02M2X	BCH18LD02332A5C	0.20	0.27	60	2.36	3000	6000	1.6	5.1	0.64	1.92	0.15	Low	No
LXM18PDU02M2X		BCH18LD02332F5C	0.20	0.27	60	2.36	3000	6000	1.6	5.1	0.64	1.92	0.21	Low	Yes
		BCH18MD02332A5C	0.20	0.27	60	2.36	3000	6000	1.6	5.9	0.64	2.24	0.268	Middle	No
		BCH18MD02332F5C	0.20	0.27	60	2.36	3000	6000	1.6	5.9	0.64	2.24	0.328	Middle	Yes
		BCH18MF02332A5C	0.20	0.27	80	3.15	3000	6000	1.6	5.1	0.64	1.92	0.55	Middle	No
		BCH18MF02332F5C	0.20	0.27	80	3.15	3000	6000	1.6	5.1	0.64	1.92	0.68	Middle	Yes
LXM18PCU04M2X	BCH18LD04332A5C	0.40	0.54	60	2.36	3000	6000	2.8	8.5	1.27	3.81	0.25	Low	No	
	LXM18PDU04M2X	BCH18LD04332F5C	0.40	0.54	60	2.36	3000	6000	2.8	8.5	1.27	3.81	0.31	Low	Yes
		BCH18MD04332A5C	0.40	0.54	60	2.36	3000	6000	2.6	9.3	1.27	4.45	0.478	Middle	No
		BCH18MD04332F5C	0.40	0.54	60	2.36	3000	6000	2.6	9.3	1.27	4.45	0.54	Middle	Yes
		BCH18MF04332A5C	0.40	0.54	80	3.15	3000	6000	2.6	9.3	1.27	4.45	1.19	Middle	No
		BCH18MF04332F5C	0.40	0.54	80	3.15	3000	6000	2.6	9.3	1.27	4.45	1.33	Middle	Yes
LXM18PCU07M2X	BCH18LF07332A5C	0.75	1.01	80	3.15	3000	6000	5.1	15.6	2.39	7.17	0.78	Low	No	
	LXM18PDU07M2X	BCH18LF07332F5C	0.75	1.01	80	3.15	3000	6000	5.1	15.6	2.39	7.17	0.93	Low	Yes
		BCH18MF07332A5C	0.75	1.02	80	3.15	3000	6000	4.9	17.3	2.39	8.37	1.79	Middle	No
		BCH18MF07332F5C	0.75	1.02	80	3.15	3000	6000	4.9	17.3	2.39	8.37	1.9	Middle	Yes
LXM18PCU10M2X	LXM18PDU10M2X	BCH18MM08132A6C	0.85	1.15	130	5.12	1500	3000	7.3	22	5.39	16.17	14	Middle	No
		BCH18MM08132F6C	0.85	1.15	130	5.12	1500	3000	7.3	22	5.39	16.17	14.7	Middle	Yes
		BCH18LF10332A5C	1.00	1.34	80	3.15	3000	6000	6.8	21.5	3.18	9.54	0.994	Low	No
		BCH18LF10332F5C	1.00	1.34	80	3.15	3000	6000	6.8	21.5	3.18	9.54	1.12	Low	Yes
		BCH18MF10332A5C	1.00	1.34	80	3.15	3000	6000	6.5	22.8	3.18	11.1	2.16	Middle	No
		BCH18MF10332F5C	1.00	1.34	80	3.15	3000	6000	6.5	22.8	3.18	11.1	2.32	Middle	Yes
		BCH18LH10332A6C	1.00	1.34	100	3.94	3000	6000	7.3	22	3.18	9.54	1.43	Low	No
		BCH18LH10332F6C	1.00	1.34	100	3.94	3000	6000	7.3	22	3.18	9.54	1.53	Low	Yes
LXM18PCU15M2X	LXM18PDU15M2X	BCH18MM13132A6C	1.30	1.76	130	5.12	1500	3000	9.6	29.2	8.34	25	20.88	Middle	No
		BCH18MM13132F6C	1.30	1.76	130	5.12	1500	3000	9.6	29.2	8.34	25	21.54	Middle	Yes
		BCH18LH15332A6C	1.50	2.01	100	3.94	3000	6000	9.2	28.8	4.77	14.3	2.09	Low	No
		BCH18LH15332F6C	1.50	2.01	100	3.94	3000	6000	9.2	28.8	4.77	14.3	2.21	Low	Yes
Three-phase supply voltage: 220Vac, 200Vac -15%...240Vac +10%															
LXM18PCU20M3X	LXM18PDU20M3X	BCH18MM18132A6C	1.80	2.44	130	5.12	1500	3000	14	42	11.5	32.2	27.79	Middle	No
		BCH18MM18132F6C	1.80	2.44	130	5.12	1500	3000	14	42	11.5	32.2	28.45	Middle	Yes
		BCH18LH20332A6C	2.00	2.68	100	3.94	3000	6000	13.2	41	6.37	19.1	2.64	Low	No
		BCH18LH20332F6C	2.00	2.68	100	3.94	3000	6000	13.2	41	6.37	19.1	2.74	Low	Yes
LXM18PCU30M3X	LXM18PDU30M3X	BCH18MR24132A6C	2.40	3.26	180	7.09	1500	3000	18.6	56	15.1	45.1	46.32	Middle	No
		BCH18MR24132F6C	2.40	3.26	180	7.09	1500	3000	18.6	56	15.1	45.1	51.1	Middle	Yes
		BCH18LM30332A6C	3.00	4.02	130	5.12	3000	6000	18.6	56	9.8	29.4	7.63	Low	No
		BCH18LM30332F6C	3.00	4.02	130	5.12	3000	6000	18.6	56	9.8	29.4	8.3	Low	Yes

(1) Equipped with 23bit optic incremental encoder.

Easy Lexium 18


Easy Lexium 18 servo drives & BCH18 servo motors

Easy Lexium 18 servo drives

Easy Lexium 18 servo drives

To order a Easy Lexium 18 servo drive, make up the reference as follows

Easy Lexium 18 AC servo drive		LXM18	•	•	•••	••	•
Product Line	Pro line	P					
Communication interface	I/O interface with PTI only	C					
	I/O interface with PTI, Analog and MODBUS RTU	D					
Continuous power	0.1 kW/0.13 hp	U01					
	0.2 kW/0.27 hp	U02					
	0.4 kW/0.54 hp	U04					
	0.75 kW/1.01 hp	U07					
	1 kW/1.34 hp	U10					
	1.5 kW/2.01 hp	U15					
	2.0 kW/2.68 hp	U20					
Power Supply Voltage	Single phase, 220 Vac	M2					
	Three phases, 220 Vac	M3					
Special function	No built-in EMC filter						X

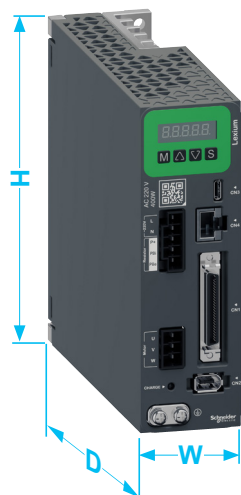

Dimensions, weight

Servo drive reference	Housing	Dimensions						Weight	
		H (height)		W (width)		D (depth)		kg	lb
		mm	in	mm	in	mm	in		
LXM18PCU01M2X LXM18PDU01M2X LXM18PCU02M2X LXM18PDU02M2X LXM18PCU04M2X LXM18PDU04M2X	Size 1	155.5	6.12	48	1.89	166.5	6.55	1.19	2.62
LXM18PCU07M2X LXM18PDU07M2X LXM18PCU10M2X LXM18PDU10M2X LXM18PCU15M2X LXM18PDU15M2X	Size 2	155.5	6.12	78	3.07	166.5	6.55	1.79	3.95
LXM18PCU20M3X LXM18PDU20M3X LXM18PCU30M3X LXM18PDU30M3X	Size 3	208	8.19	93	3.66	191.8	7.55	2.89	6.37


Description

On the drive front:

- HMI interface, 7-segment display, 4 buttons (mode, value up, value down, set)
- QR code: link to SE product maintenance page
- Type-C connector for commissioning the servo drives (marked CN3)
- RJ45 connector for Modbus RS485 (marked CN4)
- Connector for power (marked L, N, P+, PBi, PBe) (1)
- I/O interface (PTI/Analog interface, marked CN1)
- Connector (1) for motor connection (marked U, V, W)
- Connector for motor encoder (marked CN2)
- Charge indicator LED
- Protected earth ground connector (marked $\oplus$)

On the drive top

- Heatsink and fan + fan cover on servo drive size 2 and 3
Heatsink on servo drive size 1

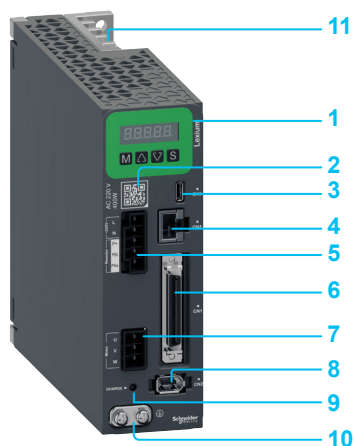

(1) Removable spring terminals are supplied with Easy Lexium 18 servo drives.

Easy Lexium 18

Easy Lexium 18 servo drives & BCH18 servo motors

Connection accessories for Easy Lexium 18 servo drives



VW3M4B01

Connection accessories for Easy lexium 18 servo drives				
Designation	Description	For use with	Reference	Weight kg/ lb
Connectors				
Connector set for power & motor	Servo drive power input and output connector kit	LXM18PCU●●● LXM18PDU●●●	VW3M4B01	0.012 0.026
IO connector	SCSI 50-pin IO connector kit	LXM18PCU●●● LXM18PDU●●●	VW3M4B11	0.300 0.066
Connector kit for encoder	Firewire 1394 6-pin encoder connector kit	LXM18PCU●●● LXM18PDU●●●	VW3M4B21	0.008 0.018



490NTW000●●●
490NTC000●●●
490NTW000●●●U

Modbus TCP network cordsets				
Description	Type of port	Length m ft (2)	Reference	Weight kg lb
Straight shielded twisted pair cordsets (conforming to EIA/TIA-568, category 5 and IEC1180/EN50173, class D standards)	2 RJ45 connectors	2 6.56	490NTW00002	—
		5 16.40	490NTW00005	—
		12 39.37	490NTW00012	—
Crossed shielded twisted pair cordsets	2 RJ45 connectors	5 16.40	490NTC00005	—
		15 49.21	490NTC00015	—
Straight shielded twisted pair cordsets (conforming to UL and CSA 22.1 standards)	2 RJ45 connectors	2 6.56	490NTW00002U	—
		5 16.40	490NTW00005U	—
		15 49.21	490NTW00012U	—
Crossed shielded twisted pair cordsets	2 RJ45 connectors	5 16.40	490NTC00005U	—

(1) Unshielded, non-grounded cable. Only for use on temporary connections. For permanent connections, use cable reference BMXXCAUSBH018.

(2) Also available in 40 and 80 m/131 and 262 ft lengths.

Easy Lexium 18

Easy Lexium 18 servo drives & BCH18 servo motors

Braking resistor for Easy Lexium 18 servo drives



VW3A760●R●●



VW3A773●

Braking resistor

Internal braking resistor

The built-in braking resistor absorbs the braking energy. If the DC bus voltage in the servo drive exceeds a specified value, this braking resistor is activated. The restored energy is converted into heat by the braking resistor. It enables maximum transient braking torque.

External braking resistor

When the servo motor has to be braked frequently, an external braking resistor is required to dissipate the excess braking energy. In this case, the internal braking resistor must be deactivated.

Several external braking resistors can be connected in parallel. The servo drive monitors the power dissipated in the braking resistor.


> To optimize the size of the braking resistor, the DC buses on Easy Lexium 18 servo drives in the same installation can be connected in parallel. Machines with high inertia, driving loads, and machines with fast cycles

> The operating temperature around the unit can be between 0 and + 50°C/+ 32 and + 122 °F.


References

Power rating range	Ohmic value (Ω)	Continuous power (W)	Connection	Degree of protection	Reference	Weight kg lb
100 W, 200 W, 400 W	72	400	3 m cable (9.84 ft)	IP65	VW3A7607R30	1.620 3.571
750 W, 1 kW, 1.5 kW	27	400	0.75 m cable (2.46 ft)	IP65	VW3A7603R07	0.930 2.050
2 kW, 3 kW	16	960	M6 terminal	IP20 UL	VW3A7733	4.000 8.818

NOTE: The total continuous power dissipated in the external braking resistor(s) must be less than or equal to the nominal power of the Easy Lexium 18 servo drive.

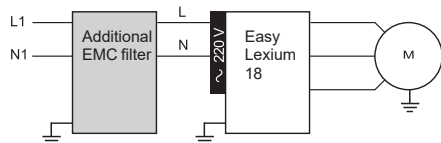

Easy Lexium 18 servo drive with additional EMC filter



VW3A442●

Additional EMC input filters

Applications

Easy Lexium 18 servo drives require external input filters to comply with the EMC standard for variable speed electrical power drive “products” IEC/EN 61800-3, edition 2, category C3 in environment 2, and to comply with the European directive on EMC (electromagnetic compatibility).

- > Additional EMC filters are mounted next to the device. They have tapped holes for mounting in an enclosure.
- > The maximum servo motor cable length conforming to IEC/EN 61800-3 category C3 (1) in environment 2 is 25 m/82.02 ft.
- > Use according to the type of line supply
- > Additional EMC filters can only be used on TN (neutral connection) or TT (neutral to ground) systems.
- > Easy Lexium 18 servo drives cannot be used on IT (impedance grounded or isolated neutral) systems. Standard IEC/EN 61800-3, appendix D2.1, states that on IT systems, filters can cause permanent insulation monitors to operate in a random manner.
- > If a machine has to be installed on an IT system, an isolation transformer must be inserted in order to recreate a TT system on the secondary side.

References

For servo drive (1 x EMC filter and a single Easy Lexium 18 servo drive)	Nominal power	Line current	Reference	Weight kg lb
Single phase 220Vac, 200Vac -15%...240Vac +10%				
LXM18PCU01M2X	0.5 to 0.75 kW	9 A	VW3A4420	0.600
LXM18PDU01M2X	(0.13 to 1.01 hp)			1.323
LXM18PCU02M2X				
LXM18PDU02M2X				
LXM18PCU04M2X				
LXM18PDU04M2X				
LXM18PCU07M2X				
LXM18PDU07M2X				
Three-phase supply voltage: 220Vac, 200Vac -15%...240Vac +10%				
LXM18PCU10M2X	1 and 1.5 kW	16 A	VW3A4421	0.775
LXM18PDU10M2X	(1.34 and 2.01 hp)			1.709
LXM18PCU15M2X				
LXM18PDU15M2X				
Three-phase supply voltage: 220Vac, 200Vac -15%...240Vac +10%				
LXM18PCU20M3X	2 and 3 kW	25 A	VW3A4423	1.350
LXM18PDU20M3X	(2.68 and 4.02 hp)			2.976
LXM18PCU30M3X				
LXM18PDU30M3X				

(1) Standard IEC/EN 61800-3: EMC immunity and conducted and radiated EMC emissions: Category C3 in environment 2: industrial premises.



GV2P●●

+




LC1●●●●●

+



LXM18P●●●●●●

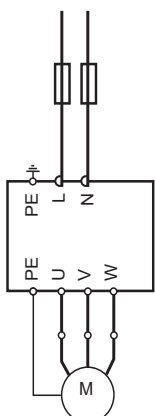

Easy LXM18 servo drive, BCH18 servo motor with fuse protection

Motor starters

Applications

The combinations listed below can be used to create a complete motor starter unit comprising a circuit-breaker, a contactor and a Easy Lexium 18 servo drive.

- The circuit-breaker provides protection against accidental short-circuits, disconnection and, if necessary, isolation.
- The contactor activates and manages any safety functions, as well as isolating the servo motor on stopping.

The servo drive controls the servo motor, provides protection against short-circuits between the servo drive and the servo motor and protects the motor cable against overloads. Overload protection is provided by the servo drive's motor thermal protection.

Combinations

Servo drive	Circuit-breaker		Contactor	
Reference	Nominal power (kW/hp)	Reference	Rating (A)	Reference (1) (2)

Circuit-breakers for single drive installation according to IEC 60364-5-52

Single phase 220Vac, 200Vac -15%...240Vac +10%

LXM18PCU01M2X LXM18PDU01M2X	0.1/0.13	GV2P14	10	LC1K0610●●
LXM18PCU02M2X LXM18PDU02M2X	0.2/0.27	GV2P14	10	LC1K0610●●
LXM18PCU04M2X LXM18PDU04M2X	0.4/0.54	GV2P14	10	LC1K09●●
LXM18PCU07M2X LXM18PDU07M2X	0.75/1.01	GV2P14	10	LC1K09●●
LXM18PCU10M2X LXM18PDU10M2X	1.0/1.34	GV2P14	10	LC1K09●●
LXM18PCU15M2X LXM18PDU15M2X	1.5/2.01	GV2P16	14	LC1D18●●

Three-phase supply voltage: 220Vac, 200Vac -15%...240Vac +10%

LXM18PCU20M3X LXM18PDU20M3X	2.0/2.68	GV2P16	14	LC1D18●●
LXM18PCU30M3X LXM18PDU30M3X	3.0/4.02	GV2P20	18	LC1D32●●

(1) Composition of the contactors:

LC1K0610●●: 3 poles + 1 N/O auxiliary contact

LC1K09●●, LC1K12●●: 4 poles

LC1D18●●: 3 poles + 1 N/O auxiliary contact + 1 N/C auxiliary contact

Please refer to [CONTACTORS AND PROTECTION RELAYS](#) page on our web site.

(2) Replace ●● with the control circuit voltage code given in the table below:

	Volts ~	230	240
LC1K	50/60 Hz	P7	U7
	Volts ~	230	230/240
LC1D	50 Hz	P5	U5
	60 Hz	—	U6
	50/60 Hz	P7	U7

For other available voltages between 24 V and 660 V, or a DC control circuit, please contact our Customer Care Center.



Protection using class J fuses (UL certification)

Servo drive	Fuse to be placed upstream (A)	
Reference	Nominal power (kW/hp)	
Single phase 220Vac, 200Vac -15%...240Vac +10%		
LXM18PCU01M2X, LXM18PDU01M2X	0.1/0.13	5
LXM18PCU02M2X, LXM18PDU02M2X	0.2/0.27	20
LXM18PCU04M2X, LXM18PDU04M2X	0.4/0.54	20
LXM18PCU07M2X, LXM18PDU07M2X	0.75/1.01	40
LXM18PCU10M2X, LXM18PDU10M2X	1.0/1.34	40
LXM18PCU15M2X, LXM18PDU15M2X	1.5/2.01	40
Three-phase supply voltage: 220Vac, 200Vac -15%...240Vac +10%		
LXM18PCU20M3X, LXM18PDU20M3X	2.0/2.68	80
LXM18PCU30M3X, LXM18PDU30M3X	3.0/4.02	80


Easy Lexium 18

Easy Lexium 18 servo drives & BCH18 servo motors

BCH18 servo motors, Holding brake controller

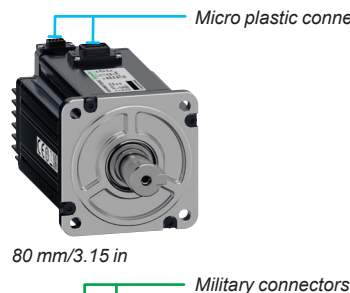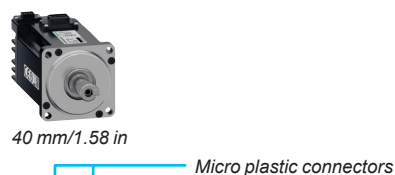

VW3M3103

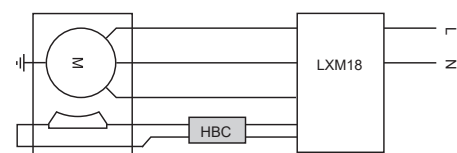

Servo motor with integrated holding brake

BCH18 servo motors

Presentation

BCH18 motors are synchronous AC servo motors,

- Available in several flange sizes and shaft diameters, some with two shaft diameters:
 - 40 mm (1.58 in) – Shaft diameter 8 mm (0.31 in)
 - 60 mm (2.36 in) – Shaft diameter 8 mm (0.31 in) or 14 mm (0.55 in)
 - 80 mm (3.15 in) – Shaft diameter 14 mm (0.55 in) or 19 mm (0.75 in)
 - 100 mm (3.94 in) – Shaft diameter 22 mm (0.87 in)
 - 130 mm (5.12 in) – Shaft diameter 22 mm (0.87 in), 24 mm (0.94 in) or 28 mm (1.102 in)
 - 180 mm (7.09 in) – Shaft diameter 35 mm (1.38 in)
- available with or without holding brake (depending on model)
- available with low or middle motor inertia

Depending on flange size, the BCH18 motors are supplied:

- with micro plastic connectors
- with military connectors

Description

BCH18 servo motors, with a 3-phase stator and a rotor with rare earth permanent magnets, consist of:

- 1 Encoder connector (depending on model)
- 2 Power connector (depending on model)
- 3 Casing with RAL 9005 opaque black paint coating
- 4 A keyed shaft end with oil seal
- 5 4-point axial mounting flange
(flange is mechanically compatible with Asian style servo motors)

Cables and connectors to be ordered separately, for connection to Easy Lexium 18 servo drives.

Schneider Electric has taken particular care over the compatibility of BCH18 servo motors and Easy Lexium 18 servo drives. This compatibility is only possible when using cables and connectors sold by Schneider Electric (see pages 13 to 15).

Holding brake controller (HBC)

BCH18 servo motors can be equipped with an electromagnetic holding brake.

Warning: Do not use the holding brake as a dynamic brake for deceleration, as this will quickly damage the brake.

If a servo motor has a holding brake, it is necessary to provide an appropriate control logic, which releases the brake when power is supplied to the servo motor and immobilizes the servo motor shaft when it is stationary.

The holding brake controller amplifies the braking control signal (Digital output) transmitted by the Easy Lexium 18 servo drive, so that the brake is deactivated quickly. It then reduces this control signal so as to decrease the power dissipated by the holding brake.

References


Designation	Description	Reference	Weight kg lb
Holding brake controller	24 V $\overline{\text{---}}$ power supply Max. power 0.05 kW/0.07 hp IP 20 For mounting on 55 mm/2.17 in $\overline{\text{---}}$ rail	VW3M3103	0.600 1.323

Integrated encoder

BCH18 servo motors are equipped with a 23 bit optic incremental encoder which measures the servo motor speed via associated Easy Lexium 18 servo drive. This information is used by the servo drive's position and speed controller.

BCH18 servo motors										
To order a BCH18 servo motor, make up the reference as follows:										
Brushless servo motor BCH18		•	•	••	•	•	•	•	•	C
Inertia	Low inertia	L								
	Middle inertia	M								
Flange size	40 mm (1.58 in) – Shaft diameter 8 mm (0.31 in)	B								
	60 mm (2.36 in) – Shaft diameter 8 mm (0.31 in) or 14 mm (0.55 in)	D								
	80 mm (3.15 in) – Shaft diameter 14 mm (0.55 in) or 19 mm (0.75 in)	F								
	100 mm (3.94 in) – Shaft diameter 22 mm (0.87 in)	H								
	130 mm (5.12 in) – Shaft diameter 22 mm (0.87 in), 24 mm (0.94 in) or 28 mm (1.102 in)	M								
	180 mm (7.09 in) – Shaft diameter 35 mm (1.38 in)	R								
Nominal power	50 W (0.06 hp)	A5								
	100 W (0.13 hp)	01								
	200 W (0.16 hp)	02								
	400 W (0.53 hp)	04								
	750 W (1.00 hp)	07								
	850 W (1.13 hp)	08								
	1 kW (1.34 hp)	10								
	1.3 kW (1.74 hp)	13								
	1.5 kW (2.01 hp)	15								
	1.8 kW (2.41 hp)	18								
	2.0 kW (2.68 hp)	20								
	2.4 kW (3.22 hp)	24								
	3.0 kW (4.02 hp)	30								
Winding type (Power supply 220 Vac)	Optimized in terms of torque (1000 rpm/1500 rpm)	1								
	Optimized in terms of torque and speed of rotation (2000 rpm)	2								
	Optimized in terms of speed of rotation (3000 rpm)	3								
Shaft end	Parallel keyed shaft (shaft & housing IP 65)	3								
Encoder	23 bit optic incremental encoder	2								
Holding brake	Without holding brake	A								
	With holding brake	F								
Connections	Micro plastic connectors	5								
	Military connectors	6								
Mechanical interface	Motor compatible with Asian style mounting standards	C								

BCH18 servo motors




Dimensions (overall)												Weight	
Servo motor	Continuous power		Equipment	Ø (shaft)		a (flange)		H (height)		D (depth)			
	kW	hp		mm	in	mm	in	mm	in	mm	in		
BCH18LBA5332A5C	0.05	0.06	Without brake	8	0.31	40	1.57	50.75	2.00	74.90	2.95	0.35	0.77
BCH18LBA5332F5C	0.05	0.06	With brake	8	0.31	40	1.57	50.75	2.00	118.90	4.68	0.60	1.32
BCH18MBA5332A5C	0.05	0.06	Without brake	8	0.31	40	1.57	50.75	2.00	75.20	2.96	0.26	0.57
BCH18MBA5332F5C	0.05	0.06	With brake	8	0.31	40	1.57	50.75	2.00	118.90	4.68	0.52	0.57
BCH18LB01332A5C	0.1	0.13	Without brake	8	0.31	40	1.57	50.75	2.00	83.80	3.30	0.41	0.90
BCH18LB01332F5C	0.1	0.13	With brake	8	0.31	40	1.57	50.75	2.00	127.80	5.03	0.65	1.43
BCH18MB01332A5C	0.1	0.13	Without brake	8	0.31	40	1.57	50.75	2.00	89.10	3.51	0.40	0.88
BCH18MB01332F5C	0.1	0.13	With brake	8	0.31	40	1.57	50.75	2.00	132.80	5.23	0.69	1.52
BCH18MD01332A5C	0.1	0.13	Without brake	8	0.31	60	2.36	68.60	2.70	69.20	2.72	0.65	1.43
BCH18MD01332F5C	0.1	0.13	With brake	8	0.31	60	2.36	68.60	2.70	108.70	4.28	1.05	2.31
BCH18LD02332A5C	0.2	0.16	Without brake	14	0.55	60	2.36	68.60	2.70	76.70	3.02	0.85	1.87
BCH18LD02332F5C	0.2	0.16	With brake	14	0.55	60	2.36	68.60	2.70	116.20	4.57	1.20	2.65
BCH18MD02332A5C	0.2	0.16	Without brake	14	0.55	60	2.36	68.60	2.70	77.90	3.07	0.85	1.87
BCH18MD02332F5C	0.2	0.16	With brake	14	0.55	60	2.36	68.60	2.70	117.40	4.62	1.25	2.76
BCH18MF02332A5C	0.2	0.16	Without brake	14	0.55	80	3.15	88.60	3.49	80.20	3.16	1.35	2.98
BCH18MF02332F5C	0.2	0.16	With brake	14	0.55	80	3.15	88.60	3.49	119.00	4.69	2.10	4.63
BCH18LD04332A5C	0.4	0.53	Without brake	14	0.55	60	2.36	68.60	2.70	92.80	3.65	1.15	2.54
BCH18LD04332F5C	0.4	0.53	With brake	14	0.55	60	2.36	68.60	2.70	132.30	5.21	1.55	3.42
BCH18MD04332A5C	0.4	0.53	Without brake	14	0.55	60	2.36	68.60	2.70	96.10	3.78	1.15	2.54
BCH18MD04332F5C	0.4	0.53	With brake	14	0.55	60	2.36	68.60	2.70	135.60	5.34	1.60	3.53
BCH18MF04332A5C	0.4	0.53	Without brake	14	0.55	80	3.15	88.60	3.49	98.00	3.86	1.95	4.30
BCH18MF04332F5C	0.4	0.53	With brake	14	0.55	80	3.15	88.60	3.49	136.80	5.39	2.70	5.95
BCH18LF07332A5C	0.75	1.00	Without brake	19	0.75	80	3.15	88.60	3.49	105.30	4.15	2.30	5.07
BCH18LF07332F5C	0.75	1.00	With brake	19	0.75	80	3.15	88.60	3.49	144.10	5.67	3.10	6.83
BCH18MF07332A5C	0.75	1.00	Without brake	19	0.75	80	3.15	88.60	3.49	113.70	4.48	2.50	5.51
BCH18MF07332F5C	0.75	1.00	With brake	19	0.75	80	3.15	88.60	3.49	152.50	6.00	3.25	7.17
BCH18MM08132A6C	0.85	1.13	Without brake	22	0.87	130	5.12	182.40	7.18	145.50	5.73	6.85	15.10
BCH18MM08132F6C	0.85	1.13	With brake	22	0.87	130	5.12	182.00	7.17	188.50	7.42	8.35	18.41
BCH18LH10332A6C	1	1.34	Without brake	22	0.87	100	3.94	152.20	5.99	140.00	5.51	3.60	7.94
BCH18LH10332F6C	1	1.34	With brake	22	0.87	100	3.94	152.20	5.99	180.50	7.11	4.50	9.92
BCH18LF10332A5C	1	1.34	Without brake	19	0.75	80	3.15	88.60	3.49	118.50	4.67	2.80	6.17
BCH18LF10332F5C	1	1.34	With brake	19	0.75	80	3.15	88.60	3.49	157.30	6.19	3.55	7.83
BCH18MF10332A5C	1	1.34	Without brake	19	0.75	80	3.15	88.60	3.49	128.70	5.07	3.00	6.61
BCH18MF10332F5C	1	1.34	With brake	19	0.75	80	3.15	88.60	3.49	167.50	6.59	3.75	8.27
BCH18MM13132A6C	1.3	1.74	Without brake	22	0.87	130	5.12	182.40	7.18	170.90	6.73	9.00	19.84
BCH18MM13132F6C	1.3	1.74	With brake	22	0.87	130	5.12	182.00	7.17	213.50	8.41	10.60	23.37
BCH18LH15332A6C	1.5	2.01	Without brake	22	0.87	100	3.94	152.20	5.99	159.00	6.26	4.50	9.92
BCH18LH15332F6C	1.5	2.01	With brake	22	0.87	100	3.94	152.20	5.99	199.50	7.85	5.40	11.90
BCH18MM18132A6C	1.8	2.41	Without brake	24	0.94	130	5.12	182.40	7.18	195.90	7.71	11.20	24.69
BCH18MM18132F6C	1.8	2.41	With brake	24	0.94	130	5.12	182.40	7.18	238.50	9.39	12.70	28.00
BCH18LH20332A6C	2	2.68	Without brake	22	0.87	100	3.94	152.20	5.99	174.00	6.85	5.30	11.68
BCH18LH20332F6C	2	2.68	With brake	22	0.87	100	3.94	152.20	5.99	214.50	8.44	6.20	13.67
BCH18MR24132A6C	2.4	3.22	Without brake	35	1.38	180	7.09	231.20	9.10	193.00	7.60	18.00	39.68
BCH18MR24132F6C	2.4	3.22	With brake	35	1.38	180	7.09	231.20	9.10	245.20	9.65	22.45	49.49
BCH18LM30332A6C	3	4.02	Without brake	28	1.10	130	5.12	182.40	7.18	208.90	8.22	10.30	22.71
BCH18LM30332F6C	3	4.02	With brake	28	1.10	130	5.12	182.40	7.18	251.50	9.90	11.80	26.01

Easy Lexium 18

Easy Lexium 18 servo drives & BCH18 servo motors


Connection components for BCH18 servo motors



VW3M5B00R00

Unshielded Power cables

Designation	For use		For cable cross-section	Length		Reference	Weight	
	From servo drive	To servo motor		m	ft		kg	lb
Toward load, Plastic connector, size 0 - item 1								
Equipped with one plastic connector Size 0 (Motor end)	LXM18P●U01M2X	BCH18LB●● BCH18MB●●	4G*0.34mm² (22 AWG)	1.5	4.92	VW3M5B01RA5	0.060	0.132
				3	9.84	VW3M5B01R03	0.117	0.257
				5	16.40	VW3M5B01R05	0.193	0.425
				10	32.81	VW3M5B01R10	0.383	0.844
				15	49.21	VW3M5B01R15	0.573	1.263
				20	65.62	VW3M5B01R20	0.763	1.682
				25	82.02	VW3M5B01R25	0.953	2.101
Equipped with one plastic connector size 0, with brake (Motor end)	LXM18P●U01M2X	BCH18LB●● BCH18MB●●	6G*0.34mm² (22 AWG)	1.5	4.92	VW3M5B02RA5	0.078	0.171
				3	9.84	VW3M5B02R03	0.152	0.336
				5	16.40	VW3M5B02R05	0.252	0.555
				10	32.81	VW3M5B02R10	0.501	1.104
				15	49.21	VW3M5B02R15	0.750	1.653
				20	65.62	VW3M5B02R20	0.999	2.202
				25	82.02	VW3M5B02R25	1.248	2.751
Toward back, Plastic connector, Size 0 - item 1								
Equipped with one plastic connector size 0 (Motor end)	LXM18P●U01M2X	BCH18LB●● BCH18MB●●	4G*0.34mm² (22 AWG)	1.5	4.92	VW3M5B03RA5	0.060	0.132
				3	9.84	VW3M5B03R03	0.117	0.257
				5	16.40	VW3M5B03R05	0.193	0.425
				10	32.81	VW3M5B03R10	0.383	0.844
				15	49.21	VW3M5B03R15	0.573	1.263
				20	65.62	VW3M5B03R20	0.763	1.682
				25	82.02	VW3M5B03R25	0.953	2.101
Equipped with one plastic connector size 0, with brake (Motor end)	LXM18P●U01M2X	BCH18LB●● BCH18MB●●	6G*0.34mm² (22 AWG)	1.5	4.92	VW3M5B04RA5	0.078	0.171
				3	9.84	VW3M5B04R03	0.152	0.336
				5	16.40	VW3M5B04R05	0.252	0.555
				10	32.81	VW3M5B04R10	0.501	1.104
				15	49.21	VW3M5B04R15	0.750	1.653
				20	65.62	VW3M5B04R20	0.999	2.202
				25	82.02	VW3M5B04R25	1.248	2.751
Toward load, Plastic connector, Size 1- item 2								
Equipped with one plastic connector size 1 (Motor end)	LXM18P●U01M2X LXM18P●U02M2X LXM18P●U04M2X LXM18P●U07M2X LXM18P●U10M2X	BCH18LD●● BCH18LF●● BCH18MD●● BCH18MF●●	4G*0.75mm² (18 AWG)	1.5	4.92	VW3M5B11RA5	0.097	0.214
				3	9.84	VW3M5B11R03	0.190	0.418
				5	16.40	VW3M5B11R05	0.313	0.690
				10	32.81	VW3M5B11R10	0.622	1.372
				15	49.21	VW3M5B11R15	0.931	2.053
				20	65.62	VW3M5B11R20	1.240	2.734
				25	82.02	VW3M5B11R25	1.549	3.415
Equipped with one plastic connector size 1, with brake (Motor end)	LXM18P●U01M2X LXM18P●U02M2X LXM18P●U04M2X LXM18P●U07M2X LXM18P●U10M2X	BCH18LD●● BCH18LF●● BCH18MD●● BCH18MF●●	4G*0.75mm² (18 AWG) +2*0.2mm² (32 AWG)	1.5	4.92	VW3M5B12RA5	0.110	0.242
				3	9.84	VW3M5B12R03	0.216	0.475
				5	16.40	VW3M5B12R05	0.356	0.786
				10	32.81	VW3M5B12R10	0.708	1.562
				15	49.21	VW3M5B12R15	1.060	2.338
				20	65.62	VW3M5B12R20	1.412	3.114
				25	82.02	VW3M5B12R25	1.764	3.890
Toward back, Plastic connector, Size 1 - item 2								
Equipped with one plastic connector size 1 (Motor end)	LXM18P●U01M2X LXM18P●U02M2X LXM18P●U04M2X LXM18P●U07M2X LXM18P●U10M2X	BCH18LD●● BCH18LF●● BCH18MD●● BCH18MF●●	4G*0.75mm² (18 AWG)	1.5	4.92	VW3M5B13RA5	0.097	0.214
				3	9.84	VW3M5B13R03	0.190	0.418
				5	16.40	VW3M5B13R05	0.313	0.690
				10	32.81	VW3M5B13R10	0.622	1.372
				15	49.21	VW3M5B13R15	0.931	2.053
				20	65.62	VW3M5B13R20	1.240	2.734
				25	82.02	VW3M5B13R25	1.549	3.415
Equipped with one plastic connector size 1, with brake (Motor end)	LXM18P●U01M2X LXM18P●U02M2X LXM18P●U04M2X LXM18P●U07M2X LXM18P●U10M2X	BCH18LD●● BCH18LF●● BCH18MD●● BCH18MF●●	4G*0.75mm² (18 AWG) +2*0.2mm² (32 AWG)	1.5	4.92	VW3M5B14RA5	0.110	0.242
				3	9.84	VW3M5B14R03	0.216	0.475
				5	16.40	VW3M5B14R05	0.356	0.786
				10	32.81	VW3M5B14R10	0.708	1.562
				15	49.21	VW3M5B14R15	1.060	2.338
				20	65.62	VW3M5B14R20	1.412	3.114
				25	82.02	VW3M5B14R25	1.764	3.890




VW3M5B10R00

Easy Lexium 18

Easy Lexium 18 servo drives & BCH18 servo motors

Connection components for BCH18 servo motors




VW3M5B2●R●●

Unshielded Power cables

Designation	For use		For cable cross-section	Length		Reference	Weight	
	From servo drive	To servo motor		m	ft		kg	lb
Military connector, Size 1 - item 3								
Equipped with one military connector size 1 (Motor end), and free wires (servo drive side)	LXM18P●U10M2X	BCH18LH103●●	4G*1.5mm² (16 AWG)	1.5	4.92	VW3M5B21RA5	0.291	0.643
	LXM18P●U15M2X	BCH18LH153●●		3	9.84	VW3M5B21R03	0.482	1.062
		BCH18MM081●●		5	16.40	VW3M5B21R05	0.735	1.621
		BCH18MM131●●		10	32.81	VW3M5B21R10	1.369	3.019
				15	49.21	VW3M5B21R15	2.003	4.416
				20	65.62	VW3M5B21R20	2.637	5.814
				25	82.02	VW3M5B21R25	3.271	7.212

Equipped with one military connector size 1, with brake (Motor end) and free wires (servo drive side)	LXM18P●U01M2X	BCH18LH103●●	4G*1.5mm ² (16 AWG)	1.5	4.92	VW3M5B22RA5	0.329	0.725
	LXM18P●U02M2X	BCH18LH153●●		3	9.84	VW3M5B22R03	0.556	1.226
	LXM18P●U04M2X	BCH18MM081●●		5	16.40	VW3M5B22R05	0.859	1.895
	LXM18P●U07M2X	BCH18MM131●●		10	32.81	VW3M5B22R10	1.617	3.566
	LXM18P●U10M2X			15	49.21	VW3M5B22R15	2.375	5.237
				20	65.62	VW3M5B22R20	3.133	6.908
				25	82.02	VW3M5B22R25	3.891	8.579



VW3M5B3●R●●

VW3M5B4●R●●

Military connector, Size 2 - item 4

Equipped with one military connector size 2 (Motor end) and free wires (servo drive side)	LXM18P●U20M2X	BCH18LH203●●	4G*2.5mm ² (14 AWG)	1.5	4.92	VW3M5B31RA5	0.395	0.871
	LXM18P●U30M2X	BCH18LM303●●		3	9.84	VW3M5B31R03	0.687	1.514
	LXM18P●U20M3X	BCH18MM181●●		5	16.40	VW3M5B31R05	1.076	2.372
	LXM18P●U30M3X			10	32.81	VW3M5B31R10	2.049	4.518
				15	49.21	VW3M5B31R15	3.022	6.663
				20	65.62	VW3M5B31R20	3.995	8.808
				25	82.02	VW3M5B31R25	4.968	10.953
Equipped with one military connector size 2, with brake (Motor end) and free wires (servo drive side)	LXM18P●U20M2X	BCH18LH203●●	4G*2.5mm ² (14 AWG) + 2*0.5mm ² (20 AWG)	1.5	4.92	VW3M5B32RA5	0.433	0.955
	LXM18P●U30M2X	BCH18LM303●●		3	9.84	VW3M5B32R03	0.763	1.681
	LXM18P●U20M3X	BCH18MM181●●		5	16.40	VW3M5B32R05	1.202	2.651
	LXM18P●U30M3X			10	32.81	VW3M5B32R10	2.301	5.073
				15	49.21	VW3M5B32R15	3.400	7.496
				20	65.62	VW3M5B32R20	4.499	9.919
				25	82.02	VW3M5B32R25	5.598	12.342

Military connector, Size 3 - item 4

Equipped with one military connector size 3 (Motor end) and free wires (servo drive side)	LXM18P●U30M2X	BCH18MR241●●	4G*2.5mm ² (14 AWG)	1.5	4.92	VW3M5B41RA5	0.443	0.977
	LXM18P●U30M3X			3	9.84	VW3M5B41R03	0.735	1.620
				5	16.40	VW3M5B41R05	1.124	2.478
				10	32.81	VW3M5B41R10	2.097	4.623
				15	49.21	VW3M5B41R15	3.070	6.768
				20	65.62	VW3M5B41R20	4.043	8.913
				25	82.02	VW3M5B41R25	5.016	11.058
Equipped with one military connector size 3, with brake (Motor end) and free wires (servo drive side)	LXM18P●U30M2X	BCH18MR241●●	4G*2.5mm ² (14 AWG) + 2*0.5mm ² (20 AWG)	1.5	4.92	VW3M5B42RA5	0.481	1.060
	LXM18P●U30M3X			3	9.84	VW3M5B42R03	0.811	1.787
				5	16.40	VW3M5B42R05	1.250	2.756
				10	32.81	VW3M5B42R10	2.349	5.179
				15	49.21	VW3M5B42R15	3.448	7.602
				20	65.62	VW3M5B42R20	4.547	10.025
				25	82.02	VW3M5B42R25	5.646	12.448

Motor power connector kits

Designation	Description	Reference	Weight	
			kg	lb
Motor power connector kits	Motor power connector kit, plastic size 0	VW3M5B10	0.005	0.011
	Motor power connector kit, toward load, plastic size 1	VW3M5B11	0.007	0.015
	Motor power connector kit, toward back, plastic size 1	VW3M5B12	0.007	0.015
	Motor power connector kit, military size 1	VW3M5B21	0.100	0.220
	Motor power connector kit, military size 2	VW3M5B22	0.155	0.342



VW3M5B10

VW3M5B11



VW3M5B12




VW3M5B21

VW3M5B22


Easy Lexium 18

Easy Lexium 18 servo drives & BCH18 servo motors


Connection components for BCH18 servo motors



VW3M8B11R●●



VW3M8B13R●●



VW3M8B21R●●



VW3M8B11



VW3M8B21

Shielded Encoder cables

Designation	For use		For cable cross-section	Length		Reference	Weight	
	From servo drive	To servo motor		m	ft		kg	lb
Toward load, Plastic connector - item 5								
Equipped with one plastic connector (Motor end) and Sunchu 6-pin connector (servo drive side)	LXM18P●U01M2X	40/60/80 mm flange	2*0.5mm² (20 AWG) +	1.5	4.92	VW3M8B11RA5	0.105	0.232
	LXM18P●U02M2X	(1.58/ 2.36/	2*0.25 mm²	3	9.84	VW3M8B11R03	0.200	0.440
	LXM18P●U04M2X	3.15 in flange)	(24 AWG)	5	16.40	VW3M8B11R05	0.325	0.717
	LXM18P●U07M2X			10	32.81	VW3M8B11R10	0.639	1.409
	LXM18P●U10M2X			15	49.21	VW3M8B11R15	0.953	2.101
				20	65.62	VW3M8B11R20	1.267	2.794
				25	82.02	VW3M8B11R25	1.581	3.486

Toward back, Plastic connector - item 6

Equipped with one plastic connector (Motor end) and Sunchu 6-pin connector (servo drive side)	LXM18P●U01M2X	40/60/80 mm flange	2*0.5mm ² (20 AWG) +	1.5	4.92	VW3M8B13RA5	0.105	0.232
	LXM18P●U02M2X	(1.58/ 2.36/	2*0.25 mm ²	3	9.84	VW3M8B13R03	0.200	0.440
	LXM18P●U04M2X	3.15 in flange)	(24 AWG)	5	16.40	VW3M8B13R05	0.325	0.717
	LXM18P●U07M2X			10	32.81	VW3M8B13R10	0.639	1.409
	LXM18P●U10M2X			15	49.21	VW3M8B13R15	0.953	2.101
				20	65.62	VW3M8B13R20	1.267	2.794
				25	82.02	VW3M8B13R25	1.581	3.486

Military connector - item 7

Equipped with one military connector (Motor end) and Sunchu 6-pin connector (servo drive side)	LXM18P●U10M2X	100/130/180 mm flange	2*0.5mm ² (20 AWG) +	1.5	4.92	VW3M8B21RA5	0.139	0.306
	LXM18P●U15M2X	(3.94/ 5.12/	2*0.25 mm ²	3	9.84	VW3M8B21R03	0.233	0.514
	LXM18P●U20M2X	7.09 in flange)	(24 AWG)	5	16.40	VW3M8B21R05	0.359	0.790
	LXM18P●U30M2X			10	32.81	VW3M8B21R10	0.673	1.483
	LXM18P●U20M3X			15	49.21	VW3M8B21R15	0.987	2.175
	LXM18P●U30M3X			20	65.62	VW3M8B21R20	1.301	2.867
				25	82.02	VW3M8B21R25	1.615	3.559

Motor encoder connector kits

Designation	Description	Reference	Weight	
			kg	lb
Motor encoder connector kits	Plastic	VW3M8B11	0.005	0.011
	Military	VW3M8B21	0.035	0.077

Easy Lexium 18

Easy Lexium 18 servo drives & BCH18 motors

#		BCH18MD01332F5C	4 12	LXM18PCU30M3X	4 5 8 9	VW3M5B02R10	13	VW3M5B13R15	13
490NTC00005	6	BCH18MD02332A5C	4 12			VW3M5B02R15	13	VW3M5B13R20	13
490NTC00005U	6	BCH18MD02332F5C	4 12	LXM18PDU01M2X	4 5 8 9	VW3M5B02R20	13	VW3M5B13R25	13
490NTC00015	6	BCH18MD04332A5C	4 12			VW3M5B02R25	13	VW3M5B13RA5	13
490NTW00002	6	BCH18MD04332F5C	4 12	LXM18PDU02M2X	4 5 8 9	VW3M5B02RA5	13	VW3M5B14R03	13
490NTW00002U	6	BCH18MF02332A5C	4 12			VW3M5B03R03	13	VW3M5B14R05	13
490NTW00005	6	BCH18MF02332F5C	4 12	LXM18PDU04M2X	4 5 8 9	VW3M5B03R05	13	VW3M5B14R10	13
490NTW00005U	6	BCH18MF02332F5C	4 12			VW3M5B03R10	13	VW3M5B14R15	13
490NTW00012	6	BCH18MF04332A5C	4 12	LXM18PDU07M2X	4 5 8 9	VW3M5B03R15	13	VW3M5B14R20	13
490NTW00012U	6	BCH18MF04332F5C	4 12			VW3M5B03R20	13	VW3M5B14R25	13
B		BCH18MF07332A5C	4 12	LXM18PDU10M2X	4 5 8 9	VW3M5B03R25	13	VW3M5B14RA5	13
BCH18LB01332A5C	4 12	BCH18MF07332F5C	4 12			VW3M5B03RA5	13	VW3M5B21	14
BCH18LB01332F5C	4 12	BCH18MF10332A5C	4 12	LXM18PDU15M2X	4 5 8 9	VW3M5B04R03	13	VW3M5B21R03	14
BCH18LBA5332A5C	4 12	BCH18MF10332F5C	4 12			VW3M5B04R05	13	VW3M5B21R05	14
BCH18LBA5332F5C	4 12	BCH18MM08132A6C	4 12	LXM18PDU20M3X	4 5 8 9	VW3M5B04R10	13	VW3M5B21R10	14
BCH18LD02332A5C	4 12	BCH18MM08132F6C	4 12			VW3M5B04R15	13	VW3M5B21R15	14
BCH18LD02332F5C	4 12	BCH18MM13132A6C	4 12	LXM18PDU30M3X	4 5 8 9	VW3M5B04R20	13	VW3M5B21R20	14
BCH18LD04332A5C	4 12	BCH18MM13132F6C	4 12			VW3M5B04R25	13	VW3M5B21R25	14
BCH18LD04332F5C	4 12	BCH18MM18132A6C	4 12	V		VW3M5B04RA5	13	VW3M5B21RA5	14
BCH18LF07332A5C	4 12	BCH18MM18132F6C	4 12	VW3A4420	8	VW3M5B10	14	VW3M5B22	14
BCH18LF07332F5C	4 12	BCH18MR24132A6C	4 12	VW3A4421	8	VW3M5B11	14	VW3M5B22R03	14
BCH18LF10332A5C	4 12	BCH18MR24132F6C	4 12	VW3A4423	8	VW3M5B11R03	13	VW3M5B22R05	14
BCH18LF10332F5C	4 12	L		VW3A7603R07	7	VW3M5B11R05	13	VW3M5B22R10	14
BCH18LH10332A6C	4 12	LXM18PCU01M2X	4 5 8 9	VW3A7607R30	7	VW3M5B11R10	13	VW3M5B22R15	14
BCH18LH10332F6C	4 12			VW3A7733	7	VW3M5B11R15	13	VW3M5B22R20	14
BCH18LH15332A6C	4 12	LXM18PCU02M2X	4 5 8 9	VW3M3103	10	VW3M5B11R20	13	VW3M5B22R25	14
BCH18LH15332F6C	4 12			VW3M4B01	6	VW3M5B11R25	13	VW3M5B22RA5	14
BCH18LH20332A6C	4 12	LXM18PCU04M2X	4 5 8 9	VW3M4B11	6	VW3M5B11RA5	13	VW3M5B31R03	14
BCH18LH20332F6C	4 12			VW3M4B21	6	VW3M5B12	14	VW3M5B31R05	14
BCH18LM30332A6C	4 12	LXM18PCU07M2X	4 5 8 9	VW3M5B01R03	13	VW3M5B12R03	13	VW3M5B31R10	14
BCH18LM30332F6C	4 12			VW3M5B01R05	13	VW3M5B12R05	13	VW3M5B31R15	14
BCH18MB01332A5C	4 12	LXM18PCU10M2X	4 5 8 9	VW3M5B01R10	13	VW3M5B12R10	13	VW3M5B31R20	14
BCH18MB01332F5C	4 12			VW3M5B01R15	13	VW3M5B12R15	13	VW3M5B31R25	14
BCH18MBA5332A5C	4 12	LXM18PCU15M2X	4 5 8 9	VW3M5B01R20	13	VW3M5B12R20	13	VW3M5B31RA5	14
BCH18MBA5332F5C	4 12			VW3M5B01R25	13	VW3M5B12R25	13	VW3M5B32R03	14
BCH18MD01332A5C	4 12	LXM18PCU20M3X	4 5 8 9	VW3M5B01R25	13	VW3M5B12RA5	13	VW3M5B32R05	14
				VW3M5B01RA5	13	VW3M5B13R03	13	VW3M5B32R10	14
				VW3M5B02R03	13	VW3M5B13R05	13	VW3M5B32R15	14
				VW3M5B02R05	13	VW3M5B13R10	13	VW3M5B32R20	14

VW3M5B32R25	14
VW3M5B32RA5	14
VW3M5B41R03	14
VW3M5B41R05	14
VW3M5B41R10	14
VW3M5B41R15	14
VW3M5B41R20	14
VW3M5B41R25	14
VW3M5B41RA5	14
VW3M5B42R03	14
VW3M5B42R05	14
VW3M5B42R10	14
VW3M5B42R15	14
VW3M5B42R20	14
VW3M5B42R25	14
VW3M5B42RA5	14
VW3M8B11	15
VW3M8B11R03	15
VW3M8B11R05	15
VW3M8B11R10	15
VW3M8B11R15	15
VW3M8B11R20	15
VW3M8B11R25	15
VW3M8B11RA5	15
VW3M8B13R03	15
VW3M8B13R05	15
VW3M8B13R10	15
VW3M8B13R15	15
VW3M8B13R20	15
VW3M8B13R25	15
VW3M8B13RA5	15
VW3M8B21	15
VW3M8B21R03	15
VW3M8B21R05	15
VW3M8B21R10	15
VW3M8B21R15	15
VW3M8B21R20	15
VW3M8B21R25	15
VW3M8B21RA5	15

Life Is On



Learn more about our products at
www.se.com

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Design: Schneider Electric
Photos: Schneider Electric

Schneider Electric Industries SAS

Head Office
35, rue Joseph Monier - CS 30323
F-92500 Rueil-Malmaison Cedex
France

DIA7ED2230401EN
July 2023 - V2.0