


czujnik fotoelektryczny
triangulation sensor with analog output
Q50AVUQ


TURCK

Industrial
Automation

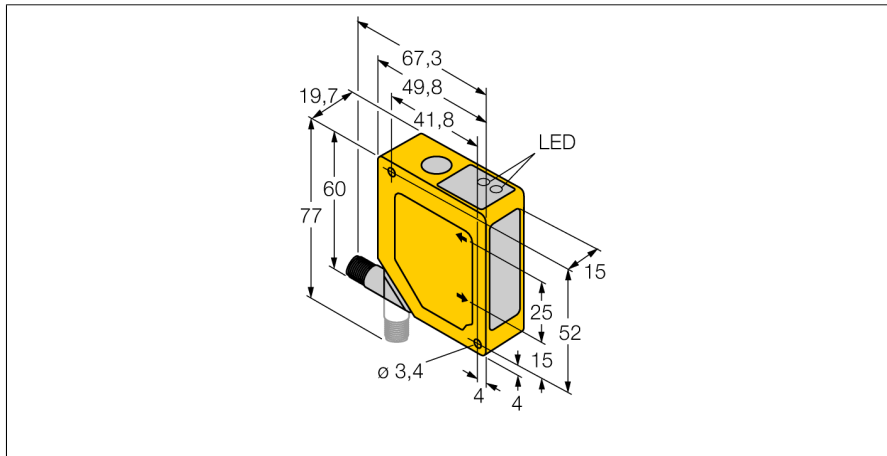


- Foreground and background suppression
- Operating range 50...150 mm
- M12 x 1 connector rotatable by 90 °
- Operating voltage 15...30 VDC
- analog voltage output 0...10 V
- selectable output response of 4 ms (fast) and 64 ms (slow)

Schemat podłączenia

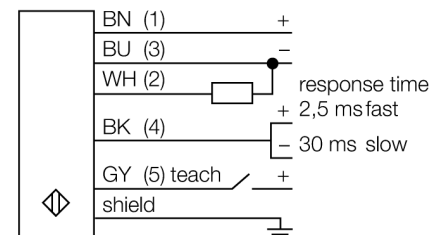

Zasada działania

The function principle of the Q50 is based on optical triangulation. The emitter and the optics create a light source that is directed towards a target. The target reflects the light back to the receiver lens of the sensor, from where it then falls onto the position sensitive device (PSD). The target's distance from the receiver determines the angle at which the light meets the receiver element. The integrated microprocessor uses this angle to analyse the target position and to create a corresponding output signal.

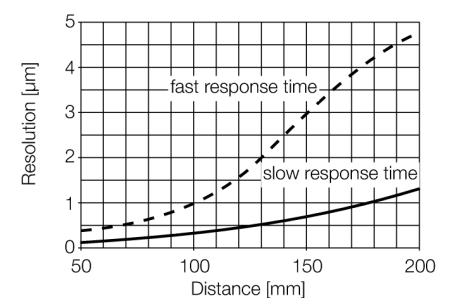

Typ	Q50AVUQ
Nr kat.	3063869
Tryb pracy	Czujnik odbiciowy z ustawianym odcieniem tła i przedpola
Rodzaj światła	czerwony
Długość fali	685 nm
Repeatability	0.5 mm
Zasięg	50...150 mm
Temperatura pracy	-10...+55 °C
Napięcie zasilania	15...30 V DC
Prąd bez obciążenia I ₀	≤ 70 mA
Typ wyjścia analogowego	0...10 V
napięcie wyjściowe	0...10V
Opóźnienie załączenia	≤ 2 s
Wykonanie	Prostopadłościenny, Q50
Wymiary	49.8 mm x 19.7 mm x 60 mm
Materiał obudowy	Tworzywo sztuczne, ABS
Soczewka	tworzywo sztuczne, acrylic
Połączenie elektryczne	Złącze
Klasa ochrony	IP67
Cechy specjalne	Analogowe