



LM-4UAS

Uniwers. wejście. 4x, szafa ster.

Nr art. 22154732

Switching/dimming input with 4 independent inputs for scene recall and dimming with conventional momentary action switches

Zastosowanie

The LM-4UAS universal input can be used to integrate motion sensors, time switches, momentary-action or standard switches in a Zumtobel LUXMATE installation for running scenes, dimming etc.

The LM-4UAS has 4 independent inputs S1 - S4, each of which can be assigned a dedicated address. It is defined at the addressing stage whether the relevant input controls a group of outputs or all the outputs in a room.

Wskazówki dotyczące planowania

An authorised Zumtobel service engineer can create the functions of the LM-SWE, LM-SCE, LM-SDE, LM-SJE, LM-SSE(V), LM-SME and LM-4AWS from the LM-4UAS for each channel.

When delivered, the LM-4UAS corresponds to an LM-SDE.


The LM-4UAS is available as a factory pre-configured model:
LM-4UAS(V): part no. 22154731



Opis działania

Depending on the addressing of an input, users can control all the luminaires in a room jointly, or one luminaire group. Briefly pressing one of the momentary-action switches connected to the four inputs toggles between the scenes e.g. "absent" (scene 0) and "absent" (scene 1); holding down the switch alternately raises or lowers the dimming level for the entire lighting or one luminaire group in a room.


Schemat połączeń

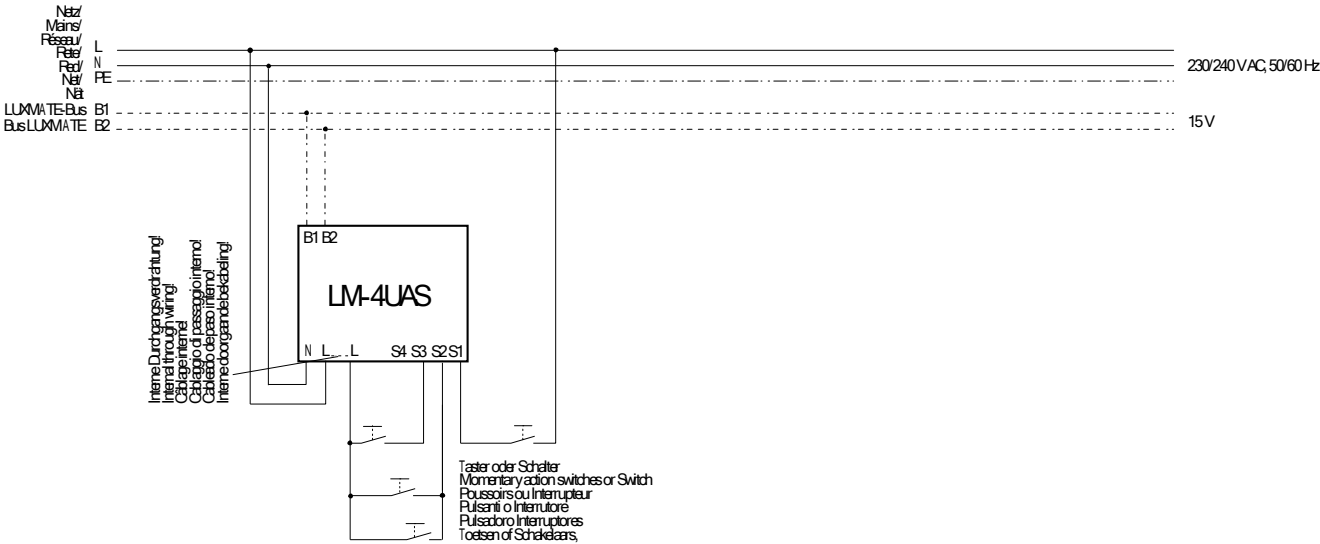


Wskazówki dotyczące montażu i instalacji

- Installation in switch cabinets on 35 mm top-hat rail complying with EN 50022.
- Two twisted or stranded non-shielded conductors (2 x 0,75mm²) are used for the bus line; the polarities of the two bus lines may be reversed.
- The mains is connected to terminals L and N unswitched.
- All connected inputs must have identical phases.

Rozmiar



Tabliczka znamionowa/podłączenia



Dane techniczne

Napięcie znamionowe	230/240 V AC, 50/60 Hz
Dopuszczalne napięcie wejściowe	207 - 264 V AC, 50 - 60 Hz
Strata mocy	< 2 W
Wejścia	Magistrala LUXMATE, 4 jednopinowe wejścia
Adresowanie	1 adres na wejście:
Tryb pracy	WSPÓLNY (wszystko) przy krótkim naciśnięciu przycisku INTENS (jaskrawość) przy długim naciśnięciu przycisku
Terminale	0,75 ... 2,5 mm ²
Instalacja	Na szynie DIN typu O o szerokości 35 mm, zgodnej z EN 50022
Wymiary	4 jednostek dla 17,5mm
Materiał obudowy	poliwęglan, bez halogenów, ognioodporny
Dopuszczalna temperatura otoczenia Ta	0 °C ... + 50 °C
Weight	Ok. 0.26 kg
{failed}	IP20
{failed}	Przyciski chwilowe ze standardowego asortymentu na 230 V