

ED-CCB 01/02/03 b+c

Urządzenie obsługowe wielokątne antracyt

Nr art. 22161828

Control point for running 3 scenes and controlling the lighting level; anthracite finish and printed with "1", "2", "3" plus "luminaire group 1" and "luminaire group 2" pictograms

Zastosowanie

The Circle control point can be used to recall three scenes for different room uses and activities via its 3 scene keys arranged in a circular layout. A green illuminated circle segment indicates the active scene.

The central On/Off button is used when entering or leaving the room. This button is illuminated by a surrounding red ring when the room is unoccupied, helping orientation on entering the room.

In addition, the user can manually adjust the active scene using two rocker switches for controlling the light level of two luminaire groups.

The Circle control point is a wall-mounted control unit in standard switch size. It is made of plastic in an anthracite satin-matt finish and square-edge design. All buttons are printed with intuitive pictograms. An On/Off symbol is shown on the central switch. The scene keys are printed with "1", "2", "3" and the two rocker switches with "luminaire group 1", "luminaire group 2".


Wskazówki dotyczące planowania

- Power supply via DALI control line
- 3 DALI bus loads
- for DIMLITE: via Control-In line



- The Circle control point is assigned to a specific output group or specific room by custom configuration of the higher-level light management system.

Schemat połączeń

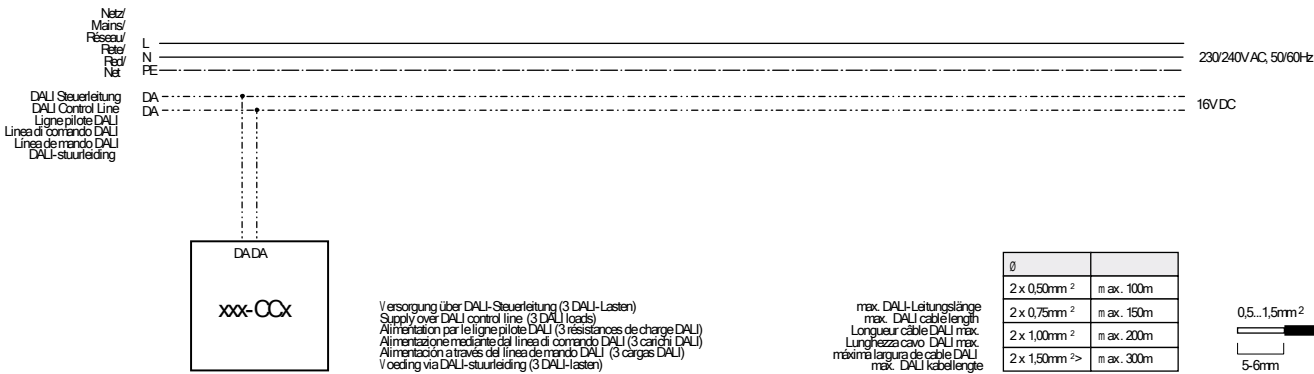

Wskazówki dotyczące montażu i instalacji


- Fit the control point into a standard Eurobox or UK metal backbox (not included):
- the installation box must be fitted so that its fixing screws are horizontal.
 - use a screw / plug-in terminal (included) to connect power-supply and bus lines,
- screw the base of the control point into the installation box

Dane techniczne

Napięcie znamionowe	Napięcie DALI (ok. 16 V DC)
Dopuszczalne napięcie wejściowe	12 - 22,5 V DC
Zasilanie	za pośrednictwem linii sterującej DALI (16 V DC)
{failed}	3 urządzenia DALI (6 mA)
Strata mocy	< 0,1 W
Sygnal DALI	16 V taktowane (kod Manchester)
Obsługa	Przycisk wejścia/wyjścia, 3 przyciski scen, 2 przyciski klawiszowe dla światła
Terminale	0,5-1,5 mm ²
{failed}	IP20
Materiał obudowy	plastik, bez halogenów
Kolor skrzynki	kolor antracytowy (odpowiednik RAL 7021)
Instalacja	w europejskiej puszcze instalacyjnej, pojedynczej, wymiary zgodne z DIN 0606 (średnica 60 mm, głębokość 42 mm) lub brytyjskiej metalowej puszcze połączeniowej
Wymiary	87 x 87 x 13 mm (tylko górna część)
Dopuszczalna temperatura otoczenia Ta	0 °C ... + 50 °C
Weight	Ok. 0.15 kg

- then simply snap the cover onto the control point without using screws
- Use a damp cloth or antistatic wipe to clean the control point

Rozmiar



Tabliczka znamionowa/podłączenia

