

SIPLUS ET200S TERMINATING MODULE -25...+60 DEGREES C
BASED ON 6ES7193-4JA00-0AA0

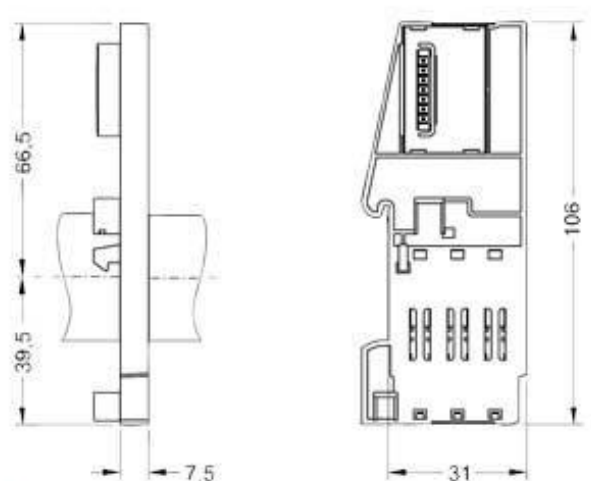


Figure similar

Installation type/mounting	
Wall mounting/direct mounting possible	Yes
Standards, approvals, certificates	
CE mark	Yes
Ambient conditions	
Ambient temperature during operation	
• min.	-25 °C; = Tmin
• max.	60 °C; = Tmax
Extended ambient conditions	
• relative to ambient temperature-atmospheric pressure-installation altitude	Tmin ... Tmax at 1080 hPa ... 795 hPa (-1000 m ... +2000 m) // Tmin ... (Tmax - 10K) at 795 hPa ... 658 hPa (+2000 m ... +3500 m) // Tmin ... (Tmax - 20K) at 658 hPa ... 540 hPa (+3500 m ... +5000 m)
Relative humidity	
— With condensation, tested in accordance with IEC 60068-2-38, max.	100 %; Relative humidity, incl. condensation / frost permitted (no commissioning under condensation conditions)
Resistance	

— against biologically active substances /
conformity with EN 60721-3-3

— against chemically active substances /
conformity with EN 60721-3-3

— against mechanically active substances /
conformity with EN 60721-3-3

Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna). The supplied connector covers must remain on the unused interfaces during operation!

Yes; Class 3C4 incl. salt spray according to EN 60068-2-52 (degree of severity 3). The supplied connector covers must remain on the unused interfaces during operation!

Yes; Class 3S4 incl. sand, dust. The supplied connector covers must remain on the unused interfaces during operation!

Accessories

belongs to product

ET 200S

Dimensions

Width

30 mm

Height

106 mm

Depth

7.5 mm

Weights

Weight, approx.

50 g

last modified:

10/28/2016