



2DI 24VDC LC COM CONTROL MODULE FOR
ET200S HIGH FEATURE STARTER FOR ET 200S
FAILSAFE STARTER FOR LOCAL INPUT
FUNCTIONS OR F. MANUAL OPERATION WITH COM
INTERFACE FOR PC CABLE 6ED1057-1AA00-0BA0

General technical data:		
Product designation		Control module 2DI 24 V DC COM
Product description		digital input module with two inputs for local motor starter functions for front mounting
Protection class IP		IP20
Mounting height	mm	45
Installation width	mm	23.8
Installation depth	mm	23
Type of connectable conductor cross-sections		• solid1x (0.14 ... 2.5 mm²), acc. to IEC 60947 • finely stranded with core end processing2x (0.14 ... 1) • at AWG conductors — solid1x (18 ... 22) — stranded1x (18 ... 22)
Number of digital inputs		2
Ambient temperature		• during storage°C0 ... 60 • during operation°C-40 ... +80

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1903-0CH20>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3RK1903-0CH20>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1903-0CH20&lang=en

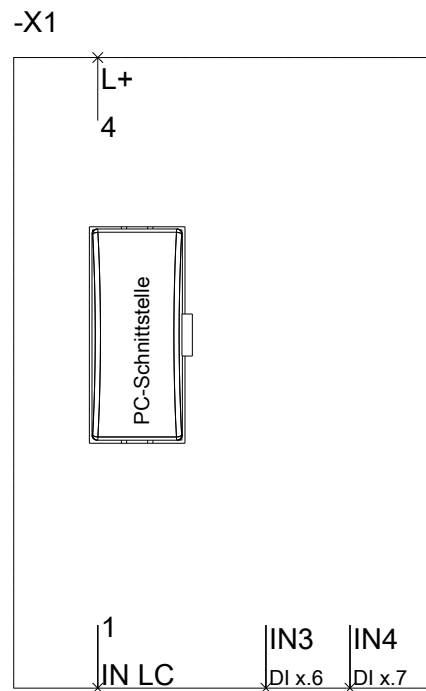

-X1

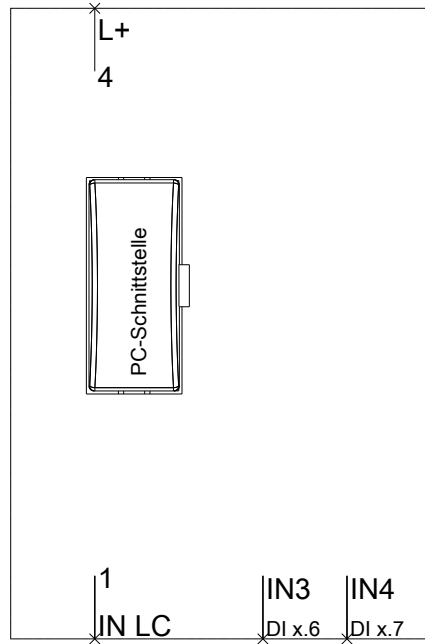

last modified:

10/07/2016