

CONNECTING COMB !!! PHASE-OUT PRODUCT !!! FOR
FURTHER INFORMATION PLEASE CONTACT OUR SALES
STAFF! FOR 3TX7014, 3TX7015 AND 3RS17 WITH 3-WAY
SEPARATION 6.2 MM, 16-POLE, BLUE, CURRENT CARRYING
CAPACITY 6A



General technical data:

Switching behavior	monostable
Operating current of auxiliary contacts	
• at DC-13	
— at 24 V	1 A
— at 110 V	0.2 A
— at 230 V	0.1 A
• at AC-15	
— at 230 V	3 A

Mechanical data:

Type of electrical connection Plug-in socket	No
Design of the relay operating mechanism	poled
Design of the switching function positively driven	No
Product component Plug-in socket	No

Ambient conditions:

Protection class IP	IP00
---------------------	------

Certificates/ approvals:

General Product Approval	Declaration of Conformity	other
--------------------------	------------------------------	-------



[Bestätigungen](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TX7014-7AA00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3TX7014-7AA00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3TX7014-7AA00&lang=en

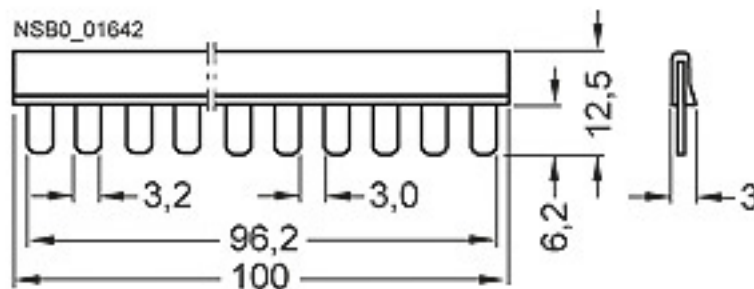

last modified:

10/24/2016