


SIMATIC S7-1200F, CPU 1214 FC, COMPACT CPU, DC/DC/DC,
ONBOARD I/O: 14 DI 24V DC; 10 DO 24 V DC; 2 AI 0 - 10V DC,
POWER SUPPLY: DC 20.4 - 28.8 V DC, PROGRAM/DATA
MEMORY 125 KB

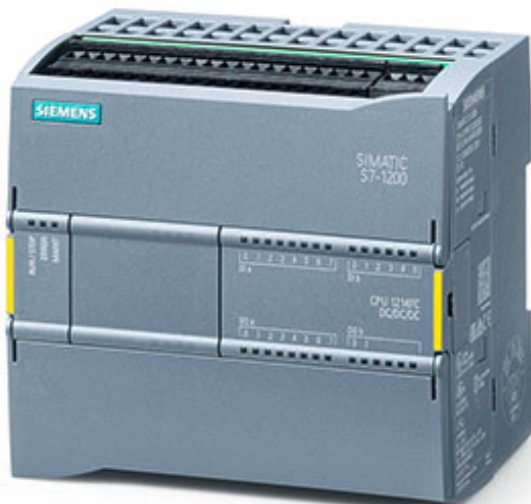

General information	
Product type designation	CPU 1214FC DC/DC
Firmware version	V4.2
Engineering with	
• Programming package	STEP 7 V14 or higher
Display	
with display	No
Supply voltage	
Rated value (DC)	
• 24 V DC	Yes
permissible range, lower limit (DC)	20.4 V
permissible range, upper limit (DC)	28.8 V
Load voltage L+	
• Rated value (DC)	24 V
• permissible range, lower limit (DC)	20.4 V
• permissible range, upper limit (DC)	28.8 V
Input current	

Current consumption, max.	1 500 mA; max. with all expansion accessories
Inrush current, max.	12 A; at 28.8 V DC
I ² t	0.5 A ² ·s
Output current	
for backplane bus (5 V DC), max.	1 600 mA; Max. 5 V DC for SM and CM
Encoder supply	
24 V encoder supply	
• 24 V	L+ minus 4 V DC min.
Power loss	
Power loss, typ.	12 W
Memory	
Work memory	
• integrated	125 kbyte
• expandable	No
Load memory	
• integrated	4 Mbyte
• Plug-in (SIMATIC Memory Card), max.	with SIMATIC memory card
Backup	
• present	Yes
• maintenance-free	Yes
• without battery	Yes
CPU processing times	
for bit operations, typ.	0.085 µs; / instruction
for word operations, typ.	1.7 µs; / instruction
for floating point arithmetic, typ.	2.3 µs; / instruction
CPU-blocks	
Number of blocks (total)	DBs, FCs, FBs, counters and timers. The maximum number of addressable blocks ranges from 1 to 65535. There is no restriction, the entire working memory can be used
OB	
• Number, max.	Limited only by RAM for code
Data areas and their retentivity	
retentive data area in total (incl. times, counters, flags), max.	10 kbyte
Flag	
• Number, max.	8 kbyte; Size of bit memory address area
Local data	
• per priority class, max.	16 kbyte; Priority class 1 (program cycle): 16 KB, priority class 2 to 26: 6 KB
Address area	

I/O address area	
• Inputs	1 024 byte
• Outputs	1 024 byte
Process image	
• Inputs, adjustable	1 kbyte
• Outputs, adjustable	1 kbyte
Hardware configuration	
Number of modules per system, max.	3 comm. modules, 1 signal board, 8 signal modules
Time of day	
Clock	
• Hardware clock (real-time)	Yes
• Backup time	480 h; typical; 12 days min. at 40 °C
• Deviation per day, max.	±60 s per month
Digital inputs	
Number of digital inputs	14
• of which inputs usable for technological functions	6; HSC (High Speed Counting)
integrated channels (DI)	14
Source/sink input	Yes
Number of simultaneously controllable inputs	
all mounting positions	
— up to 40 °C, max.	14; 14 inputs at 55 °C horizontal or 45 °C vertical
Input voltage	
• Rated value (DC)	24 V; DC at 4 mA nominal
• for signal "0"	5 V DC at 1 mA
• for signal "1"	15 V DC at 2.5 mA
Input current	
• for signal "1", typ.	4 mA; nominal
Input delay (for rated value of input voltage)	
for standard inputs	
— parameterizable	0.1 / 0.2 / 0.4 / 0.8 / 1.6 / 3.2 / 6.4 / 10.0 / 12.8 / 20.0 µs; 0.05 / 0.1 / 0.2 / 0.4 / 0.8 / 1.6 / 3.2 / 6.4 / 10.0 / 12.8 / 20.0 ms
— at "0" to "1", min.	0.1 µs
— at "0" to "1", max.	20 ms
for interrupt inputs	
— parameterizable	Yes
for counter/technological functions	
— parameterizable	Yes; Single phase: 3 @ 100 kHz & 3 @ 30 kHz, differential: 3 @ 80 kHz & 3 @ 30 kHz
Cable length	
• shielded, max.	500 m; 50 m for technological functions

- unshielded, max.

150 m; For technological functions: No

Digital outputs

Number of digital outputs	10
• of which high-speed outputs	4; 100 kHz Pulse Train Output
integrated channels (DO)	10
Short-circuit protection	No; to be provided externally
Switching capacity of the outputs	
• with resistive load, max.	0.5 A
• on lamp load, max.	5 W
Output voltage	
• for signal "0", max.	0.1 V; with 10 kOhm load
• for signal "1", min.	20 V
Output current	
• for signal "1" rated value	0.5 A
• for signal "0" residual current, max.	0.1 mA
Output delay with resistive load	
• "0" to "1", max.	1 µs
• "1" to "0", max.	3 µs
Switching frequency	
• of the pulse outputs, with resistive load, max.	100 kHz
Cable length	
• shielded, max.	500 m
• unshielded, max.	150 m

Analog inputs

Number of analog inputs	2
integrated channels (AI)	2; 0 to 10V
Input ranges	
• Voltage	Yes
Input ranges (rated values), voltages	
• 0 to +10 V	Yes
• Input resistance (0 to 10 V)	≥100k ohms
Cable length	
• shielded, max.	100 m; twisted and shielded

Analog outputs

Output ranges, current	
• 0 to 20 mA	Yes

Analog value generation

Integration and conversion time/resolution per channel	
• Resolution with overrange (bit including sign), max.	10 bit
• Integration time, parameterizable	Yes

• Conversion time (per channel)	625 µs
Encoder	
Connectable encoders	
• 2-wire sensor	Yes
1. Interface	
Interface type	PROFINET
Physics	Ethernet
Isolated	Yes
automatic detection of transmission rate	Yes
Autonegotiation	Yes
Autocrossing	Yes
Interface types	
• Number of ports	2
• integrated switch	Yes
Functionality	
• PROFINET IO Controller	Yes
• PROFINET IO Device	Yes
• SIMATIC communication	Yes
• Open IE communication	Yes
• Web server	Yes
• Media redundancy	Yes; as MRP client
PROFINET IO Controller	
• Transmission rate, max.	100 Mbit/s
Services	
— PG/OP communication	Yes
— S7 routing	Yes
— Isochronous mode	No
— Open IE communication	Yes
— IRT	No
— MRP	Yes; as MRP client
— MRPD	No
— PROFINergy	No
— Prioritized startup	Yes
— Number of IO devices with prioritized startup, max.	16
— Number of connectable IO Devices, max.	16
— Number of connectable IO Devices for RT, max.	16
— of which in line, max.	16
— Activation/deactivation of IO Devices	Yes

- Number of IO Devices that can be simultaneously activated/deactivated, max.
- Updating time

8

The minimum value of the update time also depends on the communication component set for PROFINET IO, on the number of IO devices and the quantity of configured user data.

PROFINET IO Device

Services

- PG/OP communication Yes
- S7 routing Yes
- Isochronous mode No
- Open IE communication Yes
- IRT No
- MRP Yes; as MRP client
- MRPD No
- PROFINergy Yes
- Shared device Yes
- Number of IO Controllers with shared device, max. 2

Protocols

- Supports protocol for PROFINET IO Yes
- MRP Yes
- PROFIBUS Yes; CM 1243-5 required
- AS-Interface Yes; CM 1243-2 required

Protocols (Ethernet)

- TCP/IP Yes
- DHCP No
- SNMP Yes
- DCP Yes
- LLDP Yes

Further protocols

- MODBUS Yes

Communication functions

S7 communication

- supported Yes
- as server Yes
- as client Yes
- User data per job, max. See online help (S7 communication, user data size)

Open IE communication

- TCP/IP Yes
 - Data length, max. 8 kbyte
- ISO-on-TCP (RFC1006) Yes
 - Data length, max. 8 kbyte

• UDP	Yes
— Data length, max.	1 472 byte
Web server	
• supported	Yes
• User-defined websites	Yes
Number of connections	
• overall	16; dynamically
Test commissioning functions	
Status/control	
• Status/control variable	Yes
• Variables	Inputs/outputs, memory bits, DBs, distributed I/Os, timers, counters
Forcing	
• Forcing	Yes
Diagnostic buffer	
• present	Yes
Traces	
• Number of configurable Traces	2
• Memory size per trace, max.	512 kbyte
Integrated Functions	
Number of counters	6
Counting frequency (counter) max.	100 kHz
Frequency meter	Yes
controlled positioning	Yes
Number of position-controlled positioning axes, max.	8
Number of positioning axes via pulse-direction interface	Up to 4 with SB 1222
PID controller	Yes
Number of alarm inputs	4
Potential separation	
Potential separation digital inputs	
• Potential separation digital inputs	Functional isolation (Optocoupler)
EMC	
Interference immunity against discharge of static electricity	
• Interference immunity against discharge of static electricity acc. to IEC 61000-4-2	Yes
— Test voltage at air discharge	8 kV
— Test voltage at contact discharge	6 kV
Interference immunity to cable-borne interference	
• Interference immunity on supply lines acc. to IEC 61000-4-4	Yes

• Interference immunity on signal cables acc. to IEC 61000-4-4	Yes
Interference immunity against voltage surge	
• on the supply lines acc. to IEC 61000-4-5	Yes
Interference immunity against conducted variable disturbance induced by high-frequency fields	
• Interference immunity against high-frequency radiation acc. to IEC 61000-4-6	Yes
Emission of radio interference acc. to EN 55 011	
• Limit class A, for use in industrial areas	Yes; Group 1
• Limit class B, for use in residential areas	Yes; When appropriate measures are used to ensure compliance with the limits for Class B according to EN 55011
Degree and class of protection	
Degree of protection acc. to EN 60529	
• IP20	Yes
Standards, approvals, certificates	
CE mark	Yes
UL approval	Yes
cULus	Yes
FM approval	Yes
RCM (formerly C-TICK)	Yes
KC approval	Yes
Marine approval	
• Marine approval	Yes
Highest safety class achievable in safety mode	
• Performance level according to ISO 13849-1	PLe
• SIL acc. to IEC 61508	SIL 3
Ambient conditions	
Free fall	
• Fall height, max.	0.3 m; five times, in product package
Ambient temperature during operation	
• min.	-20 °C
• max.	60 °C; Number of simultaneously activated inputs or outputs 7 or 5 (no adjacent points) at 60 °C horizontal or 50 °C vertical, 14 or 10 at 55 °C horizontal or 45 °C vertical
• horizontal installation, min.	-20 °C
• horizontal installation, max.	60 °C
• vertical installation, min.	-20 °C
• vertical installation, max.	50 °C
Ambient temperature during storage/transportation	
• min.	-40 °C
• max.	70 °C
Air pressure acc. to IEC 60068-2-13	

• Storage/transport, min.	660 hPa
• Storage/transport, max.	1 080 hPa
• permissible operating height	-1000 to 2000 m
Relative humidity	
• permissible range (without condensation) at 25 °C	95 %
Vibrations	
• Vibrations	2 g (m/s ²) wall mounting, 1 g (m/s ²) DIN rail
• Operation, tested according to IEC 60068-2-6	Yes
Shock test	
• tested according to IEC 60068-2-27	Yes; IEC 68, Part 2-27 half-sine: strength of the shock 15 g (peak value), duration 11 ms
Extended ambient conditions	
Pollutant concentrations	
— SO ₂ at RH < 60% without condensation	SO ₂ : < 0.5 ppm; H ₂ S: < 0.1 ppm; RH < 60% condensation-free
Configuration	
Programming	
Programming language	
— LAD	Yes; incl. failsafe
— FBD	Yes; incl. failsafe
— SCL	Yes
Know-how protection	
• User program protection	Yes
• Copy protection	Yes
• Block protection	Yes
Cycle time monitoring	
• adjustable	Yes
Dimensions	
Width	130 mm
Height	100 mm
Depth	75 mm
Weights	
Weight, approx.	585 g
last modified:	10/28/2016