

MICROMASTER 4 COMMUTATING CHOKE 200-480 V 3AC 186 A
STAND ALONE FSF - 0.09 MH

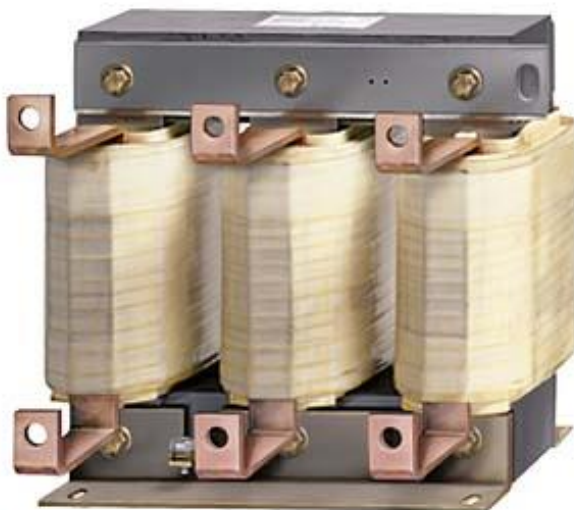


Figure similar

Order number	
Phase number / of the input voltage	3
Type of voltage / of the input voltage	AC
Input voltage	200 ... 480
Output current / rated value	186 A
Power loss [W]	
• at 50 Hz	Wert fehlt!
• at 60 Hz	Wert fehlt!
Type of electrical connection	
• for mains supply line	Flange connection for cable lug M10
• for load-side outgoing feeder	Flange connection for cable lug M10
Type of connectable conductor cross-section / for load-side outgoing feeder	Wert fehlt!
Connectable conductor cross-section	
• for mains supply line	Wert fehlt!
Type of electrical connection / for PE conductor	M8 screw studs
Protection class IP	IP20
Width	240 mm

Height	228 mm
Depth	141 mm
Net weight	24 kg
Certificate of suitability	cURus

Further information

Information und Download Center

https://www.automation.siemens.com/mcms/infocenter/content/en/Pages/order_form.aspx

Technical documentation

<http://w3.siemens.com/mcms/mc-solutions/en/motion-control/support/technical-documentation/Pages/technical-documentation.aspx>

Industry Mall

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/6SE6400-3CC11-7FD0/all>

Industry Online Support

<http://support.automation.siemens.com/WW/view/en/6SE6400-3CC11-7FD0/all>