

CAPACITOR SW. CONTACTOR, AC-6, 25KVAR/400V, 230V, 50/60HZ, 3-POLE, SIZE S0



Figure similar

General technical data	
Protection class IP	IP20
Ambient conditions	
Ambient temperature	
• during operation	-25 ... +60 °C
Main circuit	
Number of NO contacts for main contacts	3
Number of NC contacts for main contacts	0
Operating current	
• at AC-1 at 400 V	
— rated value	35 A
Control circuit/ Control	
Type of voltage	AC
Control supply voltage at AC	
• at 50 Hz rated value	230 ... 230 V
• at 60 Hz rated value	230 ... 230 V

Supply voltage frequency for auxiliary and control current circuit rated value	50 ... 60 Hz
--	--------------

Auxiliary circuit

Number of NC contacts	
• for auxiliary contacts	0
Number of NO contacts	
• for auxiliary contacts	1
Identification number and letter for switching elements	1

Installation/ mounting/ dimensions

Mounting type	screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022
• Side-by-side mounting	Yes
Height	100 mm
Width	45 mm
Depth	135 mm

Connections/Terminals

Type of electrical connection	
• for main current circuit	screw-type terminals
• for auxiliary and control current circuit	screw-type terminals

Certificates/approvals

General Product Approval	Declaration of Conformity	Test Certificates
 CCC	 EAC	 EG-Konf.
 CSA		spezielle Prüfbescheinigungen n
 UL		

Shipping Approval	other
 ABS	Bestätigungen
 GL	Umweltbestätigung
 RMRS	sonstig

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)



<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT1627-1AL21>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1627-1AL21>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1627-1AL21>

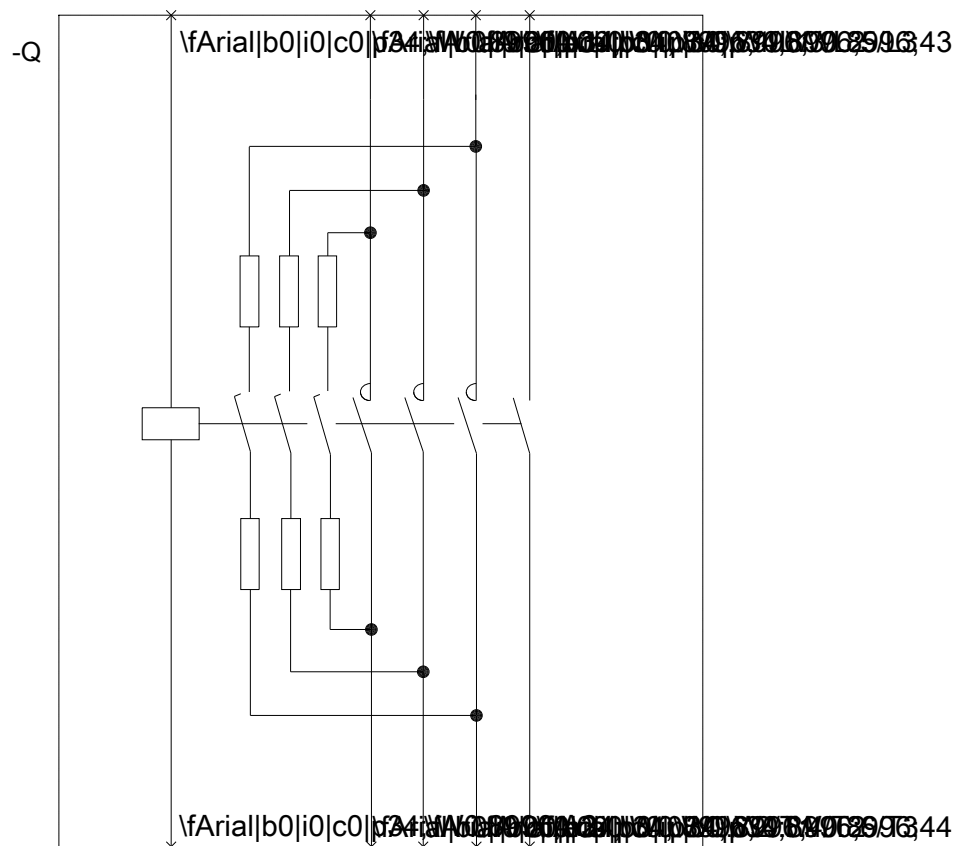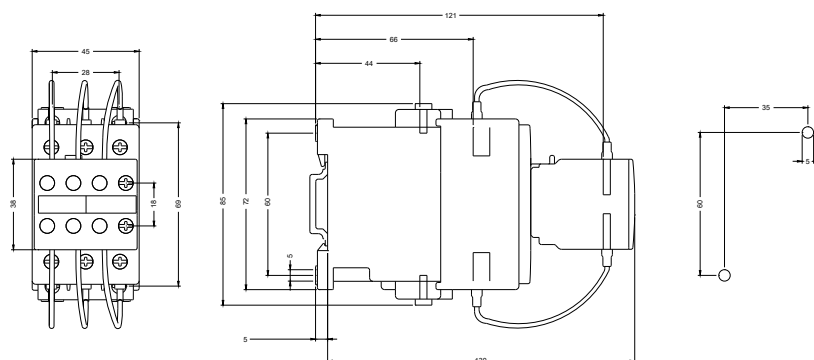

last modified:

10/19/2016