

AS-INTERFACE MODULE SLIMLINE S22.5, DIGITAL, 4A, IP20, 4 X 1 OUTP.,ELECTR., 1A, DC 24V SCREW-TYPE TERMINAL CONNECT. MODULE WIDTH 22.5 MM



Figure similar

General technical data:		
Design of the product		SlimLine S22.5 - I/O modules for operation in the control cabinet, IP20
Design of the slave type		standard slave
Type		4 outputs
I/O configuration		8
ID/ID2 code		0/F
Protocol is supported AS-interface protocol		Yes
AS interface total current input max	mA	40
operating voltage according to AS-Interface spezifikation	V	26.5 ... 31.6
Addressing		front addressing socket
Type of electrical connection of the inputs and outputs		spring-loaded terminals
Equipment marking acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750		A
Equipment marking acc. to DIN EN 61346-2		K

note		An external additional supply (AUX POWER) of 20 to 30 V DC is required for the supply of the output circuits. The additional supply must comply with VDE 0106 (PELV), protection class III.
Note 1		detachment tool for spring-loaded terminal connection: See Accessories

Inputs:

Number of digital inputs		0
---------------------------------	--	---

Outputs:

Number of digital outputs		4
Type of voltage of output voltages		DC
Output voltage at DC at 24 V	V	22 ... 24
Outputs external power supply 24 V DC		using terminals: Terminal 7= L+, Terminal 10 = M
Outputs		
• aggregate current max	A	2
Ampacity		
• of the semiconductor output at DC-13 at 24 V	A	1
Type of switching output		solid state (PNP)
Property of the output Short-circuit proof		Yes
output Polarity reversal protection		built-in
Outputs		
• short-circuit protection		built-in
• induction protection		built-in
• watchdog		built-in
Status display		
• display of I/Os		yellow LED
• AS-Interface		green LED
• FAULT		red LED
Assignment of data bits		
• D0		OUT1
• D1		OUT2
• D2		OUT3
• D3		OUT4

Ambient conditions:

Ambient temperature		
• during operation	°C	-25 ... +70
• during storage	°C	-40 ... +85
Protection class IP		IP20

Mechanical data:

Width	mm	22.5
Height	mm	103

Depth	mm	86
Mounting type		35 mm standard rail mounting or wall mounting using push-in lugs
Conductor cross-section		• solid • finely stranded — with end sleeve — without end sleeve • AWG solid or stranded

2 x (0.25 - 1.5) mm²

2 x (0.25 - 1) mm²

2 x (0.25 - 1.5) mm²

AWG 2 x (24 - 16) mm²

Certificates/ approvals:

AS-Interface certificate	yes (or requested for in case of new units)
Approvals	UL, CSA, shipbuilding (or requested for in case of new units)

General Product Approval	Functional Safety/Safety of Machinery	Declaration of Conformity	Shipping Approval
--------------------------	---------------------------------------	---------------------------	-------------------



[sonstig](#)



Shipping Approval

other



other

[Bestätigungen](#)

[Umweltbestätigung](#)

[sonstig](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1100-1CG00-0AA2>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1100-1CG00-0AA2>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1100-1CG00-0AA2&lang=en

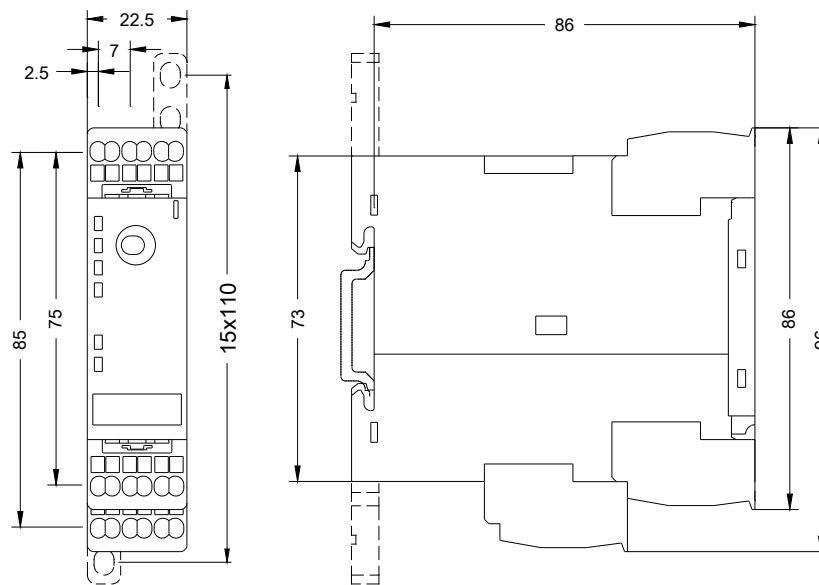

last modified:

10/07/2016