

LV HRC FUSE BASE AC 690V WITH SLEWING EQUIPMENT SIZE
3 630A (SIZE 2 400A) 1POLE W.SCREW-TYPE TERMINAL
CONNECTION



Figure similar

Model	
product brandname	SENTRON
Design of the thread / of the connection screw	M12
Design of the product	LV HRC fuse bases with swivel mechanism
General technical data	
Number of poles	1
Size of fuse system / acc. to DIN EN 60269-1	NH3
circuit-breaker / Design	3NH73
Supply voltage	
• at AC / rated value	690 V
• at DC	440 V
Electricity	
rated current I_n / IEC, DIN/VDE / at 40 Cel	579.6 A
Current / at AC / rated value	630 A
Product details	
Product component / Swivel mechanism	Yes

Maximum short-circuit current breaking capacity (Icu) / at DC / rated value	25 kA
--	-------

Connections

- Connectable conductor cross-section — on box terminal / minimum — on box terminal / maximum	2.5 mm ² 50 mm ²
Tightening torque / with screw-type terminals / maximum	38 N·m
Type of electrical connection for main current circuit	for mounting on mounting plate flat connector

Mechanical Design

Height	285.5 mm
Width	90 mm
Depth	153.5 mm
Mounting type	fixed mounting
Mounting type / bus-mounting	No
Net weight	1 306 g
Equipment marking - acc. to DIN EN 61346-2 - acc. to DIN EN 81346-2	F F

Declaration of Conformity	other
----------------------------------	--------------



[Umweltbestätigung](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3NH7330>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3NH7330/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NH7330

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

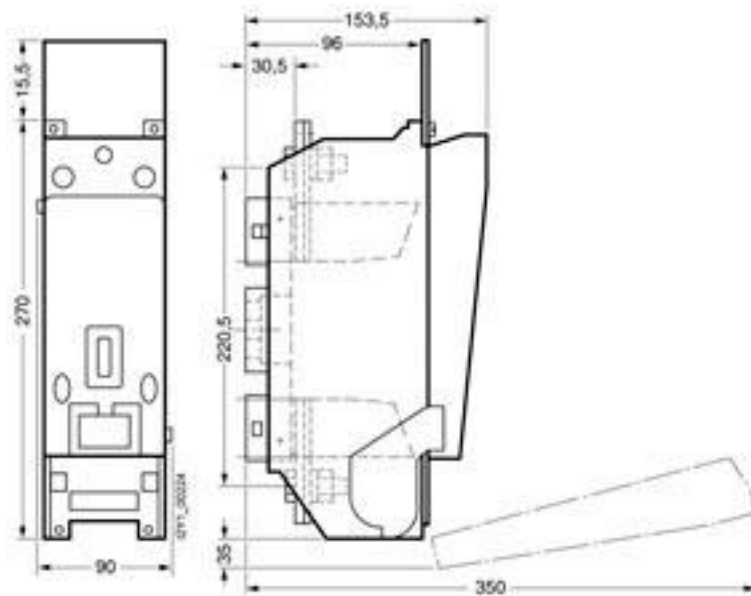


Figure similar