

ACTUATOR-/INDICATOR COMPONENT W. SEPARATE LAMP
TEST FUNCTION LAMP HOLDER BA 9S WITHOUT LAMP, FOR
LAMP MAX.2.6W SCREW TERMINAL RATED VOLTAGE ACC.TO
LAMP SUITABLE FOR LED AC OR DC

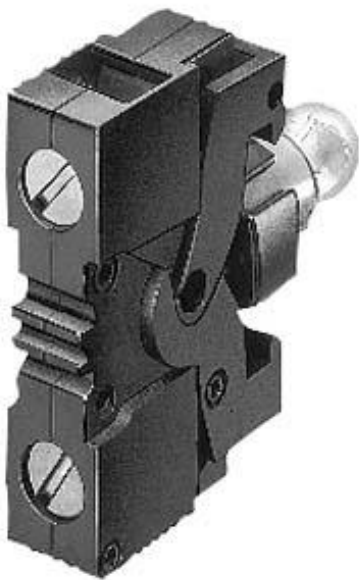


Figure similar

Product designation	lampholder
Contact block/ lampholder:	
Mounting type	BA 9s
Number of lampholders	1
General technical data:	
Product function	
• positive opening	No
Product component	
• diode	No
• lamp transformer	No
• Light source	No
• series resistor	Yes
Insulation voltage	
• rated value	250 V
Degree of pollution	class 3
Type of voltage	
• of the operating voltage	AC/DC

Surge voltage resistance rated value	4 kV
Protection class IP	
• of the enclosure	IP40
• of the terminal	IP20
• with screwed-in light source	IP00
Equipment marking	
• acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	H
• acc. to DIN EN 61346-2	P
• acc. to DIN EN 81346-2	P
Operating voltage	
• at AC	
— at 50 Hz rated value	6 ... 230 V
— at 60 Hz rated value	6 ... 230 V
• at DC	
— rated value	6 ... 230 V

Auxiliary circuit:

Number of NC contacts	
• for auxiliary contacts	0
Number of NO contacts	
• for auxiliary contacts	0
Number of CO contacts	
• for auxiliary contacts	0

Connections/ Terminals:

Type of electrical connection	screw-type terminals
Type of connectable conductor cross-sections	
• for auxiliary contacts	
— solid	2x (1.0 ... 1.5 mm ²)
— solid with core end processing	2x (0.5 ... 0.75 mm ²)
— finely stranded with core end processing	2x (0.5 ... 1.5 mm ²)
• at AWG conductors for auxiliary contacts	2x (18 ... 14)
Tightening torque	
• for auxiliary contacts with screw-type terminals	0.8 N·m

Ambient conditions:

Ambient temperature	
• during operation	-25 ... +60 °C
• during storage	-25 ... +80 °C

Installation/ mounting/ dimensions:

Mounting type	front mounting
Height	45.9 mm
Width	10 mm

Depth

36.8 mm

Certificates/approvals

General Product Approval

Declaration of
Conformity

other



[Umweltbestätigung](#)

[Bestätigungen](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SB3400-1L>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SB3400-1L>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SB3400-1L>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SB3400-1L&lang=en

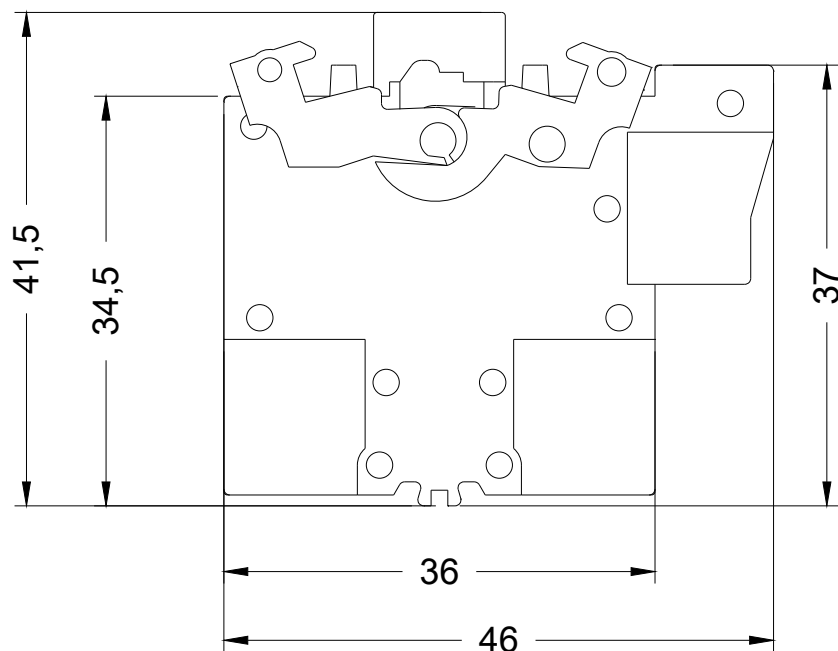

last modified:

10/07/2016