

22MM METAL ROUND ACTUATOR: SELECTOR SWITCH LONG
HANDLE MOMENTARY CONTACT TYPE 3 SWITCH POSITIONS I-
O-II NON-ILLUMINATED WITH HOLDER BLACK SOLVENT-
RESISTANT



Figure similar

Design of the product	Single device round
Enclosure:	
Number of command points	1
Actuator:	
Design of the operating mechanism	selector switch
Manner of function of the actuating element	Momentary contact type
Product extension optional Light source	No
Color	
• of the actuating element	black
Material of the actuating element	plastic
Shape of the actuating element	Extended handle
Outer diameter of the actuating element	28.5 mm
Type of unlocking device	without
Number of switching positions	3
Actuating angle	
• clockwise	50°
• anticlockwise	50°

Front ring:	
Product component front ring	Yes
Design of the front ring	Standard
Material of the front ring	metal
Color of the front ring	silver

Holder:	
Material of the holder	Metal

General technical data:	
Product function	
• EMERGENCY OFF function	No
• EMERGENCY STOP function	No
Protection class IP	IP67
Vibration resistance	
• acc. to IEC 60068-2-6	20 ... 200 Hz: 5g
Operating frequency maximum	1 000 1/h
Mechanical service life (switching cycles)	
• typical	300 000
Equipment marking	
• acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	S
• acc. to DIN EN 61346-2	S
• acc. to DIN EN 81346-2	S

Connections/ Terminals:	
Tightening torque of the screws in the bracket	1.4 ... 1.6 N·m

Ambient conditions:	
Ambient temperature	
• during operation	-25 ... +70 °C
• during storage	-40 ... +80 °C
Environmental category during operation acc. to IEC 60721	3K6

Installation/ mounting/ dimensions:	
Mounting type	front mounting
Shape of the installation opening	round
Mounting diameter	22 mm
Mounting height	28 mm
Installation width	37 mm
Installation depth	29 mm

Certificates/approvals	
-------------------------------	--

General Product Approval	Declaration of Conformity	Test Certificates	Shipping Approval
 CSA	 EAC	 EG-Konf.	 ABS
		spezielle Prüfbescheinigung n	 DNV

Shipping Approval	other
 LRS	 PRS
 RINA	Umweltbestätigung
	sonstig
	Bestätigungen

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SB3500-3TA11>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SB3500-3TA11>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SB3500-3TA11>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SB3500-3TA11&lang=en

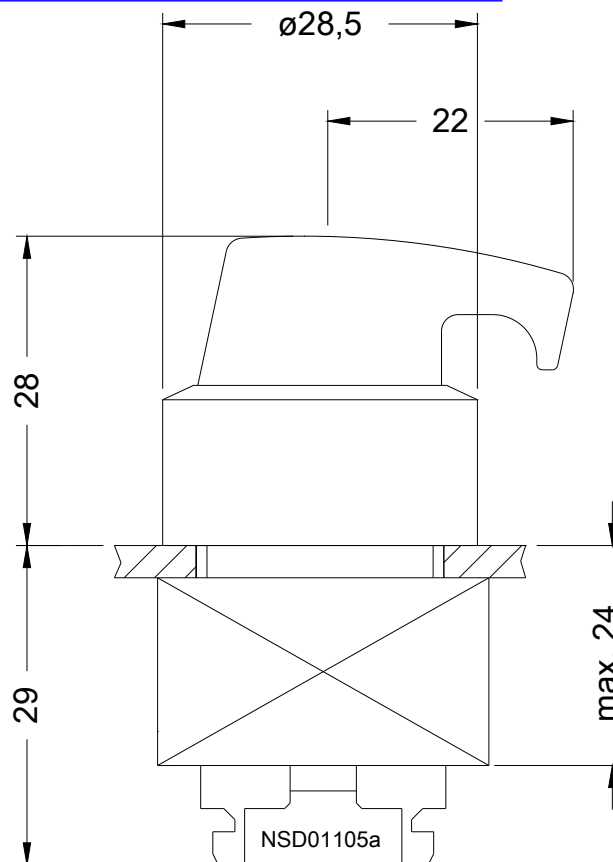

last modified:

10/07/2016