

INTERFACE CONVERTER !!! PHASE-OUT PRODUCT !!! FOR
FURTHER INFORMATION PLEASE CONTACT OUR SALES
STAFF! UC 24-240 V, 3 WAY SEPARATION ON: 16 SIGNALS OFF:
0 TO 10 V; 0/4 TO 20 MA SCREW CONNECTION



General technical data	
product brandname	SIRIUS
Product designation	universal converter
Design of the base unit	switchable, active
Number of channels	1
Ambient temperature	
• during operation	-25 ... +60 °C
• during transport	-40 ... +85 °C
• during storage	-40 ... +85 °C
Insulation voltage for overvoltage category III according to IEC 60664 with degree of pollution 2 rated value	300 V
Consumed active power	0.75 W
Protection class IP	IP20
Vibration resistance acc. to IEC 60068-2-6	10 ... 55 Hz: 0.35 mm
Shock resistance acc. to IEC 60068-2-27	15g / 11 ms
Equipment marking acc. to DIN EN 61346-2	K
Equipment marking acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	K

Connections/Terminals	
Type of electrical connection	screw-type terminals
Tightening torque with screw-type terminals	0.4 ... 0.5 N·m
Type of connectable conductor cross-sections	• solid 1x (0.5 ... 2.5 mm²) • finely stranded with core end processing 2x (0.5 ... 2.5 mm²) • at AWG conductors — stranded 2x (20 ... 16)
Galvanic isolation	
Design of the electrical isolation	3 paths
Galvanic isolation	• between entrance and outlet Yes • between the voltage supply and other circuits Yes
Supply voltage	
Type of voltage	AC/DC
Supply voltage frequency rated value	50 ... 60 Hz
Supply voltage	• at AC — at 50 Hz rated value 24 ... 240 V — at 60 Hz rated value 24 ... 240 V • at DC rated value 24 ... 240 V
Operating range factor supply voltage rated value	• at AC — at 50 Hz 0.8 ... 1.1 — at 60 Hz 0.8 ... 1.1 • at DC 0.7 ... 1.1
Inputs	
Limit frequency	30 Hz
Input voltage maximum	30 V
Type of signal at input	0 ... 60 mV, 0 ... 100 mV, 0 ... 300 mV, 0 ... 500 mV, 0 ... 1 V, 0 ... 2 V, 0 ... 5 V, 0 ... 10 V, 0 ... 20 V, 2 ... 10 V, 0 ... 5 mA, 0 ... 10 mA, 0 ... 20 mA, 4 ... 20 mA, +/-5 mA, +/-20 mA
Outputs	
Load at the current output maximum	400 Ω
Load at voltage output maximum	1 kΩ
Property of the output Short-circuit proof	Yes
Overvoltage strength at the current output maximum	30 V
Type of signal at output	0 ... 10 V, 0 ... 20 mA, 4 ... 20 mA
Precision	
Relative metering precision	0.1 %
Relative linearity deviation	0.02 %

Temperature drift per °C	0.015 %/°C
Rise time	10 ms
Settling time for 1 % deviation	30 ms
Voltage ripple maximum	5 mV

Installation/ mounting/ dimensions

Mounting type	snap-on mounting on 35 mm DIN rail according to DIN EN 50022
Mounting position	any
Height	79 mm
Width	17.5 mm
Depth	84 mm

Certificates/approvals

General Product Approval	Declaration of Conformity	Test Certificates	other
--------------------------	---------------------------	-------------------	-------



[spezielle
Prüfbescheinigunge
n](#)

[Umweltbestätigung](#)

[Bestätigungen](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RS1706-1FW00>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RS1706-1FW00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RS1706-1FW00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RS1706-1FW00&lang=en

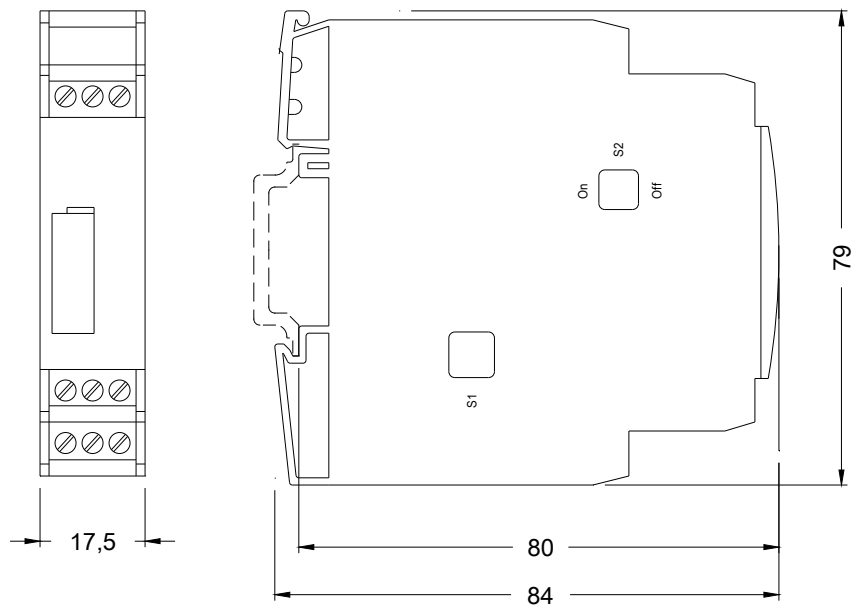

last modified:

10/17/2016