


DELTA PUSHB. INSERT, FM DOUBLE PUSHB., 2NO CONTACTS
10A 250V

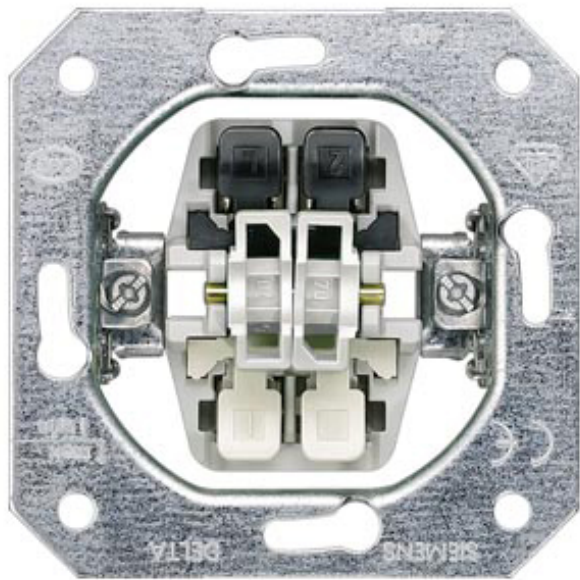

Model	
Design of the product	single pushbutton
Design of the switching function	2 NO contacts
Type of composition	basic element
Design of the operating mechanism	pushbutton/momentary pushbutton
General technical data	
Printed marking	Without
Mounting type	fixing with claw and screw
Surface processing	others
Material	others
Protection class	
Protection class IP	IP20
Switching capacity	
Switching capacity current	10 A
Main circuit	
Operating voltage / Rated value	250 V
Operating current / rated value	10 A

Appearance	
Appearance	not applicable
Color	miscellaneous

Product details	
Product component	
• Labeling field	No
• Integrated / Light source	No
• Signaling contact	No
Product feature	
• halogen-free	Yes
• transparent	No

Number	
Number of actuating rockers	2

Mechanical Design	
Height	70 mm
Width	70 mm
Depth	32 mm
Mounting type	flush mounted
Material / of the enclosure	metal

General Product Approval	Declaration of Conformity	Test Certificates
 CCC	 EAC	 EG-Konf.
 ÖVE	 VDE	sonstig

Test Certificates
Typprüfbescheinigung/Werkszeugnis

Further information
Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system) https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5TD2111
Service&Support (Manuals, Certificates, Characteristics, FAQs,...) http://support.automation.siemens.com/WW/view/en/5TD2111/all
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TD2111
CAX-Online-Generator http://www.siemens.com/cax

