


AS-INTERFACE COMPACT MOD. K45, IP67, DIGITAL,
4 INPUTS 4 X 1 INPUT, 200MA MAX., PNP 4 X M12
SOCKET

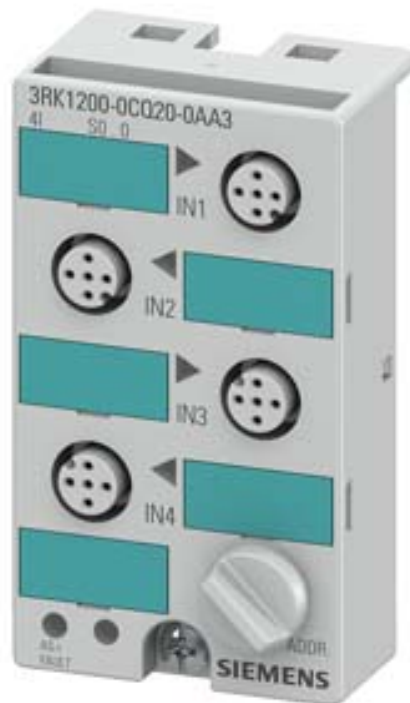

General technical data:

Design of the product		digital I/O modules for operation in the field, IP67 - K45
Type		4 inputs
Design of the slave type		standard slave
I/O configuration		0
ID/ID2 code		0/F
Number I/O sockets		4
Type of electrical connection of the inputs and outputs		M12 screw-type terminals
AS interface total current input max	mA	270
operating voltage according to AS-Interface specification	V	26.5 ... 31.6
Ground terminal		Using PIN5 on the M12 sockets. Outgoing via flat tab sleeve (2.8 x 0.8 mm form A)
Addressing		front addressing socket
AS interface Connection Polarity reversal protection		built-in
Delivery note		the modules are delivered without mounting plate
Note 1		All K45 compact modules are delivered with stainless steel screws/sockets

Sensor supply:		
Type of voltage supply for power supply		using AS-Interface
Input voltage	V	20 ... 30
Property of the sensor supply Short-circuit and overload resistant		Yes
Ampacity of the sensor supply for all inputs at ambient temperature 40 °C	mA	200

Inputs:		
Number of digital inputs		4
Type of connection		2- and 3-wire technology
Input circuit		PNP transistor
Type of voltage of the input voltages		DC
Inputs switching level High min	V	10
Input current at digital input - for signal <1> minimum - with signal <0> maximum	mA mA	6 1.5
Inputs sensor supply using AS-Interface		short-circuit and overload resistant
Inputs socket assignment - PIN 1 - PIN 2 - PIN 3 - PIN 4 - PIN 5		sensor supply L+ data input sensor supply L- data input ground terminal
Design of the pin assignment of the inputs		standard assignment

Outputs:		
Number of digital outputs		0
Status display - display of I/Os - display of Uaux - display of AS-Interface/diagnostics		yellow LED not required green/red dual LED
Assignment of data bits - socket - socket 2 - socket 3 - socket 4		PIN 4/2 = IN1 (D0) PIN 4/2 = IN2 (D1) PIN 4/2 = IN3 (D2) PIN 4/2 = IN4 (D3)

Ambient conditions:		
Ambient temperature - during operation - during storage	°C °C	-25 ... +85 -40 ... +85
Protection class IP		IP67

Mechanical data:		
------------------	--	--

Width	mm	45
Height	mm	80
Depth	mm	30
Mounting type		standard rail mounting/wall mounting using mounting plate for K45 compact module

Certificates/ approvals:

AS-Interface certificate		yes
Approvals		UL, CSA, shipbuilding

General Product Approval	Functional Safety/Safety of Machinery	Declaration of Conformity	Shipping Approval
--------------------------	---------------------------------------	---------------------------	-------------------



[sonstig](#)



Shipping Approval	other
-------------------	-------



other

[Umweltbestätigung](#)

[Bestätigungen](#)

[sonstig](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1200-0CQ20-0AA3>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1200-0CQ20-0AA3>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1200-0CQ20-0AA3&lang=en

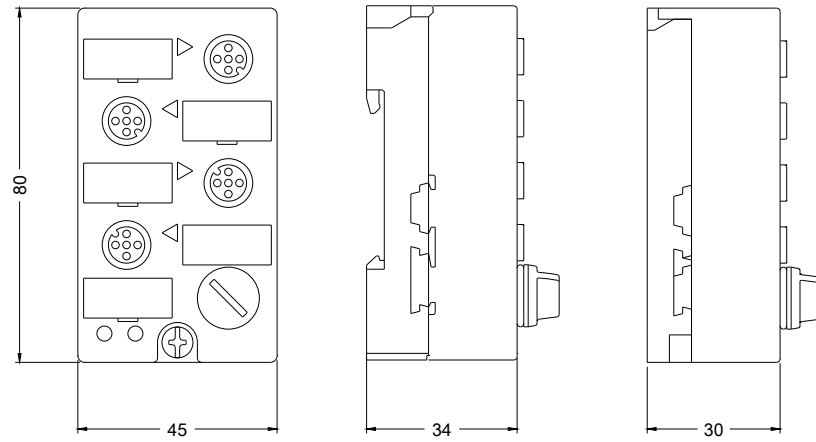

last modified:

10/07/2016