SIEMENS

Show actual product details

Data sheet 3RK1901-1NR22

AS-INTERFACE M12 BRANCH AS-I AND U-AUX, CABLE, 2M, WITH M12 ANGLE PLUG IP 67/68/69K, MAX. 6A

General technical data:		
Type of device		AS-Interface accessories
Design of the product		AS-i M12 feeder, AS-i with Uaux, 2 m cable
Function		AS-i flat cable transition to M12
operating voltage according to AS-Interface spezification	V	26.5 ... 31.6
Note		cable must not end in the feeder
Note 1		cable must not end in a feeder
Connections/ Terminals:		
connection		insulation piercing method for AS-Interface flat cable
Connection system		insulation piercing method for AS-Interface flat cable
AS interface		
• Connection		M12 cable box 2 m
Inputs:		
Inputs socket assignment		1 = AS-i "+" 2 = Uaux "-" 3=AS-i "-" 4 = Uaux "+"
Mechanical data:		
Type of mounting		screw fixing
Contacts Load rating max	A	4
Ambient conditions:		
ambient temperature	°C	-25 ... +75
ambient temperature when stored	°C	-25 ... +85
degree of protection		IP67/68/69K
Certificates/ approvals:		

General Product Approval			Functional Safety/Safety of Machinery	Declaration of Conformity	Shipping Approval
CSA	UL	EAC	sonstig	EG-Konf.	ABS

Shipping Approval			other	
DNV	PRS	RMRS	Umweltbestätigung	Bestätigungen

Further information

Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)
http://www.siemens.com/industrymall

Cax online generator
http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1901-1NR22

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3RK1901-1NR22

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1901-1NR22&lang=en

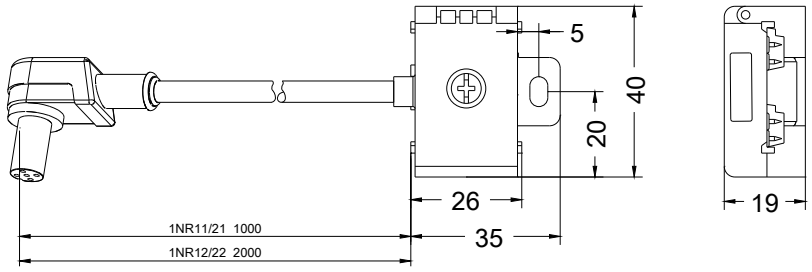

last modified:	10/07/2016