

MECHANICAL LATCHING BLOCK FOR MOUNTING
ON 3RT1.2. AND 3RT1.3, 110 V AC/DC



Figure similar

General technical data:		
product brand name		SIRIUS
Product designation		mechanical latch
Size of contactor		S0, S2
Protection class IP on the front		IP20
Insulation voltage with degree of pollution 3 rated value	V	690
Ambient temperature		
• during storage	°C	-50 ... +80
• during operation	°C	-25 ... +60
Auxiliary circuit:		
Number of NC contacts		
• for auxiliary contacts		0
Number of NO contacts		
• for auxiliary contacts		0
Control circuit/ Control:		
Type of voltage of the control supply voltage		AC/DC

Installation/ mounting/ dimensions:

Mounting type		clip-on
Mounting position		any

Connections/ Terminals:

Type of electrical connection for auxiliary and control current circuit		screw-type terminals
Type of connectable conductor cross-sections • for auxiliary contacts — solid — finely stranded — with core end processing • at AWG conductors for auxiliary contacts		2x (0.5 ... 2.5 mm ²), 1x 4 mm ² 2x (0.5 ... 2.5 mm ²), 1x 2.5 mm ² 2x 14, 1x 12

Certificates/ approvals:

Certificate of suitability		CE / UL / CSA / CCC
----------------------------	--	---------------------

General Product Approval			Declaration of Conformity	Test Certificates	Shipping Approval
 CSA	 UL	 EAC	 EG-Konf.	spezielle Prüfbescheinigungen <u>n</u>	 ABS

Shipping Approval



Shipping Approval	other
 RMRS	Umweltbestätigung Bestätigungen sonstig

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)



<http://www.siemens.com/industrymall>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1926-3AF31>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1926-3AF31>

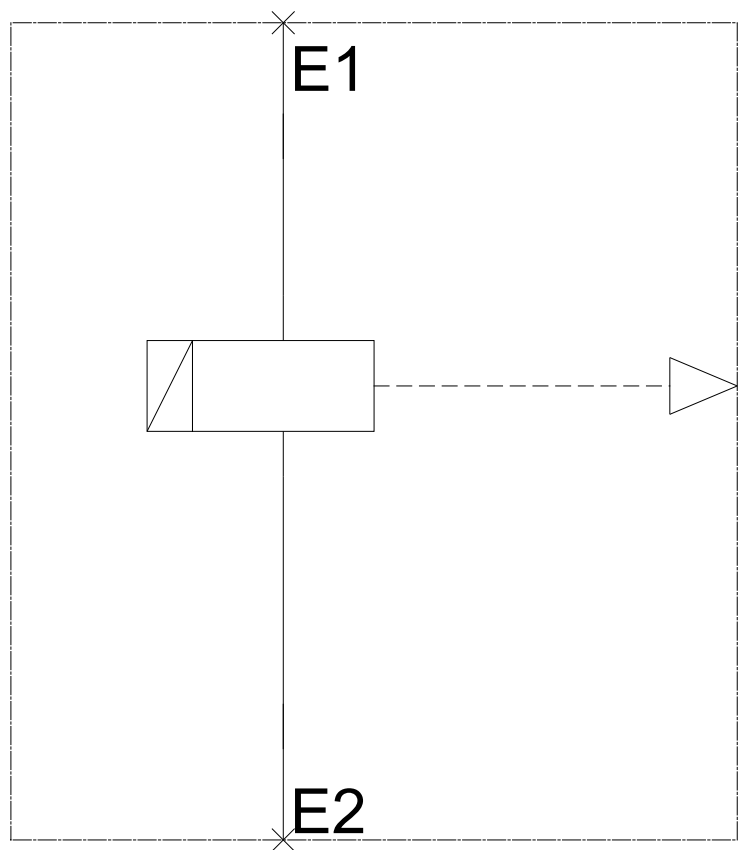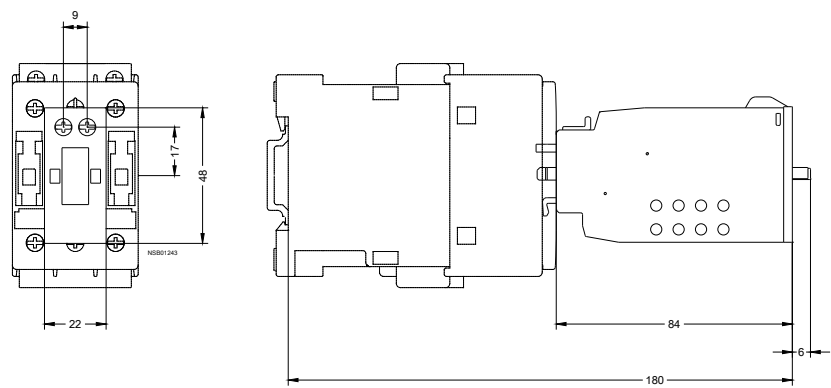

last modified:

10/07/2016