

CONTACTOR 1-PH, 140A/400V 480 V AC, 60 HZ AUX. CONTACTS
2N + 2NC LATERAL 3-POLE, SIZE S3 BAR CONNECTIONS



Figure similar

product brandname	SIRIUS
Product designation	power contactor
General technical data	
Size of contactor	S3
Insulation voltage	
• rated value	1 000 V
Degree of pollution	3
Surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation	
• between coil and main contacts acc. to EN 60947-1	690 V
Protection class IP	
• on the front	IP00
• of the terminal	IP00
Shock resistance	
• at rectangular impulse	
— at AC	6,8g / 5 ms, 4g / 10 ms

• with sine pulse — at AC	10,6g / 5 ms, 6,2g / 10 ms
Mechanical service life (switching cycles)	
• of contactor typical	10 000 000
• of the contactor with added electronics-compatible auxiliary switch block typical	5 000 000
• of the contactor with added auxiliary switch block typical	10 000 000
Ambient conditions	
Installation altitude at height above sea level maximum	2 000 m
Ambient temperature	
• during operation	-25 ... +60 °C
• during storage	-55 ... +80 °C
Main circuit	
Number of poles for main current circuit	3
Number of NO contacts for main contacts	3
Number of NC contacts for main contacts	0
Operating current	
• at AC-1 at 400 V — at ambient temperature 40 °C rated value	140 A
• at AC-1 — up to 690 V at ambient temperature 40 °C rated value	140 A
— up to 690 V at ambient temperature 60 °C rated value	130 A
— up to 1000 V at ambient temperature 40 °C rated value	60 A
— up to 1000 V at ambient temperature 60 °C rated value	60 A
• at AC-3 — at 400 V rated value	44 A
— at 690 V rated value	44 A
Connectable conductor cross-section in main circuit at AC-1	
• at 60 °C minimum permissible	35 mm ²
• at 40 °C minimum permissible	50 mm ²
Operating current	
• at 1 current path at DC-1 — at 24 V rated value	130 A
— at 110 V rated value	12 A
• with 2 current paths in series at DC-1	

— at 24 V rated value	130 A
— at 110 V rated value	130 A
• with 3 current paths in series at DC-1	
— at 24 V rated value	130 A
— at 110 V rated value	130 A
Operating current	
• at 1 current path at DC-3 at DC-5	
— at 24 V rated value	6 A
— at 110 V rated value	1.25 A
• with 2 current paths in series at DC-3 at DC-5	
— at 110 V rated value	130 A
— at 24 V rated value	130 A
• with 3 current paths in series at DC-3 at DC-5	
— at 110 V rated value	130 A
— at 24 V rated value	130 A
Operating power	
• at AC-1	
— at 230 V at 60 °C rated value	50 kW
— at 400 V rated value	86 kW
— at 690 V rated value	148 kW
— at 690 V at 60 °C rated value	148 kW
— at 1000 V at 60 °C rated value	98 W
• at AC-2 at 400 V rated value	22 kW
• at AC-3	
— at 230 V rated value	12.7 kW
— at 400 V rated value	22 kW
— at 500 V rated value	29.9 kW
— at 690 V rated value	38.2 kW
Thermal short-time current limited to 10 s	600 A
Power loss [W] at AC-3 at 400 V for rated value of the operating current per conductor	12.5 W
No-load switching frequency	
• at DC	1 000 1/h
Operating frequency	
• at AC-1 maximum	650 1/h
Control circuit/ Control	
Type of voltage of the control supply voltage	AC
Control supply voltage at AC	
• at 60 Hz rated value	480 V
Control supply voltage frequency 1 rated value	60 Hz
Operating range factor control supply voltage rated value of magnet coil at AC	

• at 60 Hz	0.8 ... 1.1
Apparent pick-up power of magnet coil at AC	300 V·A
Inductive power factor with closing power of the coil	0.52
Apparent holding power of magnet coil at AC	21 V·A
Inductive power factor with the holding power of the coil	0.29
Closing delay	
• at DC	90 ... 230 ms
Opening delay	
• at DC	14 ... 20 ms
Arcing time	10 ... 15 ms

Auxiliary circuit

Number of NC contacts	
• for auxiliary contacts	
— instantaneous contact	2
Number of NO contacts	
• for auxiliary contacts	
— instantaneous contact	2
Operating current at AC-12 maximum	10 A
Operating current at AC-15	
• at 230 V rated value	6 A
• at 400 V rated value	3 A
Operating current at DC-12	
• at 60 V rated value	6 A
• at 110 V rated value	3 A
• at 220 V rated value	1 A
Operating current at DC-13	
• at 24 V rated value	10 A
• at 60 V rated value	2 A
• at 110 V rated value	1 A
• at 220 V rated value	0.3 A
Contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)

UL/CSA ratings

Contact rating of auxiliary contacts according to UL	A600 / Q600
--	-------------

Short-circuit protection

Design of the fuse link	
• for short-circuit protection of the main circuit	
— with type of coordination 1 required	fuse gL/gG: 250 A
— with type of assignment 2 required	Fuse gR: 250 A
• for short-circuit protection of the auxiliary switch required	fuse gL/gG: 10 A

Installation/ mounting/ dimensions

Mounting type	screw and snap-on mounting onto 35 mm and 75 mm standard mounting rail
• Side-by-side mounting	Yes
Height	146 mm
Width	90 mm
Depth	139 mm
Required spacing	
• for grounded parts — at the side	6 mm

Connections/Terminals

Type of electrical connection	
• for main current circuit • for auxiliary and control current circuit	screw-type terminals screw-type terminals
Type of connectable conductor cross-sections	
• at AWG conductors for main contacts	7 ... 1/0
Type of connectable conductor cross-sections	
• for auxiliary contacts — solid — finely stranded with core end processing • at AWG conductors for auxiliary contacts	2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²), max. 2x (0.75 ... 4 mm ²) 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²) 2x (20 ... 16), 2x (18 ... 14), 1x 12

Certificates/approvals

General Product Approval				Declaration of Conformity	Test Certificates
 CCC	 CSA	 UL	 EAC	 EG-Konf.	spezielle Prüfbescheinigungen n
Shipping Approval				other	
 ABS	 GL	 RINA	 RMRS	Bestätigungen	Umweltbestätigung
other					
sonstig					

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT1446-6AV66>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1446-6AV66>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1446-6AV66>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT1446-6AV66&lang=en

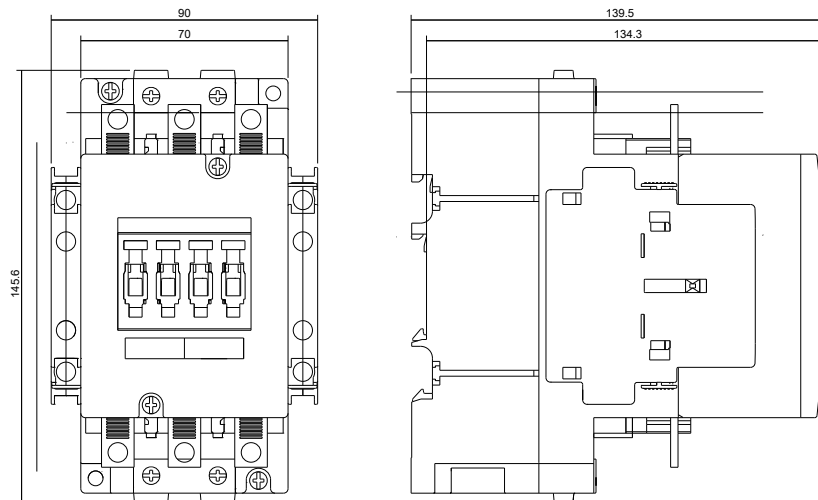


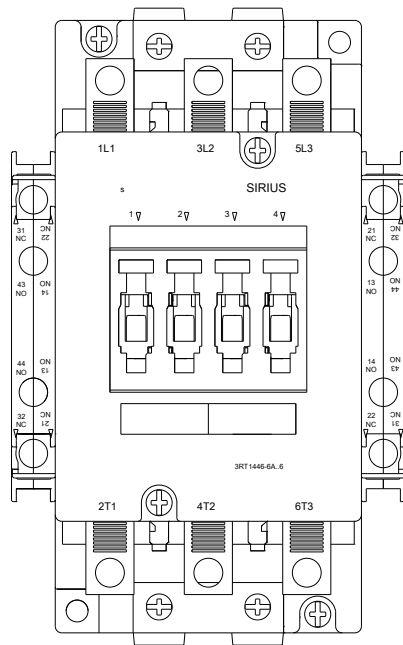

Alle Bemessungswerte sind in Millimeter (mm) angegeben
All dimensions are in millimeters (mm)

3RT1446-6A_6_ASB

1:1

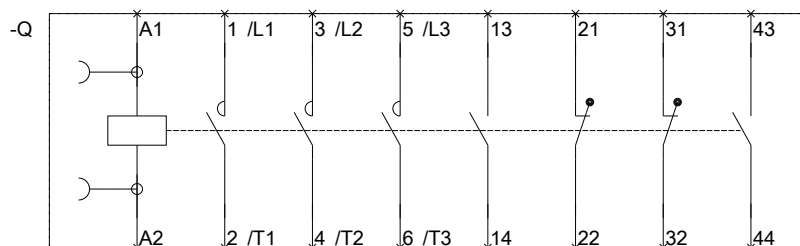

last modified:

10/31/2016