

AS-INTERFACE FUNCTION MODULE LOGO!
STANDARD SLAVE IP20 4DI/4DO COMPATIBLE WITH
SERIES 0BA6 AND 0BA7



General technical data:		
Design of the product		AS-Interface connection for LOGO!
Type		4 inputs (virtual) / 4 outputs (virtual)
Design of the slave type		standard slave
Supply voltage DC	V	24
Status display display of AS-Interface/diagnostics		green/red dual LED
Inputs:		
Number of digital inputs		4
Outputs:		
Number of digital outputs		4
Ambient conditions:		
Ambient temperature during operation	°C	0 ... 55
Protection class IP		IP20
Mechanical data:		
Width	mm	36
Height	mm	90
Depth	mm	58

Mounting type	on standard rail
---------------	------------------

Certificates/ approvals:

General Product Approval	Functional Safety/Safety of Machinery	Declaration of Conformity	Test Certificates
 CSA	 UL		sonstig  EG-Konf.
			spezielle Prüfbescheinigungen

Shipping Approval	other
 ABS	 ASi
 LRS	
 PRS	
 RINA	
 RMRS	

other
Umweltbestätigung Bestätigungen sonstig

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1400-0CE10-0AA2>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1400-0CE10-0AA2>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1400-0CE10-0AA2&lang=en

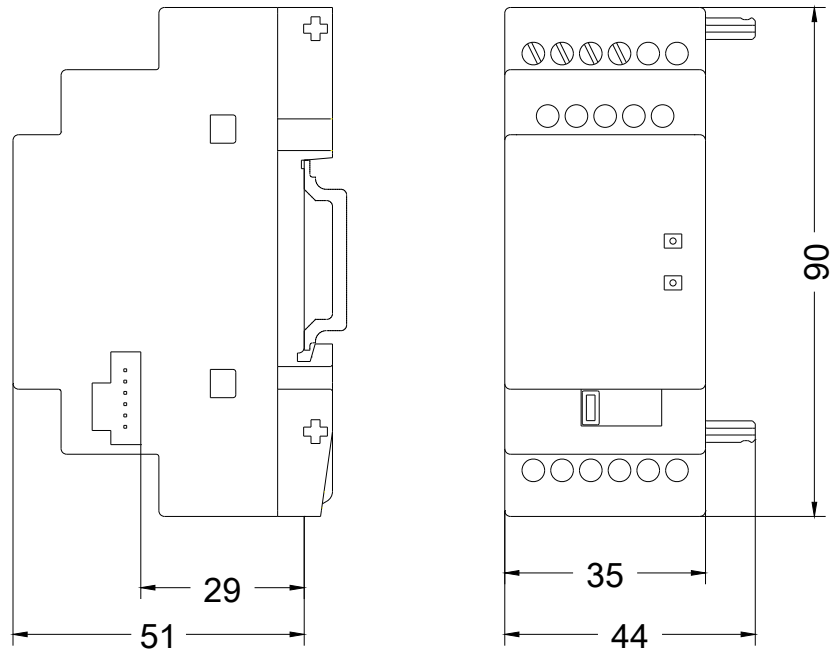

last modified:

10/07/2016