

FEED-THROUGH TERMINAL WITH SPRING CONNECTION,
COMPACT DESIGN, 3 CONNECT. POINTS SECTION: 0.08 - 2.5
MM2, WIDTH: 5.2 MM, COLOR: BLUE

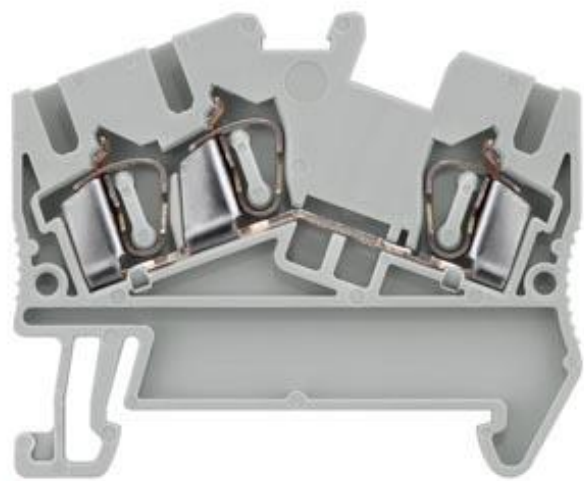


Figure similar

Model	
Design of terminal / Terminal levels internally linked	No
General technical data	
Terminal contact spacing	5.2 mm
Protection class	
Combustibility class acc. to UL 94	V0
Main circuit	
Operating voltage / rated value	800 V
Operating current / rated value	28 A
Appearance	
Color	grey
Product details	
Product component / required / connection plate	No
Number	
Number of terminal levels	1

Number of terminal points / per terminal level	2
--	---

Connections

Connectable conductor cross-section / stranded	
• minimum	4 mm ²
• maximum	4 mm ²
Wire stripping length	10 mm
Connectable conductor cross-section	
• solid	
— minimum	4 mm ²
— maximum	4 mm ²
• finely stranded	
— with core end processing / minimum	2.5 mm ²
— with core end processing / maximum	2.5 mm ²
— without core end processing / minimum	2.5 mm ²
— without core end processing / maximum	2.5 mm ²
Type of electrical connection	
• 1	spring-loaded terminal
• 2	spring-loaded terminal
Position / of the terminal	top

Mechanical Design

Height / with lowest-profile installation	43 mm
Length	51 mm
Mounting type	DIN rail 35 mm
Net weight	8 g
Material / of the insulating body	Other

Environmental conditions

Ambient temperature	
• during operation / minimum	-25 °C
• during operation / maximum	55 °C

Certificates

Design tested acc. to type of protection / EEx e		No
General Product Approval	Declaration of Conformity	other



[sonstig](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/8WH2503-0AF01>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/8WH2503-0AF01/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WH2503-0AF01

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>