

3-PHASE LINE-SIDE TERMINAL, F. 3-PHASE
BUSBAR, CONNECTION FROM BELOW



General technical data:		
product brand name		SIRIUS
Product designation		Three-phase feeder terminal
Size of the circuit-breaker		S00, S0
Protection class IP on the front		IP20
Insulation voltage with degree of pollution 3 rated value	V	690
Ambient temperature		
• during storage	°C	-50 ... +80
• during operation	°C	-20 ... +60
Ampacity maximum	A	63
Installation/ mounting/ dimensions:		
Width	mm	44
Height	mm	73
Depth	mm	48
Connections/ Terminals:		
Type of electrical connection for main current circuit		screw-type terminals
Type of connectable conductor cross-sections		

- for main contacts
 - solid
 - stranded
 - finely stranded
 - with core end processing
- at AWG conductors for main contacts

1x (2.5 ... 16 mm²)
 1x (2.5 ... 25 mm²)

 1x (4 ... 16 mm²)
 1x (12 ... 4)

Certificates/ approvals:

Certificate of suitability

CE / UL / CSA / CCC

General Product Approval	Declaration of Conformity	Test Certificates	Shipping Approval	
 CSA	 UL	 EG-Konf.	spezielle Prüfbescheinigungen n  BUREAU VERITAS	 DNV

Shipping Approval		other	
 PRS	 RMRS	Bestätigungen	Umweltbestätigung
		 VDE	

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV1915-5B>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV1915-5B>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV1915-5B&lang=en

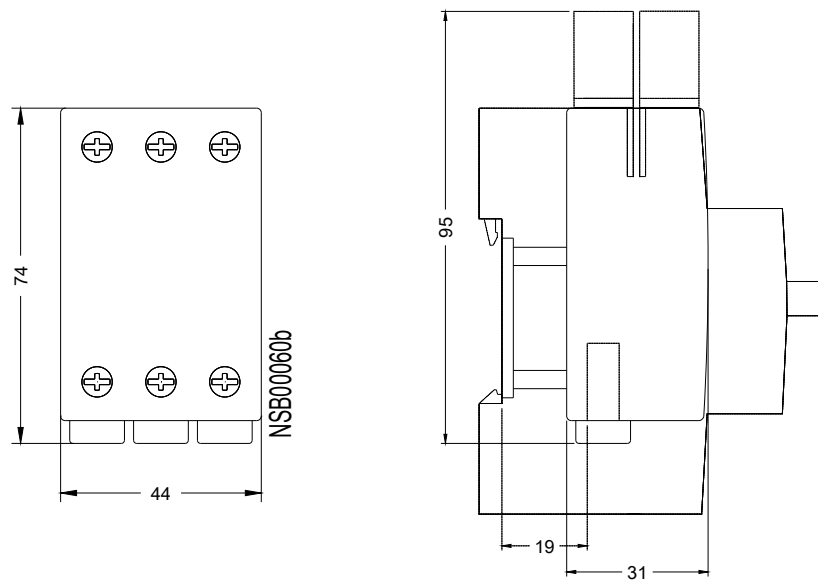

last modified:

10/07/2016