

26X26MM PLASTIC SQUARE COMPLETE UNIT COMBINATION:  
INDICATOR LIGHT WITH SMOOTH LENSE ILLUMINATED WITH  
INTEGRATED LED 24V AC/DC SCREW TERMINAL WITH HOLDER  
BLUE

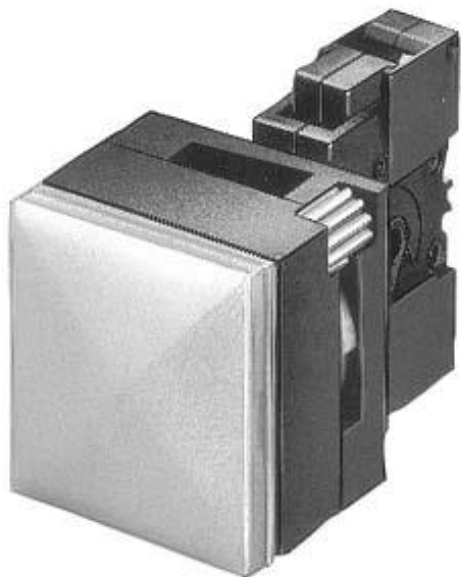


Figure similar

|                                         |                       |
|-----------------------------------------|-----------------------|
| Design of the product                   | Complete unit, square |
| Enclosure:                              |                       |
| Shape of the enclosure front            | Square                |
| Material of the enclosure               | plastic               |
| Number of command points                | 0                     |
| Actuator:                               |                       |
| Design of the operating mechanism       | indicator light       |
| Product extension optional Light source | Yes                   |
| Color                                   |                       |
| • of the actuating element              | Blue                  |
| Material of the actuating element       | plastic               |
| Shape of the actuating element          | Smooth lens           |
| Number of switching positions           | 0                     |
| Front ring:                             |                       |
| Product component front ring            | No                    |
| Holder:                                 |                       |

|                                                                     |                      |
|---------------------------------------------------------------------|----------------------|
| <b>Material of the holder</b>                                       | Plastic              |
| <b>Contact block/ lampholder:</b>                                   |                      |
| <b>Mounting type</b>                                                | integrated LED       |
| <b>Number of lampholders</b>                                        | 1                    |
| <b>Number of switching elements</b>                                 | 0                    |
| <b>General technical data:</b>                                      |                      |
| <b>Product function</b>                                             |                      |
| • positive opening                                                  | No                   |
| • EMERGENCY STOP function                                           | No                   |
| <b>Product component</b>                                            |                      |
| • Light source                                                      | Yes                  |
| <b>Protection class IP</b>                                          | IP66                 |
| <b>Vibration resistance</b>                                         |                      |
| • acc. to IEC 60068-2-6                                             | 20 ... 200 Hz: 5g    |
| <b>Equipment marking</b>                                            |                      |
| • acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750 | H                    |
| • acc. to DIN EN 61346-2                                            | P                    |
| • acc. to DIN EN 81346-2                                            | P                    |
| <b>Supply voltage:</b>                                              |                      |
| <b>Type of voltage of the supply voltage</b>                        |                      |
| • of the light source                                               | AC/DC                |
| <b>Supply voltage 1 of the light source at AC</b>                   |                      |
| • at 50 Hz rated value                                              | 24 V                 |
| • at 60 Hz rated value                                              | 24 V                 |
| <b>Supply voltage 1 of the light source at DC</b>                   |                      |
| • rated value                                                       | 24 V                 |
| <b>Relative negative tolerance of the supply voltage</b>            | -15 %                |
| <b>Relative positive tolerance of the supply voltage</b>            | 10 %                 |
| <b>Auxiliary circuit:</b>                                           |                      |
| <b>Number of NC contacts</b>                                        |                      |
| • for auxiliary contacts                                            | 0                    |
| <b>Number of NO contacts</b>                                        |                      |
| • for auxiliary contacts                                            | 0                    |
| <b>Number of CO contacts</b>                                        |                      |
| • for auxiliary contacts                                            | 0                    |
| <b>Consumed current for rated value of supply voltage maximum</b>   | 18 mA                |
| <b>Connections/ Terminals:</b>                                      |                      |
| <b>Type of electrical connection</b>                                | screw-type terminals |
| <b>Tightening torque of the screws in the bracket</b>               | 0.9 ... 1.1 N·m      |

#### Ambient conditions:

##### Ambient temperature

- during operation -25 ... +70 °C
- during storage -40 ... +80 °C

Environmental category during operation acc. to IEC 60721

3K6

#### Installation/ mounting/ dimensions:

|                                   |                |
|-----------------------------------|----------------|
| Mounting type                     | front mounting |
| Shape of the installation opening | square         |
| Mounting height                   | 7 mm           |
| Installation width                | 30 mm          |
| Installation depth                | 49 mm          |

#### Certificates/approvals

##### General Product Approval



EG-Konf.

##### Test Certificates

[spezielle  
Prüfbescheinigungen](#)  
[n](#)



ABS



DNV

##### Shipping Approval



LRS



PRS



RINA

##### other

[Bestätigungen](#)

[sonstig](#)

[Umweltbestätigung](#)

#### Further information

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

##### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SB3344-6AA50>

##### Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SB3344-6AA50>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SB3344-6AA50>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SB3344-6AA50&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SB3344-6AA50&lang=en)

last modified:

10/07/2016