

AS-I COMPACT MODULE K20, IP67, A/B-SLAVE, DIGITAL, 4DI, 4 X INPUT FOR SENSOR(MECHAN./2- OR 3-WIRE) PNP, SENSOR SUPPLY FROM U_ASI "TOTAL MAX.200MA, " 4XM8-SOCKET



Figure similar

General technical data:		
Design of the product		digital I/O modules for operation in the field, IP67 - K20
Type		4 inputs
Design of the slave type		A/B slave
I/O configuration		0
ID/ID2 code		A/0
Number I/O sockets		4
Type of electrical connection of the inputs and outputs		M8 screw-type terminals
AS interface total current input max	mA	270
operating voltage according to AS-Interface spezifikation	V	26.5 ... 31.6
Ground terminal		not available
Addressing		using M12 female connector
AS interface Connection Polarity reversal protection		built-in
Sensor supply:		
Type of voltage supply for power supply		using AS-Interface

Input voltage	V	16.5 ... 30
Property of the sensor supply Short-circuit and overload resistant		Yes
Ampacity of the sensor supply for all inputs		
• at ambient temperature 40 °C	mA	200
• at ambient temperature 55 °C	mA	150

Inputs:

Number of digital inputs		4
Type of connection		2- and 3-wire technology
Input circuit		PNP transistor
Type of voltage of the input voltages		DC
Inputs switching level High min	V	10
Input current at digital input		
• for signal <1> minimum	mA	6
• with signal <0> maximum	mA	1.5
Inputs sensor supply using AS-Interface		short-circuit and overload resistant
Inputs socket assignment		
• PIN 1		sensor supply L+
• PIN 3		sensor supply L-
• PIN 4		data input
Design of the pin assignment of the inputs		standard assignment

Outputs:

Number of digital outputs		0
Status display		
• display of I/Os		yellow LED
• display of Uaux		not required
• display of AS-Interface/diagnostics		green/red dual LED
Assignment of data bits		
• socket		PIN 4 = IN1 (D0)
• socket 2		PIN 4 = IN2 (D1)
• socket 3		PIN 4 = IN3 (D2)
• socket 4		PIN 4 = IN4 (D3)

Ambient conditions:

Ambient temperature		
• during operation	°C	-25 ... +70
• during storage	°C	-40 ... +85
Protection class IP		IP67

Mechanical data:

Width	mm	20
Height	mm	108
Depth	mm	45

Mounting type	no mounting plate required
---------------	----------------------------

Certificates/ approvals:

AS-Interface certificate	yes
--------------------------	-----

Approvals	UL and CSA requested
-----------	----------------------



General Product Approval		Declaration of Conformity	Test Certificates	Shipping Approval
 CSA	 UL	 EAC	 EG-Konf.	spezielle Prüfbescheinigung n  ABS

Shipping Approval					other
 BUREAU VERITAS	 DNV	 LRS	 PRS	 RMRS	 ASi

other
Bestätigungen Umweltbestätigung sonstig

Further information

Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/industrial-controls/catalogs
Industry Mall (Online ordering system) http://www.siemens.com/industrymall
Cax online generator http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK2200-0CT30-0AA3
Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RK2200-0CT30-0AA3
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK2200-0CT30-0AA3&lang=en

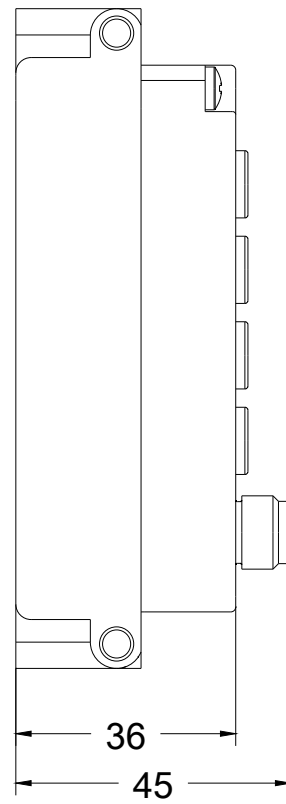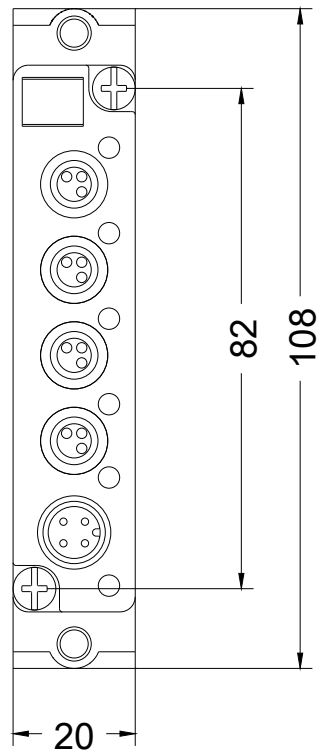

last modified:

10/07/2016