

22MM PLASTIC ROUND COMPLETE UNIT COMBINATION:
ACOUSTIC SIGNALING DEVICE CONTINUOUS TONE 2.4KHZ,
IP65 SOUND PRESS. MIN. 80 DB./10CM, WITH LAMP HOLDER BA
9S 115V AC/DC SCREW TERMINAL WITH HOLDER BLACK



Figure similar

Design of the product	Complete unit round
Enclosure:	
Shape of the enclosure front	round
Material of the enclosure	plastic
Number of command points	0
Actuator:	
Design of the operating mechanism	Acoustic signaling device
Product extension optional Light source	Yes
Color	
• of the actuating element	black
Material of the actuating element	plastic
Number of switching positions	0
Front ring:	
Product component front ring	No
Holder:	
Material of the holder	Plastic

Contact block/ lampholder:	
Number of lampholders	0
Number of switching elements	0
General technical data:	
Product function	
• positive opening	No
• EMERGENCY STOP function	No
Product component	
• Light source	No
Type of voltage	
• of the operating voltage	AC/DC
Protection class IP	IP65
Vibration resistance	
• acc. to IEC 60068-2-6	20 ... 200 Hz: 5g
Equipment marking	
• acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	H
• acc. to DIN EN 61346-2	P
• acc. to DIN EN 81346-2	P
Supply voltage:	
Type of voltage of the supply voltage	
• of the acoustic signal element	AC/DC
Supply voltage 1 of the acoustic signal element at AC	
• at 50 Hz rated value	115 V
• at 60 Hz rated value	115 V
Supply voltage 1 of the acoustic signal element at DC rated value	115 V
Auxiliary circuit:	
Number of NC contacts	
• for auxiliary contacts	0
Number of NO contacts	
• for auxiliary contacts	0
Number of CO contacts	
• for auxiliary contacts	0
Consumed current for rated value of supply voltage maximum	5 mA
Connections/ Terminals:	
Type of electrical connection	screw-type terminals
Tightening torque of the screws in the bracket	1 ... 1.2 N·m
Ambient conditions:	
Ambient temperature	

- during operation
- during storage

-25 ... +70 °C

-40 ... +80 °C

Environmental category during operation acc. to IEC 60721

3K6

Installation/ mounting/ dimensions:

Mounting type	front mounting
Shape of the installation opening	round
Mounting diameter	22 mm
Mounting height	10 mm
Installation width	28 mm
Installation depth	49 mm

Accessories:

Product component holder for 3 switching elements	No
---	----

Certificates/approvals

General Product Approval	Declaration of Conformity	Test Certificates	Shipping Approval
 CSA		 EG-Konf.	spezielle Prüfbescheinigungen n  ABS  DNV
Shipping Approval	other		
 LRS  PRS  RINA	Umweltbestätigung sonstig Bestätigungen		

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SB3234-7BA10>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SB3234-7BA10>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SB3234-7BA10>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SB3234-7BA10&lang=en

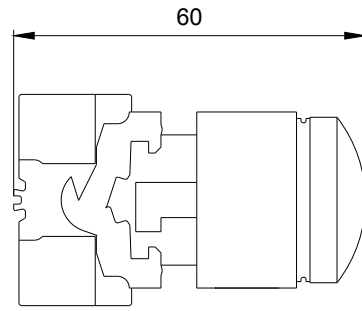

3SB3233-7BA10_ALL

last modified:

10/07/2016