


Product type designation

MDS D200 transponder

TRANSPONDER MDS D200 FOR RF200/ RF300 ISO/ MOBY D
PVC ISO CARD UP TO +60 DGR ISO 15693 CHIP TYPE, TI TAGIT
HFI, 265 BYTE USER MEMORY; 85 X 54 X 0.8 MM (LXDXH); -20
UP TO +60 DGR; MINIMAL ORDER QUANTITY 250 PCS

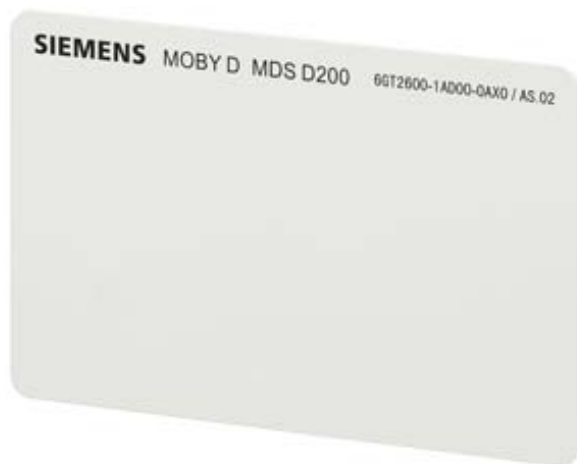

Wireless frequencies

Operating frequency / Rated value	13.56 MHz
-----------------------------------	-----------

Electrical data

Range / maximum	600 mm; range is reader dependent: observe http://support.automation.siemens.com/WW/view/en/67384964
Protocol / with radio transmission	ISO 15693
Transfer rate / with radio transmission / maximum	26.5 kbit/s
Product feature / multitag-capable	Yes
Product component / Backup battery	No

Memory

Type of memory	EEPROM
Storage capacity / of the user memory	256 byte
Type of memory organization	UID (fixed code) 8 bytes, user memory 256 bytes, configuration memory 8 bytes
Number of read cycles / at ambient temperature < 40 °C / maximum	100000000000000
Number of write cycles / at ambient temperature < 40 °C / maximum	1000000

Data retention time / at ambient temperature < 40 °C / not less than	10 y
Property of memory	Block-by-block write protection of the user memory
Type of transponder chip used	TI Tag-it HFI

Mechanical data

Material	PVC laminated plastic
Color	white
Mounting distance / relating to metal surfaces / recommended / minimum	25 mm

Permitted ambient conditions

Ambient temperature	
• during read/write access	-20 ... +60 °C
• outside the read/write area	-20 ... +60 °C
• during storage	-20 ... +60 °C
Protection class IP	IP67
Shock resistance	According to DIN EN 60721-3-7 Class 7 M3
Resistance to mechanical stress	Shock and vibration according to ISO 10373 / ISO 7810, torsion and twisting according to ISO 10373 / ISO 7816-3

Design, dimensions and weight

Width	54 mm
Height	0.8 mm
Depth	85 mm
Net weight	5 g
Mounting type	Gluing, mounting bag (see accessories)

Product properties, functions, components / general

Product feature	
• printable	Yes
Printing process	Printable on both sides

Standards, specifications, approvals

MTBF	228 y
------	-------

Accessories

accessories	Fixing strap, holder, spacer
-------------	------------------------------

Further Information / Internet Links

Internet-Link	
• to website: Selector SIMATIC NET SELECTION TOOL	https://support.industry.siemens.com/cs/ww/en/view/67384964
• to website: Industrial communication	http://www.siemens.com/ident/rfid
• to website: Industry Mall	https://mall.industry.siemens.com
• to website: Information and Download Center	http://www.siemens.com/industry/infocenter
• to website: Image database	http://automation.siemens.com/bilddb

- to website: CAx Download Manager
- to website: Industry Online Support

<http://www.siemens.com/cax>

<https://support.industry.siemens.com>

last modified:

10/14/2016