



piconet® coupling module for PROFIBUS-DP
4 digital pnp inputs filter 3 ms
4 digital outputs 0.5 A
SDPL-0404D-0003

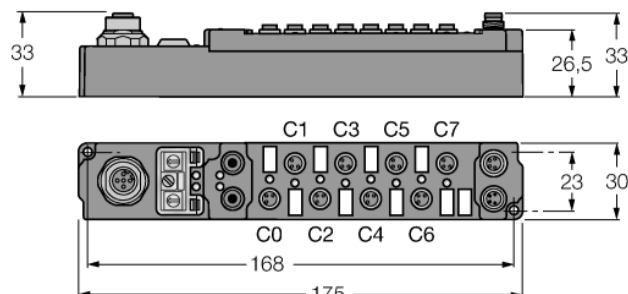


- configuration interface
- Configurable functions
- Supported via I/O-ASSISTANT 2
- Direct connection to the fieldbus
- Direct connection to the IP link
- Fibre-glass reinforced housing
- Encapsulated module electronics
- Metal connector
- Degree of protection IP67


Złącze magistrali M12 × 1




Wejście M8 × 1



Wyjście M8 × 1



Zasilanie M8 × 1



Typ	SDPL-0404D-0003
Nr kat.	6824173
Liczba kanałów	8
Napięcie pracy / obciążenia	20...29 VDC
Prąd pracy	≤ 100 mA
Prędkość transmisji sieciowej	9.6 kbps ... 12 Mbps
Adresowanie sieciowe	0 to 99
Interfejs serwisowy	parameterisation via I/O-ASSISTANT
Izolacja elektryczna	Fieldbus to operational voltage
Fibre-optic length	≤ 15 m
Liczba kanałów	4 digital inputs acc. to EN 61131-2
Napięcie wejściowe	20...29 VDC via operating voltage
Sygnał napięciowy niskiego poziomu	-3...5 VDC (EN 61131-2, type 2)
Sygnał napięciowy wysokiego poziomu	11...30 VDC (EN 61131-2, type 2)
Opóźnienie wejścia	3 ms
Maks. prąd wejścia	6 mA
Liczba kanałów	4 digital outputs acc. to EN 61131-2
Napięcie wyjścia	20...29 VDC from load voltage
Prąd wyjściowy na kanał	0.5 A, short-circuit proof
Typ obciążenia	resistive, inductive, lamp load
Częstotliwość przełączania	≤ 500 Hz
Współczynnik równoczesności	1
Dimensions (W x L x H)	30 x 175 x 26.5mm
Temperatura pracy	0...+55 °C
Temperatura składowania	-25 to 85 °C
Test wibracyjny	as per EN 60068-2-6
Test przeciążeniowy/wstrząsowy	acc. to DIN EN 60068-2-27
Kompatybilność elektromagnetyczna	according to EN 61000-6-2/EN 61000-6-4
Klasa ochrony	IP67
Certyfikaty	CE, cULus

piconet® coupling module for PROFIBUS-DP
4 digital pnp inputs filter 3 ms
4 digital outputs 0.5 A
SDPL-0404D-0003

LEDs

	LED designation	Status green	Status red	Function
PROFIBUS-DP	RUN / ERR (PB)	ON	ON	Module waits for communication
		OFF	ON	Module searching for set transmission rate
		OFF	OFF	Module waits for cyclic communication
		ON	flashes	Module has detected transmission rate / start-up fault
		ON	OFF	RUN I/O OFF: DP start-up successful, no data exchange
		ON	OFF	RUN I/O ON: Module is exchanging data
IP-Link / module status	RUN / ERR (I/O)	flickers/ON	OFF	Receiving error-free IP-Link protocols
		flickers	flickers	Receiving faulty IP-Link protocols
		OFF	flickers	Receiving faulty IP-Link protocols / system fault
		OFF	ON	No receipt of IP-Link protocols / module error
Inputs	0...3	OFF		Input inactive (not dampened)
		ON		Input active (dampened)
Outputs	4...7	OFF		Output inactive (not switched)
		ON		Output active (switched)
Power supply	U _B	OFF		Operating voltage U _B < 18 VDC
		ON		Operating voltage U _B ≥ 18 VDC
	U _L	OFF		Load voltage U _L < 18 VDC
		ON		Load voltage U _L ≥ 18 VDC

Dane z odwzorowania procesu

			Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Coupling module parameter Byte alignment is "disabled" (default) and the previous byte has been completely used. 4 bit input data and output data each are mapped.	Input	Byte 0	is used by the physically following bit-oriented extension module connected via the IP Link.				C1P2	C1P4	C0P2	C0P4
	Output	Byte 0					C3P2	C3P4	C2P2	C2P4
Coupling module parameter Byte alignment is activated. 1 byte input data and output data each are mapped.	Input	Byte 0	idle	idle	idle	idle	C1P2	C1P4	C0P2	C0P4
	Output	Byte 0	C3P2	C3P4	C2P2	C2P4	idle	idle	idle	idle

C... = Connector no., P... = Pin no.