


measuring light screen
emitter
BMEL4832A

TURCK

Industrial
Automation

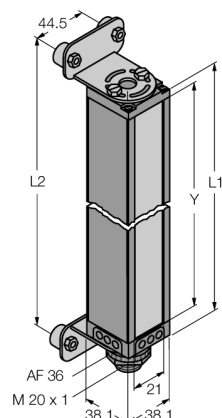

- Minimum target size 9.7 mm
- Scan field 1200 mm
- max. sensing range 4.6 m
- Operating voltage 11.8...12.2 VDC (from controller)
- Protection class IP65
- adjustment via software

Zasada działania

Measuring light screens are ideally suited for precise detection and inspection tasks such as product profiling, sizing, edge and centre guiding, hole and parts detection and the like. Each system consists of an emitter, receiver and a controller module, which is equipped with several switching and analogue outputs, depending on the specific version. The device also enables data transmission via RS232 or R485, either in an binary or ASCII code format. The scan times depend on the height of the measuring array and the adjusted scan mode. Detailed information can be taken from the instruction manual.

Typ	BMEL4832A
Nr kat.	3038535
Tryb pracy	Kurtyna świetlna
Rodzaj światła	IR
Długość fali	880 nm
Rozdzielczość optyczna	9.7 mm
Zasięg	600...4600 mm
Wysokość aktywna	1200 mm
Temperatura pracy	-20...+70 °C
Napięcie zasilania	11.4...14 V DC
Prąd bez obciążenia I ₀	≤ 1200 mA
Certyfikaty	CE
Certyfikaty	„UL” Certyfikat
Certyfikaty	CE
Wykonanie	Prostopadłościenny, Mini Array
Wymiary	38.1 mm x 38.1 mm x 1267 mm
Materiał obudowy	Metal, AL
Soczewka	tworzywo sztuczne, acrylic
Połączenie elektryczne	Złącze, 7/8"
Klasa ochrony	IP65