


- Compact camera with integrated ring light
- Housing material aluminium
- Glas inspection window
- Protection class IP68
- Lens to be ordered separately
- Separate controller required, type PPROCTL
- 1/3" CMOS, 752x480 pikseli
- Skala koloru RGB- / HSI

Schemat podłączenia

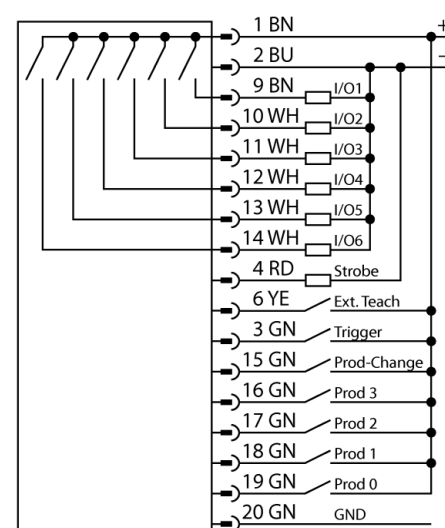

Zasada działania

The image processing system PresencePLUS PRO consists of the compact camera and the processing unit incorporated in a separate controller. Lens, external/internal lighting and connection cable are to be ordered separately. Freeware and firmware updates are available for download on:

www.bannerengineering.com

Typ	PPROCAMCSW-G
Nr kat.	3077034
Resolution	752 × 480 Pixel
Rodzaj światła	biały
Color temperature	5000...+8300K
Wymiary	143.3 x Ø104 mm
Materiał obudowy	Aluminium
Window material	szkło, przezroczyste
Klasa ochrony	IP68
Temperatura pracy	0...+50 °C
Nominalny prąd zasilania DC	≤ 550 mA

Akcesoria - okablowanie

Typ	Nr kat.		Rysunek wymiarowy
PPC06	3062409		
PPC06RA	3070827		