

Karta Techniczna

Dane główne i handlowe

Typ produktu	Na zewnątrz/Wnętrza - Oprawy wodoodporne
Model	Acciaio Extreme LED
Kod	A280EXSD
Opis	ACCIAIO EX LED 2X80 SD 4000K
Kod E.A.N.	8002219739469
Kolory do dyspozycji	Aluminium
Aplikacja	Strefy przemysł.,ATEX ZONE 02/22,Magazyny,Produkcja,Biura
Ciężar netto [kg]	3.3
Wymiary [mm]	1484x109x88
Ilość sztuk w opakowaniu	1

Dane techniczne

Klasa izolacji	I
Stopień IP	66
Wytrzymałość na uderzenia IK	09
Ognioodporność	960
Materiał	Aluminium odlewane
Napięcie	230
Częstotliwość [Hz]	50
Współczynnik mocy (cos (φ))	0.97
Moc oprawy [W]	74
Zakres temperatury otoczenia [°C]	-30 ÷ 50
Temperatura powierzchniowa [°C]	85
Zasilacz	LED Smart driver (programowalny) o stałym prądzie
Źródło	LED - CCT 4000 K - CRI 80
średni czas działania [h]	70000

Normy


2014/30/EU
2014/35/EU
2009/125/CE
CEI EN 60598-1
CEI EN 60598-2-1
EN 62471
874/2012/CE

Uwagi

Operating note: automatic regulation of power occur when operating temperature exceed the optimal condition
For ATEX Zone 02/22 (see catalogue for details)
Provided with through wiring
Also
available CRI 90 and others color temperature Led
Acc.:
KIT for EMERGENCY : Inverter Plug&Light or Inverter Led (see catalogue for details)
Acc.
Brackets for pole and adjustable wall installation (see catalogue for details)
Available the accessory with intelligent sensor, with Autodimmer functions, Presence sensor and control/ management via Smartphone [Opticom] (in this case need the Radio
Module connected to the products -see catalogue for details)
Luminaires with LED Smart Driver: remote control and programming by building automation modules (see catalogue for details).
Note: in relationship to the power of the product and the conditions of use, at the highest operating temperatures, thermal regulation can work to limit the output power in order to maintain the functionality of the product: Further information in LED Driver datasheet



Power* W	• Dimensions (mm) •			Weight max kg
L	B	H		
2x36	1199	109	88	3.3
2x58	1199	109	88	3.3
2x80	1484	109	88	4

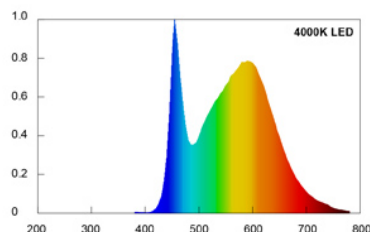

Znaki fabryczne

