

Pobierz

DXF 2D
- miecolumen.dxf

Montaggi
- MILANO_ECOLUMEN rev1.pdf



Milano ECOLUMEN

Adequate lighting ensures proper perception of the environment and enables us to feel comfortable with our surroundings. This is the concept underlying the creation of the Milano recessed floodlight, ideal for quick, low-cost installation in any exhibition setting and fulfil interior decorators' artificial lighting requirements.

Housing: Made of steel sheet.

Reflector: in white aluminium, high efficiency and anti-glare.

Diffuser: in plastic material anti-glare

Coating: Power-coated with a UV-resistant polyester epoxy pain.

Standard supply: Includes adjustable steel bracket.

Regulations: Manufactured in accordance with standards EN60598 – CEI 34


–21. Degree of protection in accordance with standards EN60529.

Power factor: >0,95

Luminous flux maintenance 70% 25000h (L70B50)

Photobiological safety class: exempt group EN62471.

Professional DALI dimmable product suited for spaces where lights stay on all day and night, ensuring high energy savings.

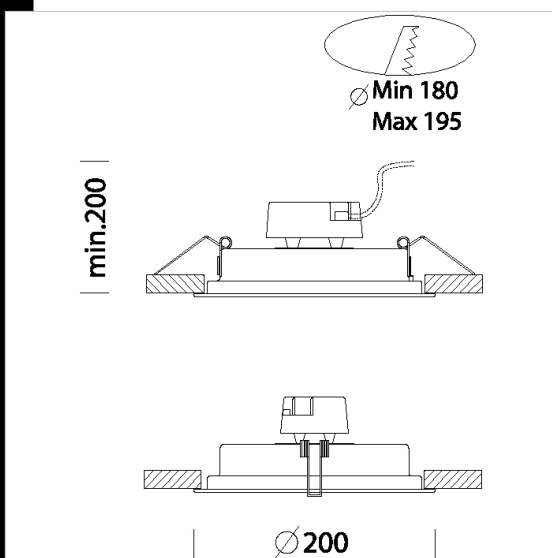

Kod	Okablowanie	Kg	Lumen Output-K-CRI	WTot	Kolor
22083911-00	CLD CELL	0.50	LED-2000lm-4000K-CRI 80	24 W	BIANCO
22083910-00	CLD CELL	0.50	LED-2000lm-3000K-CRI 80	26 W	BIANCO

Podana wartość strumienia świetlnego wskazuje wartość strumienia na wyjściu z oprawy, z tolerancją $\pm 10\%$ w stosunku do podanej wartości. Wtót wskazuje całkowitą moc pobieraną przez system i nie przekracza 10%