

00009371	DATA SHEET	
Valid from: 17.09.2018	EPIC® ZYLIN R 3.0 G1	

Description

- Circular connectors with solder termination, 21-pin and 26-pin
- highest contact density at small space requirements
- Connector in solder version for easy maintenance



General Characteristics

Series	ZYLIN R 3.0
Version	Male/Female
Contacts	(Male/Female 1-21) (Male/Female 1-26) (00009371/00009057) (00009894/00009005)
Pin configuration	Male E-part / Female P-part
Coding	N
Rated voltage (V)	24V AC / 60VDC
Rated impulse voltage	1,5 kV
Rated current (A)	7,5 A
Contact resistance	< 3 mOhm
Contacts	Copper alloy, gold plated
Number of contacts	26-pin
Termination methods	Solder termination: up to 1.0 mm ²
Cable clamping range	Ø3,2mm (4x)
Protection	IP 67 (maximum, dependant on cable gland used)
Cycle of mechanical operation	500
Temperature range	-40°C to +100°C, short-term up to +125°C


Materials and Surfaces

Housing	Nickel plated copper alloy
Insert	Thermoplastic
Sealing	Neoprene

Creator: MANA2/PDP Released: IVSE1/PDP	Document: DB00009371EN Version: 01	Page 1 of 3
---	---------------------------------------	-------------

00009371	DATA SHEET	
Valid from: 17.09.2018	EPIC® ZYLIN R 3.0 G1	

Technical Drawings

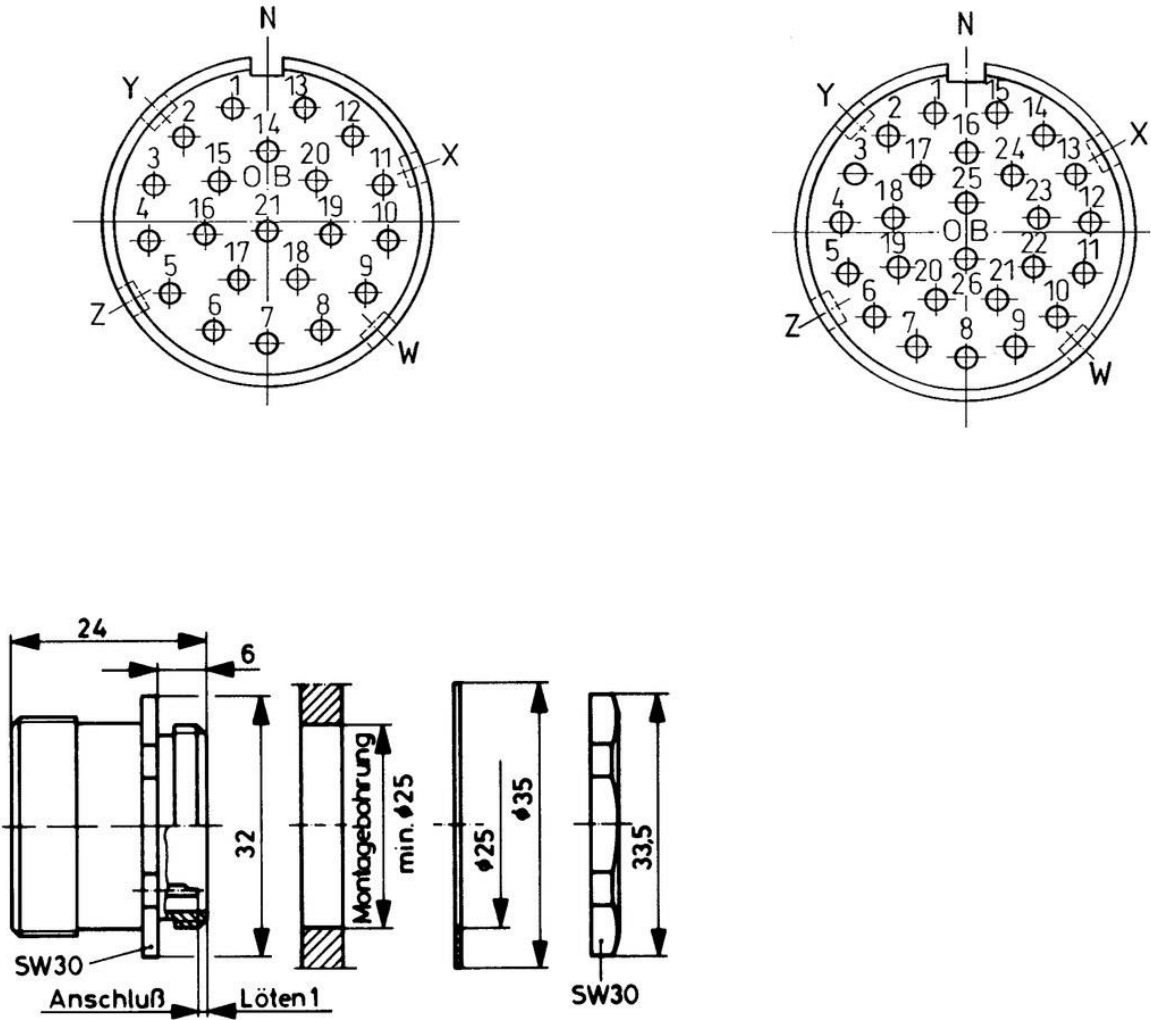

00009371	DATA SHEET	
Valid from: 17.09.2018	EPIC® ZYLIN R 3.0 G1	



Corrosion-resistant



Industrial machinery and plant engineering



Mechanical resistance



Space requirement

Application range

Machine and equipment manufacturing
Measurement and control technology

Remark

The housing is available with male or female inserts. The contact
Photographs are not to scale and do not represent detailed images of the respective products.

Creator: MANA2/PDP Released: IVSE1/PDP	Document: DB00009371EN Version: 01	Page 3 of 3
---	---------------------------------------	-------------