10426000	DATA SHEET	LAPP
Valid from: 17.09.2018	EPIC® H-A 3 Tgv	

Description

- Innovative metal and plastic housing design
- Housing in plastic or metal version. For power supply in the smallest possible space

General characteristics

Series	H-A 3
Version	Hood PG 11
Locking mechanism	bolts for single lever
Cable entry	straight
Protection (DIN EN 60529)	IP 65 (latched)
Protection (NEMA 250, UL50E)	4, 12 (latched)
Temperature range	-40°C to +100°C, short-term up to +125°C

Materials and surfaces

Housing	PA, grey

Approvals

VDE-Approval, VDE-REG.-Nr.	B437

Standards

Safety Standard	IEC 61984

We reserve all rights according to DIN ISO 16016.

MAST1 / 18.09.2018 / freigegeben

Drawings

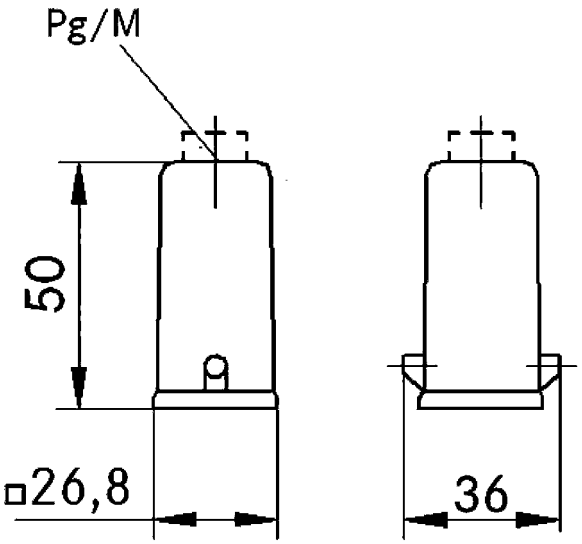

Industrial machinery and plant engineering

Mechanical resistance

Robust

Waterproof

Info

Compact, robust metal housings size H-A 3

Application range

Machine and equipment manufacturing
Control engineering
Electronic laboratory

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

We reserve all rights according to DIN ISO 16016.

MAST1 / 18.09.2018 / freigegeben