

|                           |                           |                                                                                     |
|---------------------------|---------------------------|-------------------------------------------------------------------------------------|
| 10462000                  | <b>DATA SHEET</b>         |  |
| Valid from:<br>17.09.2018 | <b>EPIC® H-A 16 AG-LB</b> |                                                                                     |

## Description

- These connectors are attractive because of their compact housing.
- Small and compact for applications with high number of contacts



## General characteristics

|                              |                                          |
|------------------------------|------------------------------------------|
| Series                       | H-A 16                                   |
| Version                      | Panel mount base                         |
| Locking                      | single lever                             |
| Protection (DIN EN 60529)    | IP 65 (latched)                          |
| Protection (NEMA 250, UL50E) | 4, 12 (latched)                          |
| Temperature range            | -40°C to +100°C, short-term up to +125°C |

## Materials and surfaces

|         |                                      |
|---------|--------------------------------------|
| Housing | Aluminium alloy, powder-coated, grey |
| Lever   | Steel, zinc-plated                   |
| Gasket  | NBR                                  |

## Approvals

|                            |      |
|----------------------------|------|
| VDE-Approval, VDE-REG.-Nr. | B437 |
|----------------------------|------|


## Standards

|                 |           |
|-----------------|-----------|
| Safety Standard | IEC 61984 |
|-----------------|-----------|

|                                           |                                       |             |
|-------------------------------------------|---------------------------------------|-------------|
| Creator: MANA2/PDP<br>Released: IVSE1/PDP | Document: DB10462000EN<br>Version: 01 | Page 1 of 2 |
|-------------------------------------------|---------------------------------------|-------------|

|                           |                    |                                                                                     |
|---------------------------|--------------------|-------------------------------------------------------------------------------------|
| 10462000                  | <b>DATA SHEET</b>  |  |
| Valid from:<br>17.09.2018 | EPIC® H-A 16 AG-LB |                                                                                     |

## Drawings

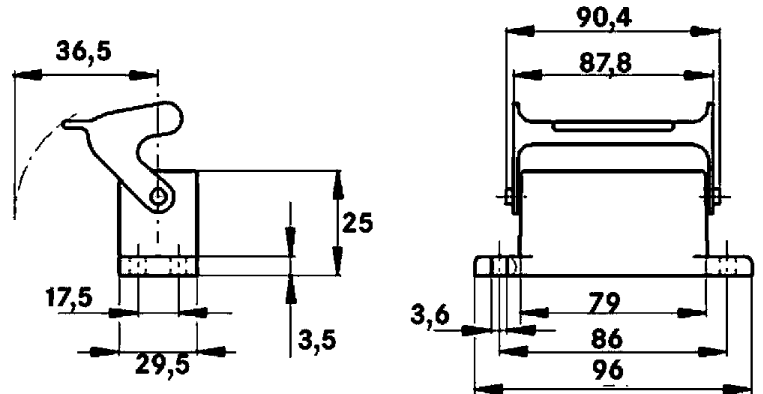

Industrial machinery and plant engineering



Mechanical resistance



Robust



Waterproof

## Info

Compact, robust metal housings size H-A 16

## Application range

Machine and equipment manufacturing  
Control engineering  
Electronic laboratory

## Remark

Photographs are not to scale and do not represent detailed images of the respective products.

|                                           |                                       |             |
|-------------------------------------------|---------------------------------------|-------------|
| Creator: MANA2/PDP<br>Released: IVSE1/PDP | Document: DB10462000EN<br>Version: 01 | Page 2 of 2 |
|-------------------------------------------|---------------------------------------|-------------|