

|                           |                        |                                                                                     |
|---------------------------|------------------------|-------------------------------------------------------------------------------------|
| 19042000                  | <b>DATA SHEET</b>      |  |
| Valid from:<br>17.09.2018 | <b>EPIC® H-B 10 TS</b> |                                                                                     |

## Description

- The smallest housing with single and double lever.
- The right housing is available for every application.



## General Characteristics

|                              |                                          |
|------------------------------|------------------------------------------|
| Series                       | H-B 10                                   |
| Version                      | Hood M20 / M25 (Article 19042100)        |
| Locking                      | Bolts for double lever                   |
| Gland Body                   | Yes                                      |
| Cable entry                  | Side                                     |
| Protection (DIN EN 60529)    | IP 65 (latched)                          |
| Protection (NEMA 250, UL50E) | 4, 12 (latched)                          |
| Temperature Range            | -40°C to +100°C, short term up to +125°C |

## Materials and Surfaces

|         |                                      |
|---------|--------------------------------------|
| Housing | Aluminium alloy, powder-coated, grey |
| Bolt    | Heat-treatable steel, zinc-plated    |

## Approvals

|                            |      |
|----------------------------|------|
| VDE-Approval, VDE-REG.-Nr. | B437 |
|----------------------------|------|



## Standard

|                 |           |
|-----------------|-----------|
| Safety Standard | IEC 61984 |
|-----------------|-----------|

|                                           |                                       |             |
|-------------------------------------------|---------------------------------------|-------------|
| Creator: MANA2/PDP<br>Released: IVSE1/PDP | Document: DB19042000EN<br>Version: 01 | Page 1 of 2 |
|-------------------------------------------|---------------------------------------|-------------|

|                           |                        |                                                                                     |
|---------------------------|------------------------|-------------------------------------------------------------------------------------|
| 19042000                  | <b>DATA SHEET</b>      |  |
| Valid from:<br>17.09.2018 | <b>EPIC® H-B 10 TS</b> |                                                                                     |

## Technical Drawings

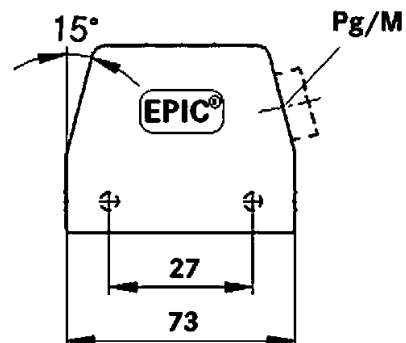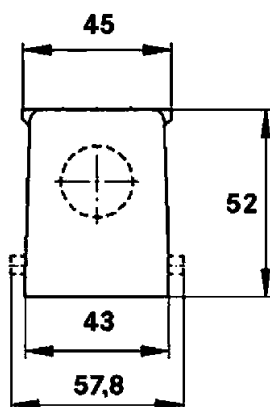

Automation



Industrial machinery and plant engineering



Mechanical resistance



Robust



Waterproof

### Info

Universal, robust metal housings size H-B 10

### Application range

Plant engineering  
Light & sound technology  
Plastics industry

### Remark

Photographs are not to scale and do not represent detailed images of the respective products.

|                                           |                                       |             |
|-------------------------------------------|---------------------------------------|-------------|
| Creator: MANA2/PDP<br>Released: IVSE1/PDP | Document: DB19042000EN<br>Version: 01 | Page 2 of 2 |
|-------------------------------------------|---------------------------------------|-------------|