

22260722	DATA SHEET	
Valid from: 17.09.2018	AB-C4-M12MS-PB-TR	

Description

- PROFIBUS M12 terminating resistor



General characteristics

Ambient Temperature (operation)	-25 to +90 °C (-13 to 194 °F)
Protection class	IP 65 / IP 67
Number of pins	4
Coding	B-inverse
Status indicator	No


Mechanical characteristics

Contact carrier, material	TPU GF
Gripping body, material	TPU, flame-retardant, self-extinguishing
Knurl, material	Zinc die-cast, nickel-plated
Flammability class acc. to UL 94	HB

Electrical characteristics

Rated voltage	60 V
Rated current (at 40 °C)	4 A
Contact resistance	5 mW
Surge voltage category	II
Pollution degree	3

Technical Drawing

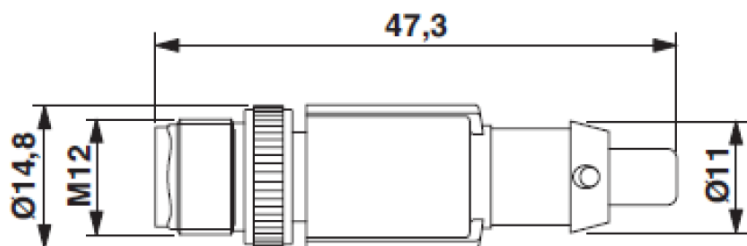

Application range

Machine and equipment manufacturing

Note

Photographs are not true to scale and do not represent detailed images of the respective products.

Creator: MOK02/PDP Released: IVSE1/PDP	Document: DB22260722EN Version: 03	Page 1 of 1
---	---------------------------------------	-------------