

22262051	DATA SHEET	
Valid from: 17.09.2018	AB-C4-M12FA-PG7-VA	

Product description

Sensor/Actuator connector, angled socket, 4-pos., M12, screw connection, stainless steel, cable screw connection Pg7



General properties

Ambient temperature	-25 to +85 °C
Protection degree	IP 67
Number of contacts	4
Outer diameter, cable	4.0 – 6.0 mm
Termination type	screw connection
Termination cross section, AWG	24 – 18
Termination cross section, mm ²	0.25 – 0.75
Mating cycles	≥ 100

Electrical properties

Rated voltage	250 V
Volume resistance	≤ 3mΩ
Insulation resistance	≥ 100 MΩ
Proof voltage, contact-contact	≥ 1.4 kV
Proof voltage, contact-housing	≥ 1.4 kV
Rated current	4 A
Overvoltage category	II
Pollution degree	3

Materials

Contact carrier	PA
Contact carrier, Inflammability class in accordance with UL 94	V0
Contacts, base material	CuZn
Contacts, surface	Au
Locking nut	stainless steel
Grip body	PA
Sealing	NBR / FKM


Standards

Product standard	M12-Connector acc. to DIN EN 61076-2-101
------------------	--


Creator: MANA2/PDP Released: IVSE1/PDP	Document: DB22262051EN Version: 04	Page 1 of 2
---	---------------------------------------	-------------

22262051	DATA SHEET	
Valid from: 17.09.2018	AB-C4-M12FA-PG7-VA	

Drawings

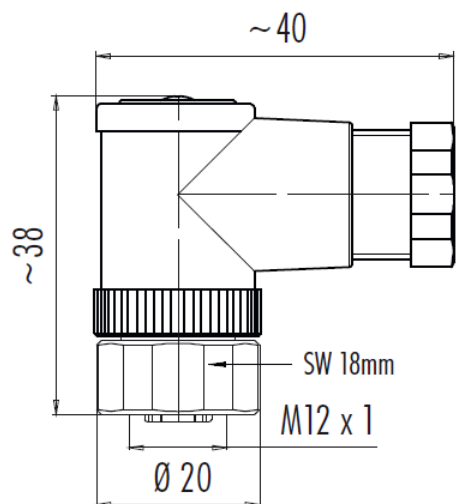

Pin assignment



Application range

Automation, industrial machinery and plant engineering

Note

Photographs are not true to scale and do not represent detailed images of the respective products.

Creator: MANA2/PDP Released: IVSE1/PDP	Document: DB22262051EN Version: 04	Page 2 of 2
---	---------------------------------------	-------------