

|                           |                       |                                                                                     |
|---------------------------|-----------------------|-------------------------------------------------------------------------------------|
| 52100600                  | <b>DATA SHEET</b>     |  |
| Valid from:<br>03.07.2018 | <b>SKINDICHT® D-M</b> |                                                                                     |


The SKINDICHT® D-M is a pressure screw with metric thread.



### Technical features:

|                   |                                        |
|-------------------|----------------------------------------|
| Material          | Brass, nickel-plated                   |
| Connecting thread | M12x1.5 up to M63x1.5 acc. to EN 60423 |
| Temperature range | -60°C up to +200°C                     |

### Norm references:

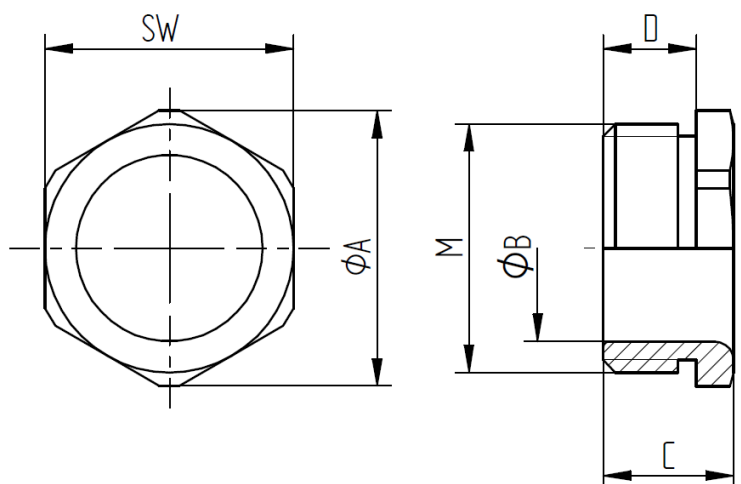

| Thread<br>M | Wrench Size<br>SW<br>mm | Diameter<br>Ø A<br>mm | Diameter<br>Ø B<br>mm | Length<br>C<br>mm | Thread Length<br>D<br>mm | Article No. |
|-------------|-------------------------|-----------------------|-----------------------|-------------------|--------------------------|-------------|
| M12x1,5     | 12                      | 13,2                  | 8,0                   | 8,0               | 5,5                      | 52100600    |
| M16x1,5     | 16                      | 17,6                  | 12,0                  | 8,5               | 6,0                      | 52100601    |
| M20x1,5     | 20                      | 22,2                  | 15,0                  | 10,5              | 7,5                      | 52100602    |
| M25x1,5     | 25                      | 27,5                  | 20,0                  | 11,5              | 8,0                      | 52100603    |
| M32x1,5     | 32                      | 35,2                  | 27,2                  | 12,0              | 8,0                      | 52100604    |
| M40x1,5     | 40                      | 43,5                  | 35,2                  | 14,0              | 9,5                      | 52100605    |
| M50x1,5     | 50                      | 54,0                  | 43,7                  | 16,0              | 10                       | 52100606    |
| M63x1,5     | 65                      | 70,9                  | 55,9                  | 17,5              | 11,5                     | 52100607    |

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

|                                                 |                                       |             |
|-------------------------------------------------|---------------------------------------|-------------|
| Creator: M. Wegerer /PDP<br>Released: DAMU1/PDP | Document: DB52100600EN<br>Version: 04 | Page 1 of 1 |
|-------------------------------------------------|---------------------------------------|-------------|