

55503476	DATA SHEET	
Valid from: 03.07.2018	SILVYN® LCC CONNECTOR	

The SILVYN® LCC Connector is a conduit coupler, for the extension of conduits.

Material: Body – Nickel plated brass
Seal – Elastomer


Features High tensile strength
Resistant to oil
Corrosion resistant
Chemical resistant
Conforms to DIN EN 61386-23



Temperature range: -50°C up to +135 °C

Note: Free of halogen, Sulphur and Phosphorous

Protection class: IP 65

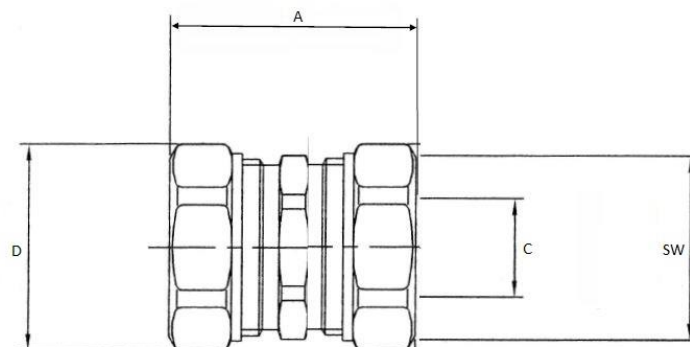

Dimension table:

Part No.	Part name	Nominal size	Length A mm	Inner Ø C mm	Outer Ø D mm	SW
5550 3476	SILVYN® LCC Connector	16	39,0	11,5	26	24
5550 3477	SILVYN® LCC Connector	20	39,5	15,3	29	26
5550 3478	SILVYN® LCC Connector	25	46,9	19,1	35	33
5550 3479	SILVYN® LCC Connector k	32	56	26	42	40

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

Creator: M. Wegerer /PDP Released: DAMU1/PDP	Document: DB55503476EN Version: 01	Page 1 of 1
---	---------------------------------------	-------------