

61800860	DATA SHEET	
Valid from: 03.07.2018	SILVYN® KCLICK PG	


SILVYN® KCLICK-GP is a straight, one piece conduit gland with push-in closure for quick secure assembly. Dismantle by sliding the locking sleeve. The gland is suitable for conduit type SILVYN® RILL.



Material:	Body – PA Seal – TPE
Features:	Push-In-Lock For coarse and fine profile conduits Simple dismantling High mechanical stress
Resistant:	To fuels, mineral oil, fat, alkalizes, glycols, acids, bases and common solvents
Temperature range:	-40°C up to +115°C
Colour:	Grey Black (UV-Resistant)
Norm Reference:	     UL FILENUMBER E308201
Note:	Self- extinguishing HB acc. to UL94 Free of silicone, cadmium and halogen
Protection class:	IP 68 acc. to EN 60529 IP 69 K Type-tested by VDE acc. to DIN 40050 T.9

Creator: M. Wegerer /PDP Released: DAMU1/PDP	Document: DB61800860EN Version: 06	Page 1 of 2
---	---------------------------------------	-------------

61800860	DATA SHEET	
Valid from: 03.07.2018	SILVYN® KCLICK PG	

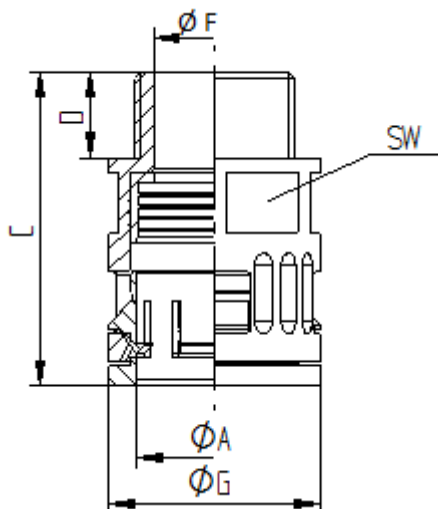

Dimensions table:

Part no.	Part name	Thread	SW	Article Designation Ø A mm	Outer Ø G mm	Inner Ø F mm	Length C mm	Thread length D mm
Grey								
6180 0860	SILVYN® KCLICK PG	PG 7	16	10	17	7	32,5	10
6180 0870	SILVYN® KCLICK PG	PG 9	18	13	20	10	35	10
6180 0880	SILVYN® KCLICK PG	PG 11	21	15,8	23	12,5	37	10
6180 0850	SILVYN® KCLICK PG	PG13,5	24	18,5	26	13,5	43	13
6180 0890	SILVYN® KCLICK PG	PG 16	27	21,2	29,5	17	46	13
6180 0900	SILVYN® KCLICK PG	PG 21	34	28,5	37	23,5	48,5	12,5
6180 0910	SILVYN® KCLICK PG	PG 29	40	34,5	44	30	53,5	14,5
6180 0920	SILVYN® KCLICK PG	PG 36	60	42,5	63	36	76	17
6180 0930	SILVYN® KCLICK PG	PG 48	70	54,5	74	47,5	88	17
Black								
6180 0865	SILVYN® KCLICK PG	PG 7	16	10	17	7	32,5	10
6180 0875	SILVYN® KCLICK PG	PG 9	18	13	20	10	35	10
6180 0885	SILVYN® KCLICK PG	PG 11	21	15,8	23	12,5	37	10
6180 0855	SILVYN® KCLICK PG	PG13,5	24	18,5	26	13,5	43	13
6180 0895	SILVYN® KCLICK PG	PG 16	27	21,2	29,5	17	46	13
6180 0905	SILVYN® KCLICK PG	PG 21	34	28,5	37	23,5	48,5	12,5
6180 0915	SILVYN® KCLICK PG	PG 29	40	34,5	44	30	53,5	14,5
6180 0925	SILVYN® KCLICK PG	PG 36	60	42,5	63	36	76	17
6180 0935	SILVYN® KCLICK PG	PG 48	70	54,5	74	47,5	88	17

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

Creator: M. Wegerer /PDP Released: DAMU1/PDP	Document: DB61800860EN Version: 06	Page 2 of 2
---	---------------------------------------	-------------