

6181 1110	DATA SHEET	
Valid from: 17.05.2018	SILVYN® KLICK-S	

SILVYN® KLICK-S is a conduit holder for protective conduits made of polyamide.
The SILVYN® KLICK-S is with the SILVYN® KLICK-V and SILVYN® KLICK-D easy to stack and to line as a system.
The conduit holder can be used in e.g. machine tool industry, apparatus construction or in the automation.



Material:

Polyamide 6

Technical Features:

Nominal wide

NW 7 up to NW 48

Temperature range

-40°C up to +105°C

Additional features:

Fire classification

V2 acc. to UL94

Free of halogen und phosphorus

UV-Resistant

SILVYN® KLICK-S black

Colour:

Grey

Black

Approbation:



Suitable conduits:

SILVYN® KLICK-V


SILVYN® KLICK-D

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

Creator: MAU1/PDP Released: DAMU1/PDP	Document: DB6181110EN Version: 02	Page 1 of 2
--	--------------------------------------	-------------

6181 1110	DATA SHEET	
Valid from: 17.05.2018	SILVYN® KCLICK-S	

Product drawing:

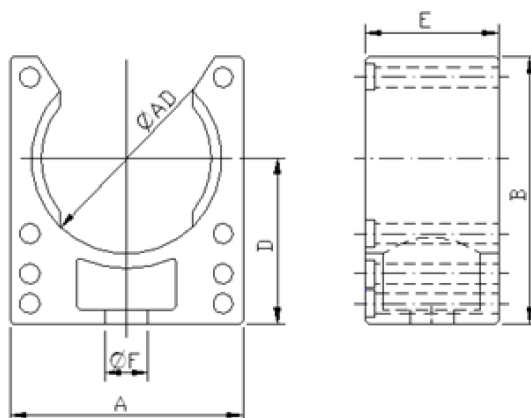

Dimension table:

Part No.	Nominal width NW	ØAD mm	A mm	B mm	D mm	E mm	ØF mm	Weight kg/100
SILVYN® KCLICK-S grey								
6181 1110	7	9,5	20,0	18,0	12,0	20,0	4,2	0,40
6181 1120	10	11,5	20,0	23,0	15,5	20,0	5,5	0,47
6181 1130	12	15,5	22,0	26,0	17,1	20,0	5,5	0,56
6181 1190	14	19,0	28,0	33,0	21,1	20,0	6,5	0,80
6181 1140	17	21,5	28,0	33,0	21,4	20,0	6,5	0,77
6181 1150	23	28,5	35,0	40,0	24,8	20,0	6,5	1,16
6181 1160	29	31,5	43,0	45,0	26,8	20,0	6,5	1,12
6181 1170	36	42,5	54,0	53,0	30,8	20,0	6,5	1,50
6181 1180	48	54,5	68,0	66,0	37,8	20,0	6,5	2,00
SILVYN® KCLICK-S black								
6181 1115	7	9,5	20,0	18,0	12,0	20,0	4,2	0,40
6181 1125	10	11,5	20,0	23,0	15,5	20,0	5,5	0,47
6181 1135	12	15,5	22,0	26,0	17,1	20,0	5,5	0,56
6181 1195	14	19,0	28,0	33,0	21,1	20,0	6,5	0,80
6181 1145	17	21,5	28,0	33,0	21,4	20,0	6,5	0,77
6181 1155	23	28,5	35,0	40,0	24,8	20,0	6,5	1,16
6181 1165	29	31,5	43,0	45,0	26,8	20,0	6,5	1,12
6181 1175	36	42,5	54,0	53,0	30,8	20,0	6,5	1,50
6181 1185	48	54,5	68,0	66,0	37,8	20,0	6,5	2,00