

Inline terminal - IB IL 400 MLR 1-8A - 2727365

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Inline power-level terminal blocks, electronic direct starter, up to 3.7 kW / 400 V AC



Product Description

The terminal is designed for use within an Inline station.
The single-channel power-level terminal features electronic motor protection.
The terminal enables a three-phase asynchronous motor to be switched, protected, and monitored via a bus system.

Your advantages

- ✓ Integrated electronic motor protection in accordance with IEC 60947-4
- ✓ Connection option for an external passive brake module
- ✓ Hand-held operator panel mode
- ✓ Motor control via OUT process data
- ✓ Motor current monitoring

Key Commercial Data

Packing unit	1 pc
GTIN	 4 017918 168483
GTIN	4017918168483

Technical data

Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

Dimensions

Width	63 mm
Height	224 mm
Depth	109 mm

Ambient conditions

Ambient temperature (operation)	-25 °C ... 55 °C
Ambient temperature (storage/transport)	-25 °C ... 85 °C
Permissible humidity (operation)	10 % ... 85 % (non-condensing)
Permissible humidity (storage/transport)	10 % ... 85 % (non-condensing)

Inline terminal - IB IL 400 MLR 1-8A - 2727365

Technical data

Ambient conditions

Air pressure (operation)	80 kPa ... 106 kPa (up to 2000 m above sea level)
Air pressure (storage/transport)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Degree of protection	IP20
Note	Notes on operation Line protection for the network supply line, max. 20 A. Observe derating of the POWER-COMBICON connector

Interfaces

Designation	Inline local bus
No. of channels	2
Connection method	Inline data jumper
Transmission speed	500 kbps
Transmission physics	Copper

Mains connection

Designation	Mains connection
Connection method	Power plug
Designation connection point	Terminal strip X11 and X12
Number of positions	5
Permissible conductor cross section	max. 2.5 mm ² (L1, L2, L3, N, PE (not leading))
Operating voltage	187 V AC ... 500 V AC +0 % (conductor voltage)
Max. current carrying capacity	20 A

Motor starter, output

Connection method	COMBICON
Number	1 (3 phases, short-circuit-proof with external conductor protection 20 A)
	1
Output name	Motor output
Designation connection point	Terminal strip X10
Number of positions	4
Permissible conductor cross section	1 mm ² ... 2.5 mm ²
Operating voltage	200 V AC ... 600 V AC +0 %
Frequency range	50 Hz ... 60 Hz
Nominal current range	0.2 A ... 8 A
Switching rate	max. 5 cycles per minute

Motor monitoring

Parameterization range	0.2 A ... 8 A (steps of 50/100/200 mA, via fieldbus)
Overspeed tripping	≥ 40 A (after 0.3 seconds)

Motor starter, brake

Number	1
Designation	Brake module (external)
Type of contact	Solid-state contact
Connection technology	COMBICON

Inline terminal - IB IL 400 MLR 1-8A - 2727365

Technical data

Thermistor input

Number of inputs	2
------------------	---

Digital inputs

Input name	Digital inputs
Number of inputs	1
Number of positions	4
Filter time	0.2 ms

Inline potentials

Designation	Communications power (U_L)
Supply voltage	7.5 V DC (via voltage jumper)
Current consumption	max. 50 mA
Power consumption	max. 0.375 W
Designation	Segment circuit supply (U_S)
Supply voltage	24 V DC (via voltage jumper)
Supply voltage range	19.2 V DC ... 28.8 V DC (including all tolerances, including ripple)
Current consumption	max. 160 mA
Power consumption	max. 4.2 W (entire device)

General

Mounting type	DIN rail
Net weight	550 g
Note on weight specifications	without plug
Operating mode	Process data mode with one byte
Note	Notes on operation Line protection for the network supply line, max. 20 A. Observe derating of the POWER-COMBICON connector
Diagnostics messages	Overcurrent Error message in the diagnostic code (bus) and display via the LED ERR on the module
	Output stage cannot be controlled Error message in the diagnostic code (bus) and display via the LED ERR on the module
	Module error during self test Message to the master
Assembly instructions	To safeguard sufficient ventilation, ensure that there is an installation clearance of a minimum of 50 cm both above and below.
Mounting position	Panel mounting on horizontal DIN rail

Standards and Regulations

Mechanical tests	Vibration resistance in acc. with EN 60068-2-6/IEC 60068-2-6 1g, evaluation criterion 1
	Shock in acc. with EN 60068-2-27/IEC 60068-2-27 10g, evaluation criterion 1
Protection class	I (MЭК 61140, EN 61140, VDE 0140-1)

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50

Inline terminal - IB IL 400 MLR 1-8A - 2727365


Technical data

Environmental Product Compliance

	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"
--	---


Drawings

Connection diagram

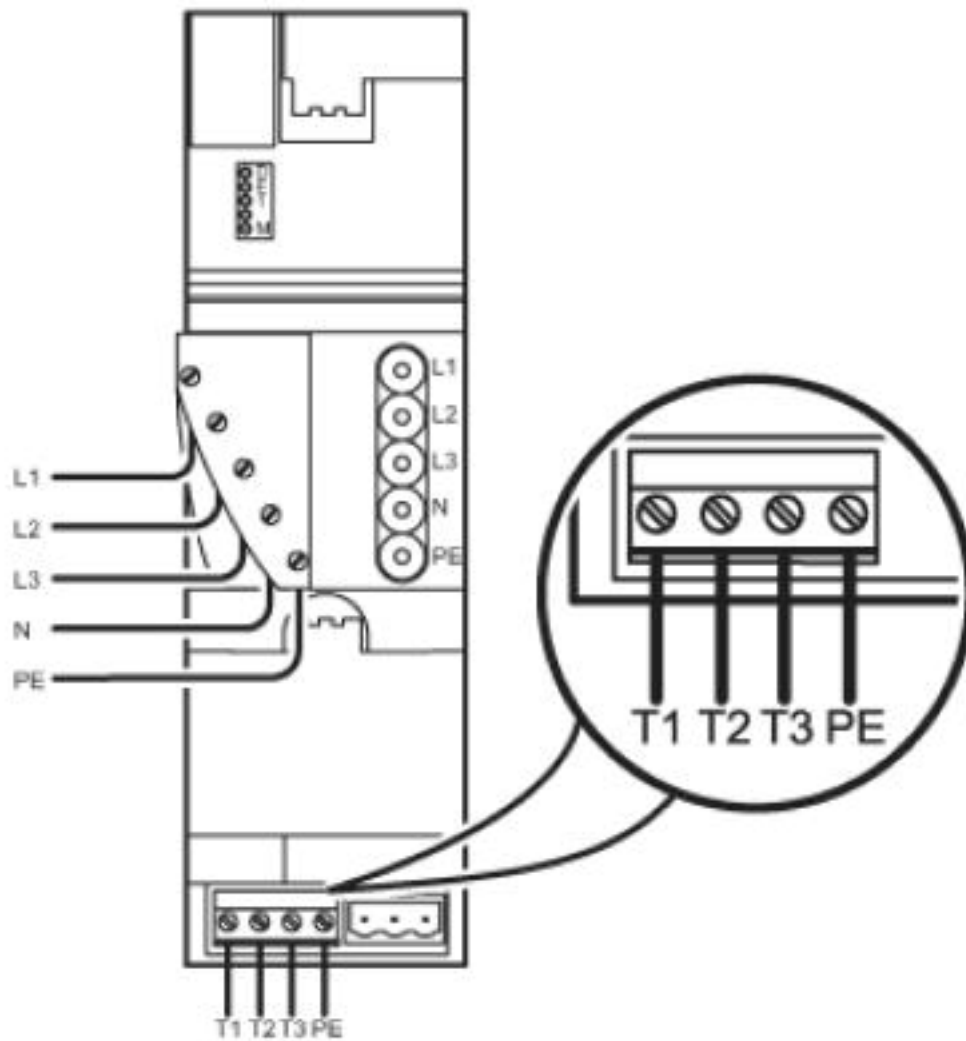


Inline terminal - IB IL 400 MLR 1-8A - 2727365

Dimensional drawing

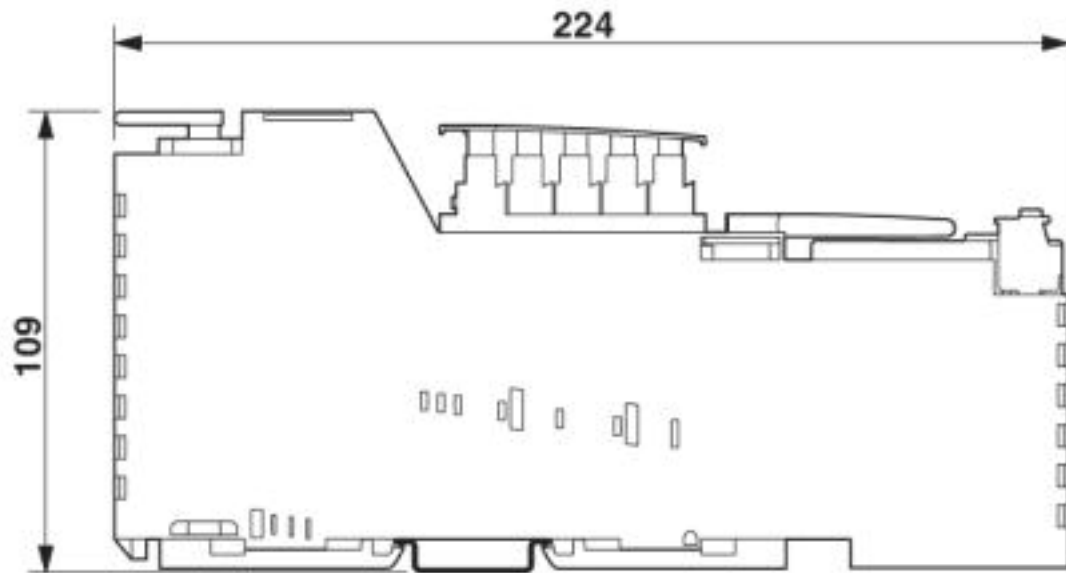

Inline terminal - IB IL 400 MLR 1-8A - 2727365

Block diagram

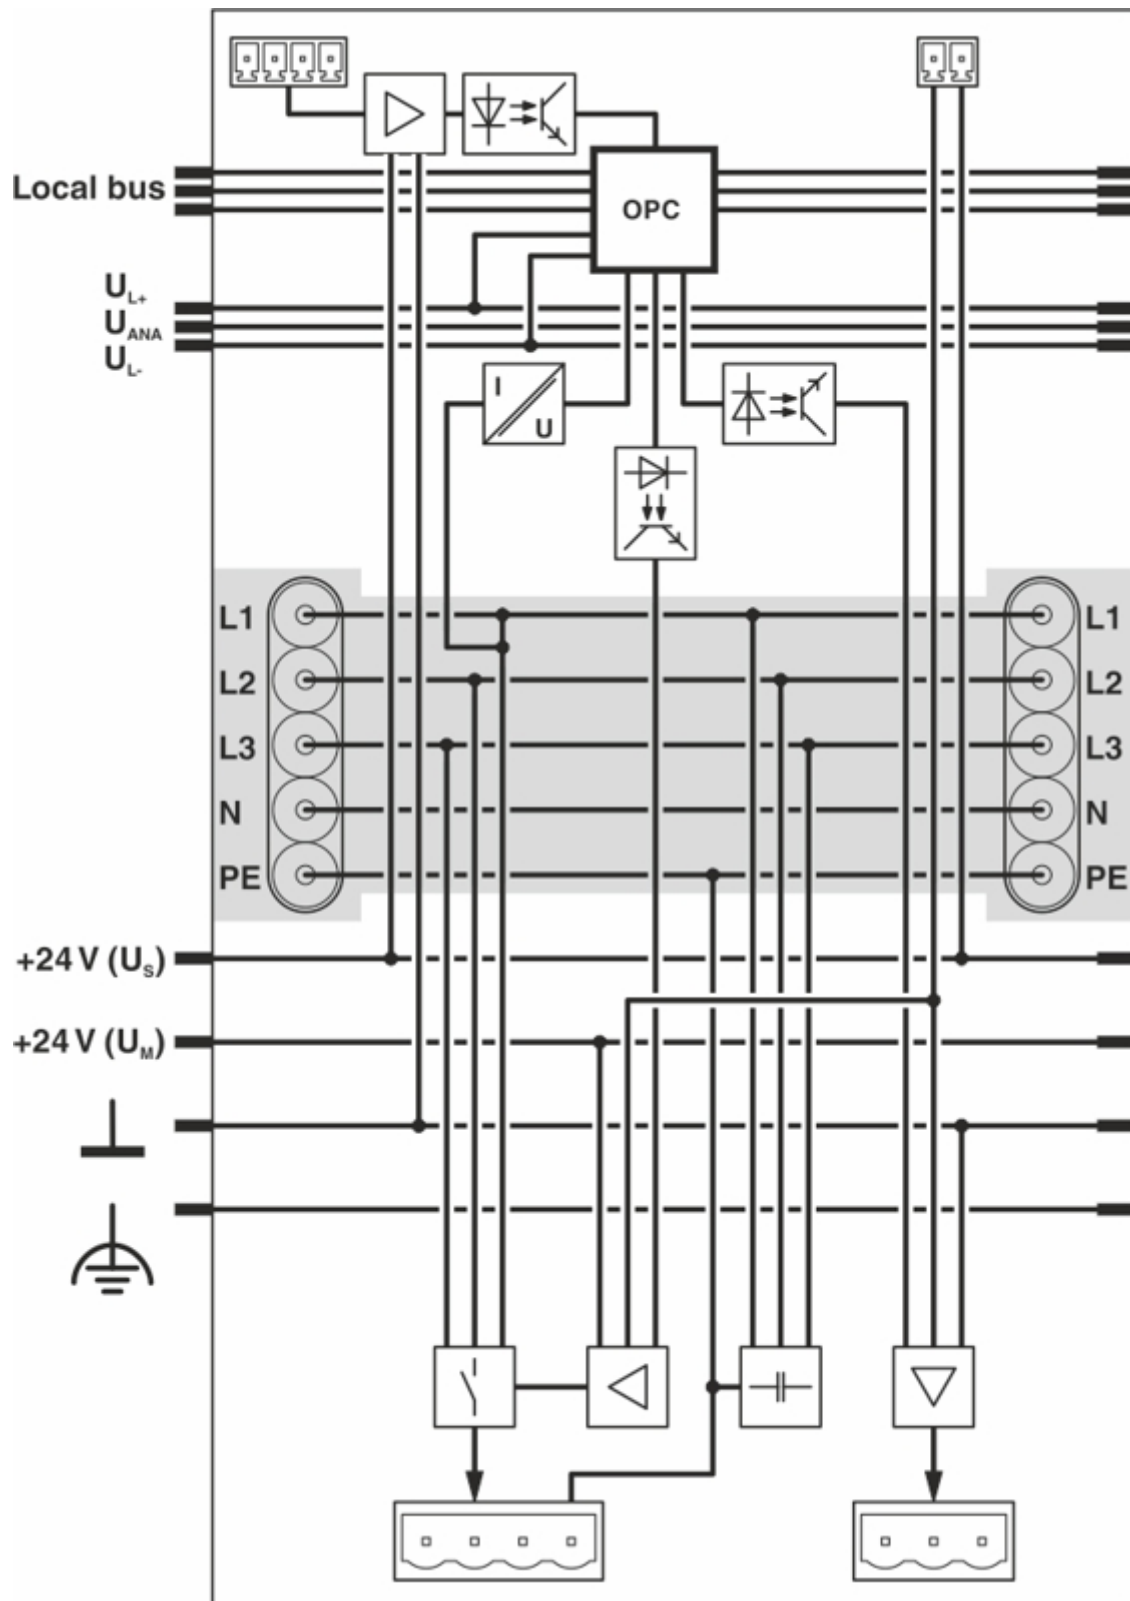

Inline terminal - IB IL 400 MLR 1-8A - 2727365

Approvals

Approvals

Approvals

UL Listed / cUL Listed / EAC / cULus Listed

Ex Approvals

Approval details

UL Listed



<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm> FILE E 228652

cUL Listed



<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm> FILE E 228652

EAC



EAC-Zulassung

cULus Listed



Phoenix Contact 2020 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>