

Power supply unit - ASI QUINT 100-240/2.4 EFD - 2736686

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Power supply unit für AS interface, 2.4 A, integrated ground fault detector, IP20 degree of protection

Product Description

Power supply unit for AS-Interface systems. Special modules with an output voltage range of 29.5 V - 31.6 V DC are used to supply the AS-Interface systems. The AS-i system also requires a data decoupling network in the power supply unit in order to be able to transmit communication signals along the power line. The ASI QUINT 100-240/2.4 EFD can supply an AS-i system with up to 2.4 A. Safety through automatic ground fault detection: if two ground faults occur in an AS-i system, this can cause the machines to inadvertently start up or not to be able to stop operation. The ASI QUINT has an integrated ground fault detection function. A ground fault is signaled via LED and via an alarm output.

Your advantages

- ✓ Integrated filters ensure that the modulated data flow is not affected
- ✓ Integrated ground-fault monitoring signals short circuits on the secondary side
- ✓ Wide-range input for operation on all common AC and DC networks



Key Commercial Data

Packing unit	1 pc
GTIN	
GTIN	4017918959678

Technical data

Dimensions

Width	55 mm
Height	145 mm
Depth	125 mm
Width with alternative assembly	122 mm
Height with alternative assembly	145 mm
Depth with alternative assembly	58 mm

Ambient conditions

Power supply unit - ASI QUINT 100-240/2.4 EFD - 2736686

Technical data

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-25 °C ... 70 °C (> 60 °C Derating: 2.5 %/K)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Max. permissible relative humidity (operation)	95 % (at 25 °C, non-condensing)

Input data

Nominal input voltage range	100 V AC ... 240 V AC
AC frequency range	45 Hz ... 65 Hz
Frequency range DC	0 Hz
Current consumption	approx. 1 A (120 V AC)
	0.5 A (230 V AC)
Nominal power consumption	72 W
Inrush current	< 15 A (typical)
Mains buffering time	> 20 ms (120 V AC)
	> 80 ms (230 V AC)
Input fuse	5 A (slow-blow, internal)
Recommended breaker for input protection	6 A ... 16 A (Characteristics B, C, D, K)

Output data

Nominal output voltage	30.1 V DC $\pm$ 1.5 %
Output voltage range	28 V DC ... 30 V DC
Nominal output current (I_N)	2.4 A
Connection in parallel	No
Connection in series	yes
Residual ripple	< 30 mV _{pp}
Output power	72 W
Typical response time	< 0.5 s
Peak switching voltages nominal load	< 50 mV _{pp}
Maximum power dissipation in no-load condition	3 W
Power loss nominal load max.	11 W

General

Net weight	0.75 kg
Operating voltage display	LED
Efficiency	> 86 % (for 230 V AC and nominal values)
Insulation voltage input/output	4 kV AC (type test)
	2 kV AC (routine test)
Degree of protection	IP20
MTBF (IEC 61709, SN 29500)	> 500000 h
Mounting position	horizontal DIN rail NS 35, EN 60715
Assembly instructions	alignable: horizontally 0 mm, vertically 50 mm

Connection data, input

Power supply unit - ASI QUINT 100-240/2.4 EFD - 2736686

Technical data

Connection data, input

Connection method	Pluggable spring-cage connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section flexible min.	0.2 mm ²
Conductor cross section flexible max.	2.5 mm ²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	14
Stripping length	9 mm
Screw thread	M3

Connection data, output

Connection method	Spring-cage connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section flexible min.	0.2 mm ²
Conductor cross section flexible max.	2.5 mm ²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	12
Screw thread	M3

Standards and Regulations

Electromagnetic compatibility	Conformance with EMC Directive 2004/108/EC
Noise immunity	EN 61000-6-2:2005
Connection in acc. with standard	CUL
Contact discharge	4 kV (Test Level 2)
Standards/regulations	EN 61000-4-3
Frequency range	80 MHz ... 1 GHz
Test field strength	10 V/m
Frequency range	1.4 GHz ... 2 GHz
Test field strength	3 V/m
Standards/regulations	EN 61000-4-4
Comments	Criterion B
Signal	1 kV (Test Level 2 - asymmetrical)
Standards/regulations	EN 61000-4-6
Frequency range	0.15 MHz ... 80 MHz
Voltage	10 V (Test Level 3)
Low Voltage Directive	Conformance with LV directive 2006/95/EC
Standard - Safety of transformers	EN 61558-2-17
Standard - Electrical safety	EN 60950-1/VDE 0805 (SELV)
	DIN VDE 0100-410
Standard - Electronic equipment for use in electrical power installations and their assembly into electrical power installations	EN 50178/VDE 0160 (PELV)

Power supply unit - ASI QUINT 100-240/2.4 EFD - 2736686

Technical data

Standards and Regulations


Standard - Safe isolation	DIN VDE 0100-410
	DIN VDE 0106-1010
Standard – Limitation of mains harmonic currents	EN 61000-3-2
UL approvals	UL/C-UL listed UL 508
	UL/C-UL Recognized UL 60950-1

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab “Downloads”, Category “Manufacturer’s declaration”

Drawings

Block diagram

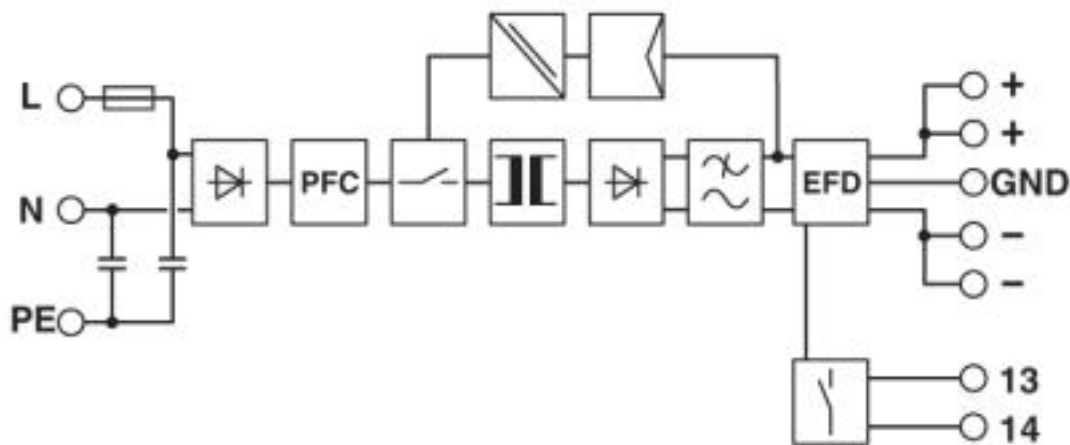

Approvals

Approvals

Approvals

UL Listed / UL Recognized / cUL Recognized / IECCE CB Scheme / cUL Listed / ASI-Interface / EAC / EAC / cULus Recognized / cULus Listed

Ex Approvals

Approval details

Power supply unit - ASI QUINT 100-240/2.4 EFD - 2736686

Approvals

UL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 123528
UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 211944
cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 211944
IECEE CB Scheme		http://www.iecee.org/	SI-1087
cUL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 123528
ASI-Interface			56301/ 14.06.04
EAC			EAC-Zulassung
EAC			RU C- DE.A*30.B.01082
cULus Recognized			
cULus Listed			

Phoenix Contact 2020 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>