
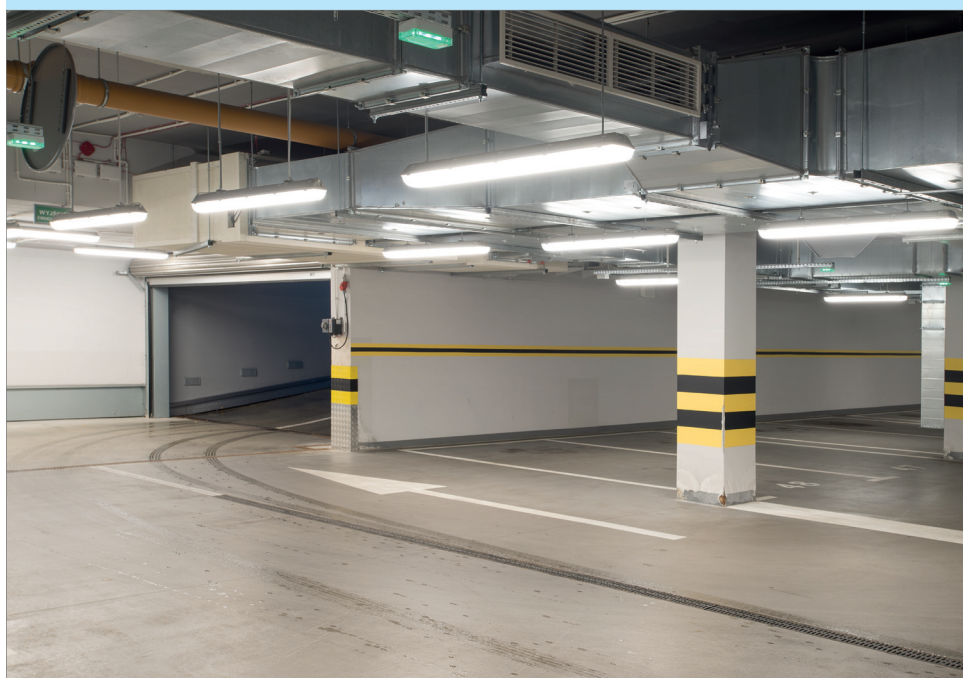


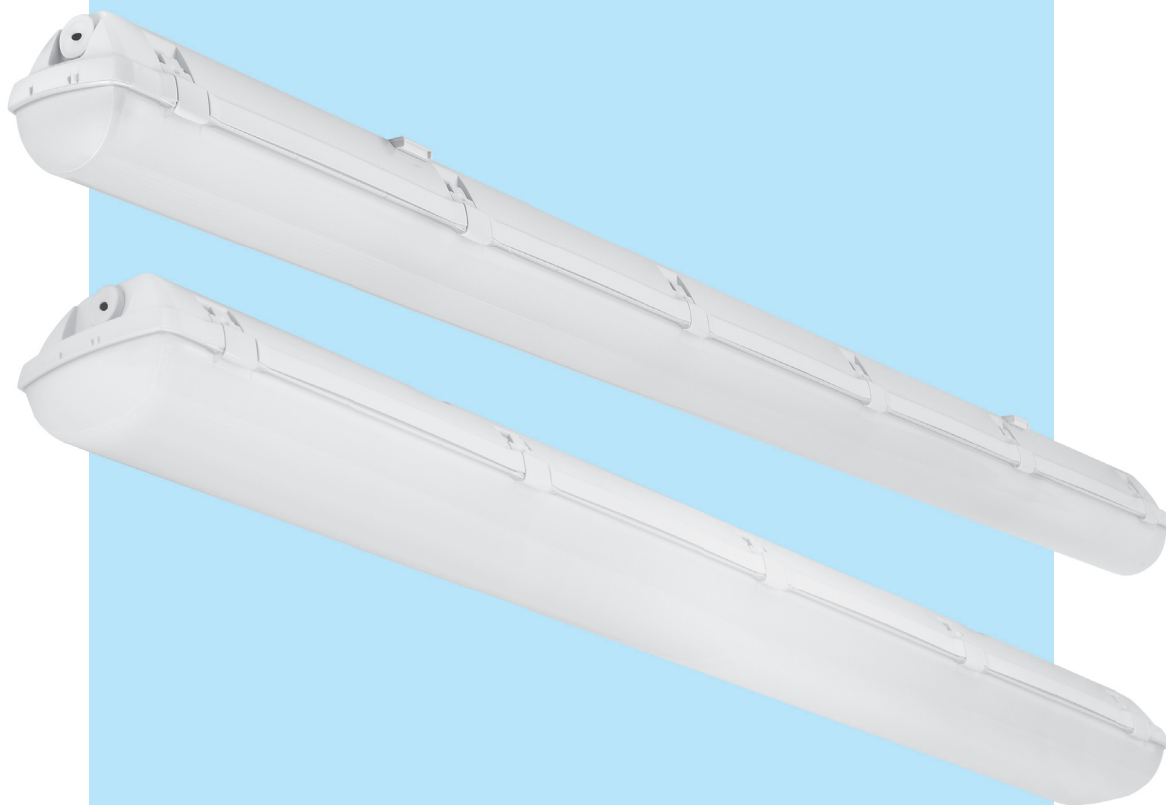

FIBRA Q LED

Wykonanie: podstawa z poliwęglanu PC odpornego na uderzenia. Klosz wewnętrznie ryflowany odporny na działanie promieniowania UV, wykonany z poliwęglanu PC. Klipsy wzmocnione włóknem szklanym. Możliwość montażu modułu awaryjnego. Dużym atutem oprawy jest klosz optyczny dzięki któremu niewidoczne są punkty świecące źródeł LED.

Montaż: nastropowy lub zwieszany

Akcesoria: klipsy ze stali nierdzewnej INOX, kratka ochronna

Zasilanie: 220 V - 240 V

Materials: base made of impact proof polycarbonate; grooven inside, UV stabilized, polycarbonate (PC) diffuser. Special optic diffuser hiding LED light sources. Fiber glass reinforced clips. Possibility of application of emergency module.

Installation: surface mounted or suspended

Accessories: stainless steel clips, protective grid


Power supply: 220 V - 240 V

FIBRA Q LED

NOWOŚĆ




L80 B10 >54 000h • SDCM 3 • LLMF 85% • CRI 84



Klipsy wzmocnione włóknem szklanym
Fiber glass reinforced clips



Klosz optyczny - brak widocznych punktów LED. Wersja 1x W = 95mm
Special optic diffuser hiding LED light sources. 1x version W = 95mm



Klosz optyczny - brak widocznych punktów LED. Wersja 2x W = 145mm
Special optic diffuser hiding LED light sources. 2x version W = 145mm

[mm]	MOC	ŹRÓDŁO	STRUMIEŃ OPRAWY	SKUTECZNOŚĆ OPRAWY	[kg]	KOLOR	KOD
[mm]	POWER	LAMP	LUMINAIRE'S LUMINOUS FLUX	LUMINAIRE'S EFFICACY	[kg]	COLOUR	CODE
95	19 W	LED 3000 K	2250 lm	118 lm/W	1,6	■	PX2040441
	19 W	LED 4000 K	2320 lm	122 lm/W	1,6	■	PX2040443
	22 W	LED 3000 K	2540 lm	115 lm/W	1,6	■	PX2040445
	22 W	LED 4000 K	2620 lm	119 lm/W	1,6	■	PX2040447
	29 W	LED 3000 K	3860 lm	133 lm/W	2,5	■	PX2040449
	29 W	LED 4000 K	3980 lm	137 lm/W	2,5	■	PX2040451
	35 W	LED 3000 K	4510 lm	129 lm/W	2,5	■	PX2040453
	35 W	LED 4000 K	4650 lm	133 lm/W	2,5	■	PX2040455
	40 W	LED 3000 K	5080 lm	127 lm/W	2,5	■	PX2040457
	40 W	LED 4000 K	5240 lm	131 lm/W	2,5	■	PX2040459
	36 W	LED 3000 K	4820 lm	134 lm/W	3,2	■	PX2040461
	36 W	LED 4000 K	4970 lm	138 lm/W	3,2	■	PX2040463
	43 W	LED 3000 K	5640 lm	131 lm/W	3,2	■	PX2040465
	43 W	LED 4000 K	5810 lm	135 lm/W	3,2	■	PX2040467
	49 W	LED 3000 K	6350 lm	130 lm/W	3,2	■	PX2040469
	49 W	LED 4000 K	6550 lm	134 lm/W	3,2	■	PX2040470
145	28 W	LED 3000 K	3840 lm	137 lm/W	2,4	■	PX2040479
	28 W	LED 4000 K	3960 lm	141 lm/W	2,4	■	PX2040480
	33 W	LED 3000 K	4560 lm	138 lm/W	2,4	■	PX2040481
	33 W	LED 4000 K	4700 lm	142 lm/W	2,4	■	PX2040482
	39 W	LED 3000 K	5280 lm	135 lm/W	2,4	■	PX2040483
	39 W	LED 4000 K	5440 lm	139 lm/W	2,4	■	PX2040484
	56 W	LED 3000 K	7670 lm	137 lm/W	3,3	■	PX2040485
	56 W	LED 4000 K	7910 lm	141 lm/W	3,3	■	PX2040486
	67 W	LED 3000 K	9110 lm	136 lm/W	3,3	■	PX2040487
	67 W	LED 4000 K	9390 lm	140 lm/W	3,3	■	PX2040488
	78 W	LED 3000 K	10520 lm	135 lm/W	3,3	■	PX2040489
	78 W	LED 4000 K	10850 lm	139 lm/W	3,3	■	PX2040490
	71 W	LED 3000 K	9740 lm	137 lm/W	4,2	■	PX2040491
	71 W	LED 4000 K	10040 lm	141 lm/W	4,2	■	PX2040492
	85 W	LED 3000 K	11570 lm	136 lm/W	4,2	■	PX2040493
	85 W	LED 4000 K	11930 lm	140 lm/W	4,2	■	PX2040494
	99 W	LED 3000 K	13370 lm	135 lm/W	4,2	■	PX2040495
	99 W	LED 4000 K	13780 lm	139 lm/W	4,2	■	PX2040496

AKCESORIA
ACCESSORIES

Klipsy ze stali nierdzewnej
Stainless clips available

Kratka ochronna
Protective grid




KOD	INFO	[kg]
CODE	INFO	[kg]
TV622490002430	L = 662 - 6x	0,20
	L = 1272 - 10x	
	L = 1572 - 12x	
PX2026618	700x230x130	2,00
PX2026636	1300x230x130	2,20
PX2026658	1600x230x130	2,65

Klipsy ze stali nierdzewnej
Stainless clips available

WYMIARY
DIMENSIONS

MOC	L	W	H	A
POWER	[mm]	[mm]	[mm]	[mm]
19 W	662	95	111	350
22 W	662	95	111	350
29 W	1272	95	111	700
35 W	1272	95	111	700
40 W	1272	95	111	700
36 W	1572	95	111	940
43 W	1572	95	111	940
49 W	1572	95	111	940
28 W	662	145	111	350
33 W	662	145	111	350
39 W	1272	145	111	700
56 W	1272	145	111	700
67 W	1272	145	111	700
78 W	1272	145	111	940
71 W	1572	145	111	940
85 W	1572	145	111	940
99 W	1572	145	111	940



FIBRA Q LED

