


SPX³-V

Vertical fuse carriers for blade type fuses

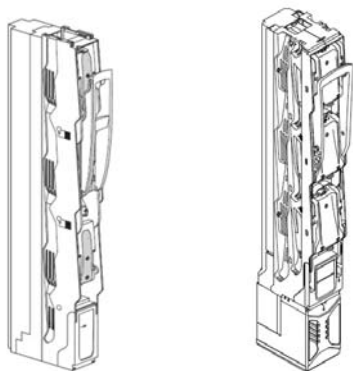

CONTENTS

CONTENTS	PAGES
1. USE	1
2. RANGE	1
3. DIMENSIONS	1
4. OVERVIEW	2
5. ELECTRICAL AND MECHANICAL CHARACTERISTICS	2
6. CONFORMITY	3
7. EQUIPMENTS AND ACCESSORIES	3
8. TABLES	3

1. USE


SPX³-V vertical in-line DIN 43 620 NH fuse without striker fuse carrier offers optimal solutions for protection against short-circuits and overloads, connection and disconnection of electric circuit parts without load or at full load in all the situations in which fuse could be the right answer to protection needs instead of circuit breakers. For 185mm busbar installations.

2. RANGE


I _n (A)	Reference
160	6 058 50
250	6 058 51
400	6 058 52
630	6 058 53

3. DIMENSIONS


Ref. 6 058 50

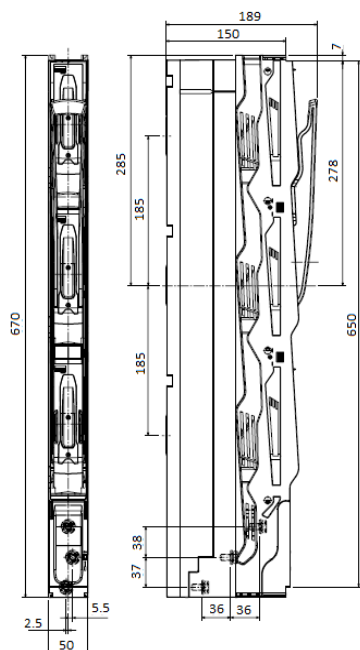

Ref. 6 058 50 (NEXT)

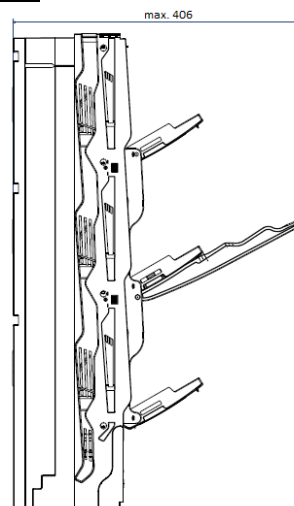


Ref. 6 058 51 / 2 / 3

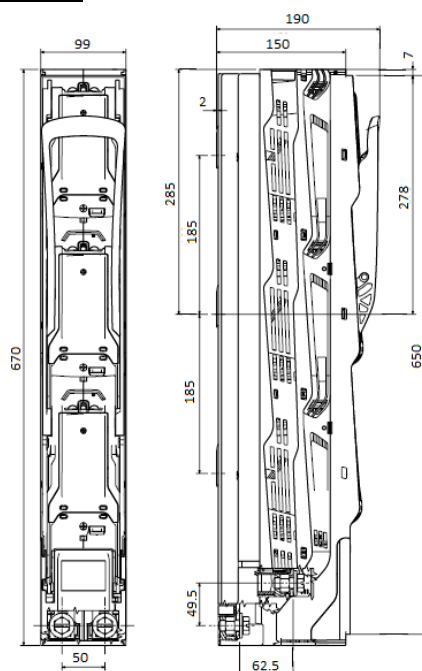

Vertical fuse carriers for blade type fuses

3. DIMENSIONS (NEXT)

Ref. 6 058 51 / 2 / 3 (NEXT)

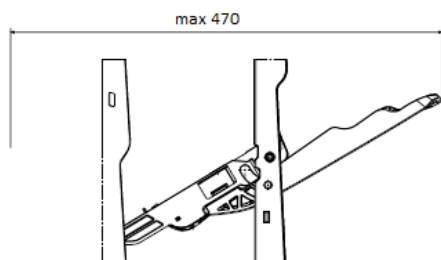

4. OVERVIEW

4.1 Mounting possibilities

On 185 mm collector rail:

- Vertical and horizontal

5. ELECTRICAL AND MECHANICAL CHARACTERISTICS

	SPX ³ -V 160A	SPX ³ -V 250A
Size	00	1
Nominal current I _n	160A	250A
Type of current	AC (50/60 Hz)	AC (50/60 Hz)
Nominal voltage U _n	690 V AC	690 V AC
Rated insulating voltage U _e	1000V	1000V
Rated impulse withstand voltage U _{imp}	8kV	8kV
Category of use EN 60947-3	400V	-
	500V	AC 23 B
	690V	AC 21 B (125A)
Conditional rated short-circuit current (with gG/gL fuses)	500V	100kA
	690V	100kA
Power dissipated by fuse carrier (without fuse component)	28W	24W
	SPX ³ -V 400A	SPX ³ -V 630A
Size	2	3
Nominal current I _n	400A	630A
Type of current	AC (50/60 Hz)	AC (50/60 Hz)
Nominal voltage U _n	690 V AC	690 V AC
Rated insulating voltage U _e	1000V	1000V
Rated impulse withstand voltage U _{imp}	8kV	8kV
Category of use EN 60947-3	400V	AC 23 B
	500V	AC 22 B
	690V	AC 21 B
Conditional rated short-circuit current (with gG/gL fuses)	500V	120kA
	690V	100kA
Power dissipated by fuse carrier (without fuse component)	60W	118W

5.1 Connections

Size	Screw terminal	Direct connection terminals	Prism connection (*)
00	M8 70 mm ²	-	flexible (from 1.5 mm ² to 95 mm ²) solid (from 1.5 mm ² to 10 mm ²)
1	M12 2 x 185mm ² - 240mm ²	1 x 35 - 150mm ² sm 1 x 50 - 185mm ² se 1 x 35 - 70mm ² rm 1 x 50mm ² re Md 32 - 40Nm 2 x 35 - 150mm ² sm 2 x 50 - 185mm ² se 2 x 35 - 70mm ² rm 2 x 35 - 50mm ² re Md 18 - 24Nm	-
2	M12 2 x 185mm ² - 240mm ²	1 x 35 - 150mm ² sm 1 x 50 - 185mm ² se 1 x 35 - 70mm ² rm 1 x 50mm ² re Md 32 - 40Nm 2 x 35 - 150mm ² sm 2 x 50 - 185mm ² se 2 x 35 - 70mm ² rm 2 x 35 - 50mm ² re Md 18 - 24Nm	-
3	M12 2 x 185mm ² - 240mm ²	1 x 35 - 150mm ² sm 1 x 50 - 185mm ² se 1 x 35 - 70mm ² rm 1 x 50mm ² re Md 32 - 40Nm 2 x 35 - 150mm ² sm 2 x 50 - 185mm ² se 2 x 35 - 70mm ² rm 2 x 35 - 50mm ² re Md 18 - 24Nm	-

(*)

Be careful to observe these rules in outing with **box terminals**:

- 1,5 - 70mm² **flexible cables**, directly or with wire-end ferrules**, depending on contour of the insulated lead 95mm² could be connectable;
- from 1.5 mm² to 10 mm² - **solid round**;

** flexible cables of maximum cross-section may not fit when using wire-end ferrule

sm: stranded sectored

se: solid sectored

rm: stranded round

re: solid round

f: flexible

AE: wire-end ferrules

SPX³-V

Reference(s) : from 6 058 50 to 6 058 53

Vertical fuse carriers for blade type fuses

6. CONFORMITY

IEC 60 947-3

6.1 MARKING

SPX³-V
I_n 160 A 
6 058 50

U_e 690 V a.c. 50/60 Hz
DIN VDE 0636-201
IEC/EN 60947-3

IEC 60269-2-1
NH00 P_v 12 W 

AC-22B	500 V	160 A
AC-23B	400 V	160 A



7. EQUIPMENTS AND ACCESSORIES

7.1 Mechanical accessories

Signalling contact

- Auxiliary switch contact (250 V AC / 5 A, 30 V DC / 4 A)
ref. 6 052 30

7.2 Connection accessories

Cage terminals

- Prism terminals for copper and aluminium rail
70-240 mm² (size 1/2/3)
120-400 mm² (size 1/2/3)
ref. 6 058 66
ref. 6 058 67

7.3 Busbar support

Collector rail supports for 185 mm phase offset
universal busbar support 185mm for drilled and undrilled flat busbars
30, 40, 60, 80, 100, 120 x 10
ref. 6 058 80

7.4 Current transformers

Accuracy class 1, secondary rated current 5A

- Rated current 80A (size 00)
Rated current 150A (size 00)
Rated current 150A (size 1/2/3)
Rated current 200A (size 1/2/3)
Rated current 250A (size 1/2/3)
Rated current 400A (size 1/2/3)
Rated current 600A (size 1/2/3)
ref. 6 058 70
ref. 6 058 71
ref. 6 058 73
ref. 6 058 74
ref. 6 058 75
ref. 6 058 76
ref. 6 058 77

8. TABLES

8.1 Maximum fuses power ratings

			DIN 43 620 Fuses ratings (A)			
SPX ³ -V	I _n (A)	P _{max} (W)	aM	gG	gR	aR
00	160	12	125	160	32	40
1	250	23	250	250	63	80
2	400	34	400	400	125	125
3	630	48	500	630	160	200

Please note: these values are for guidance only; check compliance of fuses maximum power dissipation and rated current on corresponding datasheets