


Surface mounting push-buttons, narrow version

Cat. No(s): 0 860 85/88 - 0 861 85/88



0 861 88



0 860 85

1. USE


Lighting control mechanism with or without marking components (locator light).

2. RANGE

Description	Complete	Configurable
Poussoir	0 860 85	0 861 85
Poussoir à voyant	0 860 88	0 861 88


Indicator light product:

Light function possible using lamp Cat. No. 0 899 01/02/07.

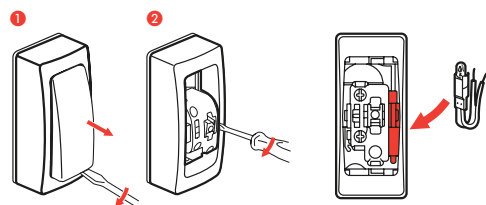


3. DIMENSIONS (mm)

Complete

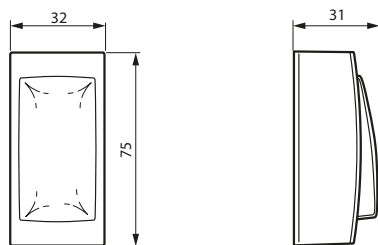

Configurable

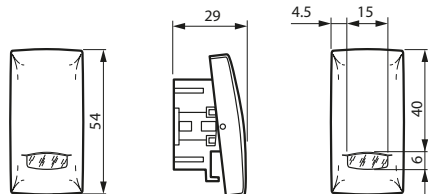

4. CONNECTION

■ 4.1 Connection

Type of terminals: with screws

Terminals capacity: 2 x 2.5 mm²


Option of two wires per terminal for tapping

Stripping length: 7 mm


Screwdriver: Posidrive 1, Philips 1, flat 4 mm.

■ 4.2 Wiring diagrams

0 860 88 - 0 861 88



0 860 85 - 0 861 85



5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Protection against solid bodies and liquids: IP 31D (complete product)

Protection against impact: IK 04

■ 5.2 Material characteristics

Plate, frame, coverplate: ABS

Colour: White RAL 9003

UV resistant

Self-extinguishing:

+ 850° C / 30 s for insulating parts holding live parts in place.

+ 650° C / 30 s for other parts made of insulating materials.

■ 5.3 Electrical characteristics

Voltage: 250 V~

Current: 6 A

Frequency: 50 Hz

■ 5.4 Climatic characteristics

Use and storage temperature: - 5° C to + 40° C

6. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichlorethylene.

Maintenance with the following products: Hexane (EN 60669-1), Methylated spirit, Soapy water, Diluted ammonia, Bleach diluted to 10%, Window-cleaning products.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. ACCESSORIES

Lamps



0 899 01	12 V	White incandescent - Power consumption 0.4 W
0 899 02	24 V	White incandescent - Power consumption 0.8 W
0 899 07	230 V	Low power consumption green fluorescent

8. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.

Refer to e. catalogue.