


HD/HC/HS4292



HD/HC/HS4282

1. USE

Devices for current audio-video and other networks .


2. RANGE

NEW AUDIO-VIDEO SOCKETS		Cat. No.
	Audio socket - jack 3.5	☐ HD4280 ☐ HC4280 ☐ HS4280
	Audio socket - RCA x 2	☐ HD4281 ☐ HC4281 ☐ HS4281
	Connector for home cinema loudspeakers	☐ HD4294 ☐ HC4294 ☐ HS44294
	5 pole DIN connector for hi-fi and similar devices - to weld	☐ HD4292 ☐ HC4292 ☐ HS4292
	Video socket - HD15	☐ HD4282 ☐ HC4282 ☐ HS4282
	RCA x 3	☐ HD4283 ☐ HC4283 ☐ HS4283
OTHER SOCKETS		
	Mini socket 2P - Contact tubes Ø 3 mm Center line of holes 13 mm - For auxiliary and similar circuits - 6 A - 24 V - SELV Terminal connection for plug 2120.	☐ HD4291 ☐ HC4291 ☐ HS4291
	2 pole DIN connector - to weld	☐ HD4293 ☐ HC4293 ☐ HS4293
	HDMI socket	☐ HD4284 ☐ HC4284 ☐ HS4284
	USB socket	☐ HD4285 ☐ HC4285 ☐ HS4285

Color code:

☐ White
☒ Tech
☒ Anthracite
☐ Neutral

3. OVERALL DIMENSIONS (mm)

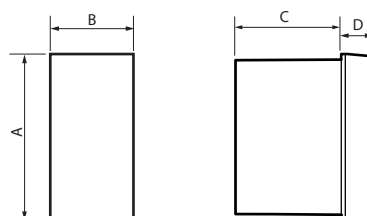

References	A	B	C	D
HD/HC/HS4280	45	22.5	20.85	9.5
HD/HC/HS4281	45	22.5	20.85	15
HD/HC/HS4282	45	45	11.7	15
HD/HC/HS4283	45	45	11.7	15
HD/HC/HS4284	45	45	11.7	14
HD/HC/HS4285	45	22.5	20.85	10
HD/HC/HS4291	45	22.5	29	9.5
HD/HC/HS4292	45	22.5	12	9.5
HD/HC/HS4293	45	22.5	12	9.5
HD/HC/HS4294	45	22.5	20	15

4. CONNECTION

Stripping length (rigid or flexible cables): 12 mm for screwless terminals depending of the items numbers.

5. TECHNICAL CHARACTERISTICS

■ 5.1 Protection index

Penetration by solid bodies/liquid: IP 21 D

Impact test: IK 04

■ 5.2 Material characteristics

Material: Polycarbonate for mechanism case

PC for key cover

Colour: Anthracite, White, Tech

Halogen free.

UV resistant.

Self-extinguishing:

+ 850° C / 30 s for insulating parts holding live parts in place.

+ 650° C / 30 s for other parts made of insulating materials

■ 5.3 Climatic characteristics

Storage and operating temperatures: - 5° C to + 35° C

6. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.

Refer to e. catalogue.