


Mosaic™ TV/R/SAT sockets

Cat. No(s): 0 787 86 - 0 791 86L - 0 792 96



0 791 86L


1. USE

TV/R/SAT: for receiving TV, radio and satellite signals.
UHD (ultra high definition) compatible.
Class A shielded star sockets LTE Ready (4G protected).
Recommended coaxial cable 17/19 VATC.
Single cable entry.
Can be flush mounted in a box min. 40 mm deep.
To be equipped with plate.

2. RANGE


Description	White	Alu	Matt Black
TV/R/SAT socket - FM radio + DAB+ 2 modules	0 787 86	-	0 791 86L
TV/R/SAT socket - FM radio 2 modules	-	0 792 96	-

3. DIMENSIONS (mm)


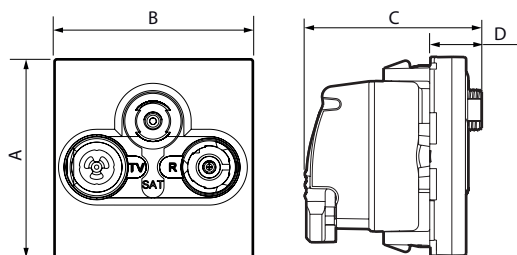


A	B	C	D
45	45	39.5	11.5

4. CONNECTION

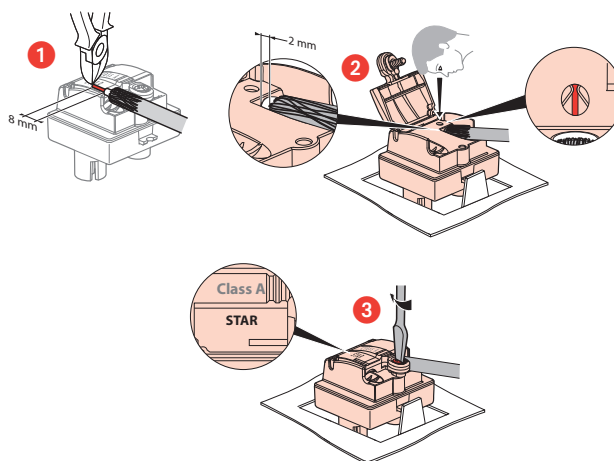

5. WIRING PRECAUTIONS

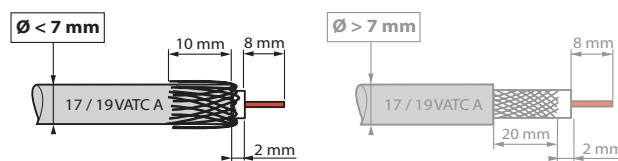

By restricting deformation of the coaxial cable, the rear connection avoids impedance discontinuity, thereby sustaining performance.

6. TECHNICAL CHARACTERISTICS

■ 6.1 Mechanical characteristics

Protection against impacts: IK 04
 Protection against solid/bodies and liquids: IP 21
 Cable resistance: 120 N

■ 6.2 Material characteristics

Cover plate: ABS
 White RAL 9003
 Painted Aluminium varnished gliettery
 Painted Mat Black RAL 9017 satin

Halogen-free
 UV-resistant

Motor:

Box: Zamac
 Cover: Zamac
 Pin: Bronze
 Screws: Steel

Self-extinguishing:

850°C/30 s for insulating parts holding live parts in place.
 650°C/30 s for other parts made of insulating materials.

■ 6.3 Electrical characteristics

- Male connector Ø 9.52 mm (TV)
- Female connector (Radio)
- Female F screw-type connector (SAT)

Characteristic impedance: 75 ohm

Class A shielding efficiency (class A shielding is necessary to prevent interference caused by using new 3 and 4 G phone signals, as these unwanted signals can result in pixellation on screen or adversely affect the sound track).

Frequency bands: TV: 5-68 / 120-862 MHz

R: 87.5-108 MHz

SAT: 950-2400 MHz

Attenuation : < 1.5 dB maximum

■ 6.4 Climate characteristics

Storage temperature: -10°C to +70°C

Usage temperature: -5°C to +35°C

7. CLEANING

Surface cleaning with a cloth.

Do not use acetone, tar remover, trichloroethylene.




Resistant to the following products: Hexane (NF C 61-314), Methylated spirit, soapy water, diluted ammonia, bleach diluted to 10 %, window-cleaning products, pre-impregnated wipes.

Caution: Always test before using special cleaning products.

8. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.
 See e-catalogue.

9. PERFORMANCES

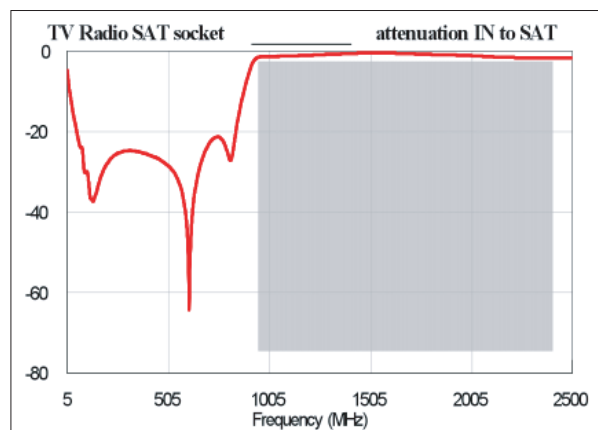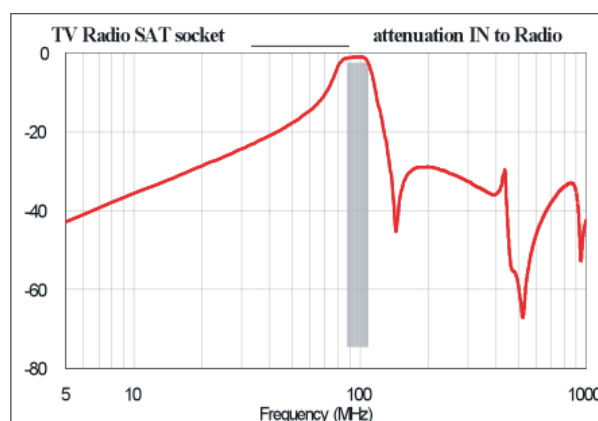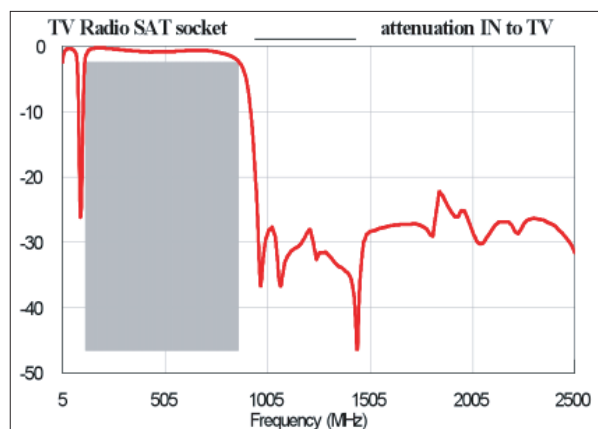

DAB Radio TV sockets

